

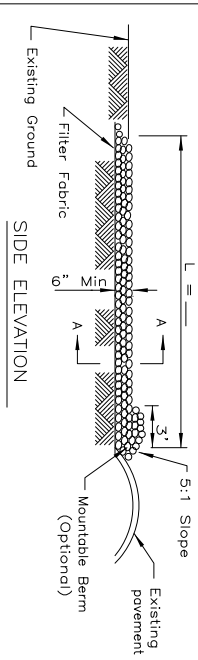
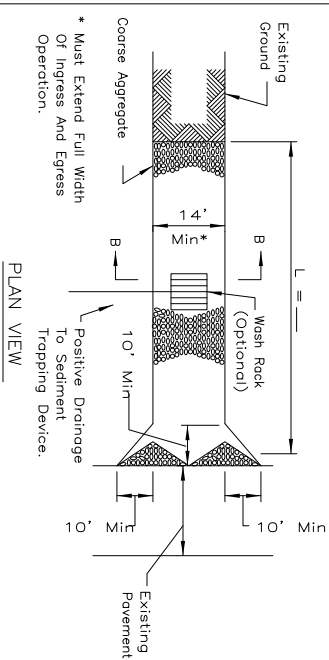


STABILIZED CONSTRUCTION ENTRANCE PLAN

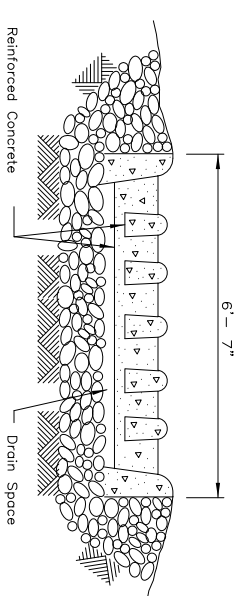

NOTES:  
 1 Filter fabric shall meet the requirements of material specification 592 GEOTEXTILE, Table 1 or 2, Class . 1 dr. 1/4d shall be placed over the cleared area prior to the placing of rock.  
 2 Rock or reclaimed concrete shall meet one of the following IDOT coarse aggregate gradation, CA-1, CA-2, CA-3 or CA-4 and be placed according to construction specification 25 ROCKFILL using placement Method 1 and Class III compaction.  
 3 Any drainage facilities required because of washing shall be constructed according to manufacturers specifications.  
 4 If wash rocks are used they shall be installed according to the manufacturer's specifications.



STABILIZED CONSTRUCTION ENTRANCE PLAN

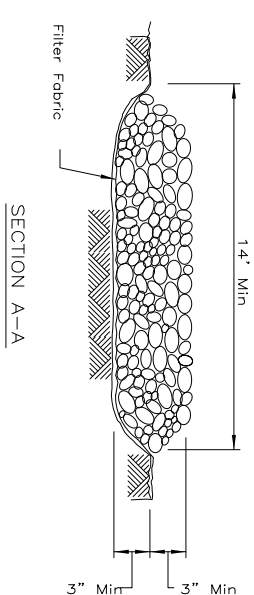

REFERENCE  
 Project \_\_\_\_\_ Date \_\_\_\_\_  
 Designed \_\_\_\_\_ Date \_\_\_\_\_  
 Checked \_\_\_\_\_ Date \_\_\_\_\_  
 Approved \_\_\_\_\_ Date \_\_\_\_\_


REFERENCE  
 Project \_\_\_\_\_ Date \_\_\_\_\_  
 Designed \_\_\_\_\_ Date \_\_\_\_\_  
 Checked \_\_\_\_\_ Date \_\_\_\_\_  
 Approved \_\_\_\_\_ Date \_\_\_\_\_

SILT FENCE WITH WIRE SUPPORT PLAN

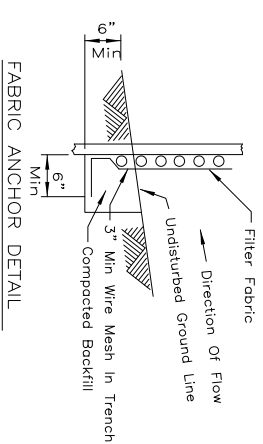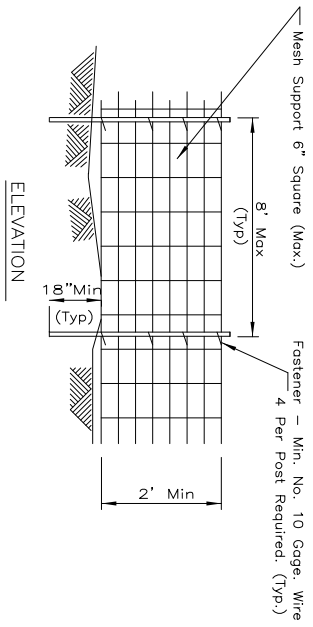

NOTES:  
 1 Wires of mesh support shall be min. gage no. 12.  
 2 Temporary sediment fence shall be installed prior to any grading work in the area to be protected. They shall be maintained throughout the construction period and removed in conjunction with the final grading and site stabilization.  
 3 Filter fabric shall meet the requirements of material specification 592 Geotextile Table 1 or 2, Class with equivalent opening size of at least 30 for nonwoven and 50 for woven.  
 4 Fence posts shall be either standard steel post or wood post with a minimum cross-sectional area of 3.0 sq. in.

SILT FENCE

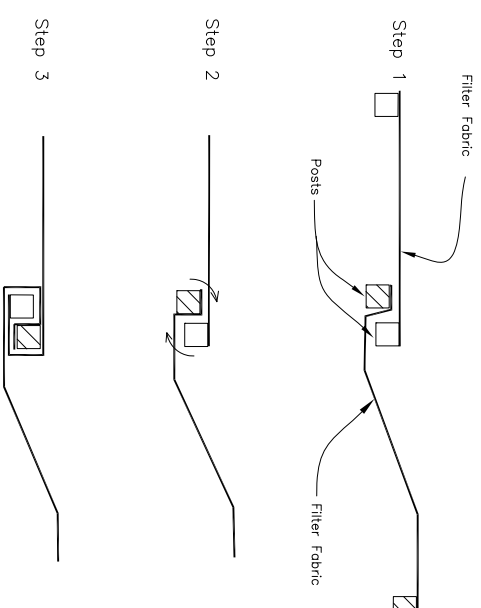

NOTES:  
 1 Place the end post of the second fence inside the end post of the first fence.  
 2 Rotate both posts at least 180 degrees in a clockwise direction to create a tight seal with the fabric material.  
 3 Drive both posts a minimum of 18 inches into the ground and bury the flip.

REFERENCE  
 Project \_\_\_\_\_ Date \_\_\_\_\_  
 Designed \_\_\_\_\_ Date \_\_\_\_\_  
 Checked \_\_\_\_\_ Date \_\_\_\_\_  
 Approved \_\_\_\_\_ Date \_\_\_\_\_

REFERENCE  
 Project \_\_\_\_\_ Date \_\_\_\_\_  
 Designed \_\_\_\_\_ Date \_\_\_\_\_  
 Checked \_\_\_\_\_ Date \_\_\_\_\_  
 Approved \_\_\_\_\_ Date \_\_\_\_\_

PATH: K:\0329702\Drawn\Sheets\  
 FILE: drnd11.dwg  
 UPDATE BY: jwise  
 SURFLET BOOK #  
 XREF DWG:  
 DATE: Sun 3/28/04 9:02am

REVISIONS		
NUMBER	BY	DATE

0 1 2  
 THIS BAR IS EQUAL TO 2"  
 AT FULL SCALE (3/4X22).

CHICAGO EXECUTIVE AIRPORT  
 WHEELING/PROSPECT HEIGHTS, ILLINOIS  
 CONSTRUCT PARTIAL PARALLEL TAXIWAY ECHO AND  
 PARTIAL OVERLAY OF TAXIWAY ECHO

STORM WATER POLLUTION  
 PREVENTION PLAN (SWPPP)  
 DETAILS

© Copyright CMT, Inc.

CRAWFORD, MURPHY & TILLY, INC.  
 CONSULTING ENGINEERS  
 License No. 184-000613

DESIGN BY:	MLW
DRAWN BY:	MLW
CHECKED BY:	MLK
APPROVED BY:	DLP
DATE:	04/22/11
JOB No.:	08290-08
ILLINOIS PROJECT: PWK-3244	
A.I.P. PROJECT: 3-17-0018-B32	
SHEET 8 OF 49 SHEETS	