

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION


FAI RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	D9 PATCH 2022-9	ALEXANDER/PULASKI	13	1
ILLINOIS CONTRACT NO. 78954				

FOR INDEX OF SHEETS, SEE SHEET NO. 3
FOR SUMMARY OF QUANTITIES, SEE SHEET NO. 4-5


PROPOSED
HIGHWAY PLANS

FAI ROUTE 57 (I-57)
D9 PATCH 2022-9
PAVEMENT PATCHING
ALEXANDER/PULASKI COUNTIES

C-99-066-22

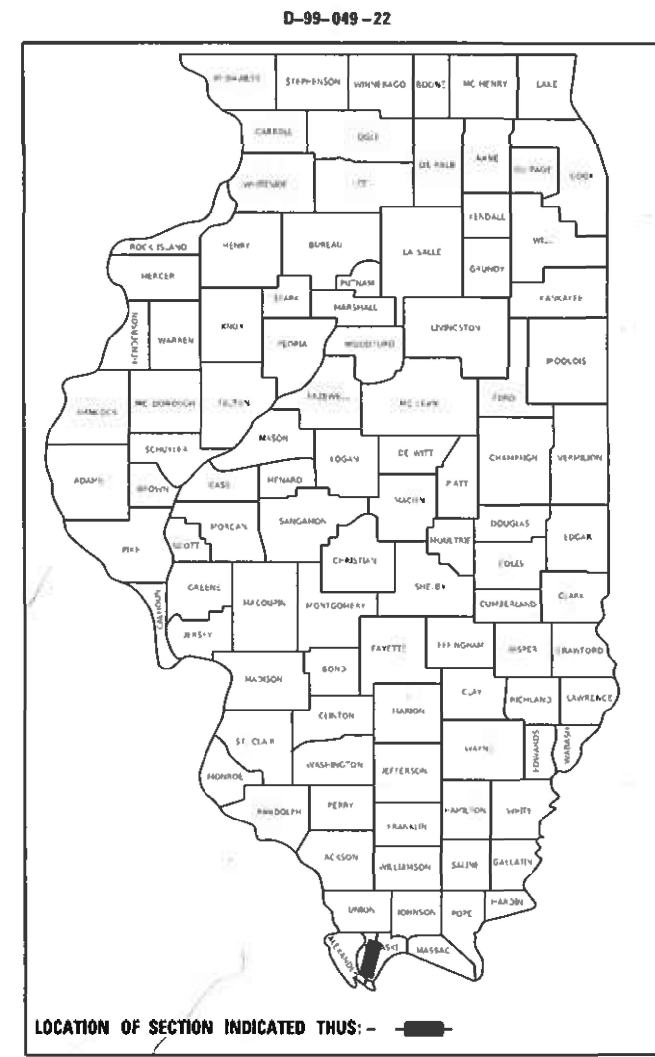

TOWNSHIPS
CAIRO
ULLIN

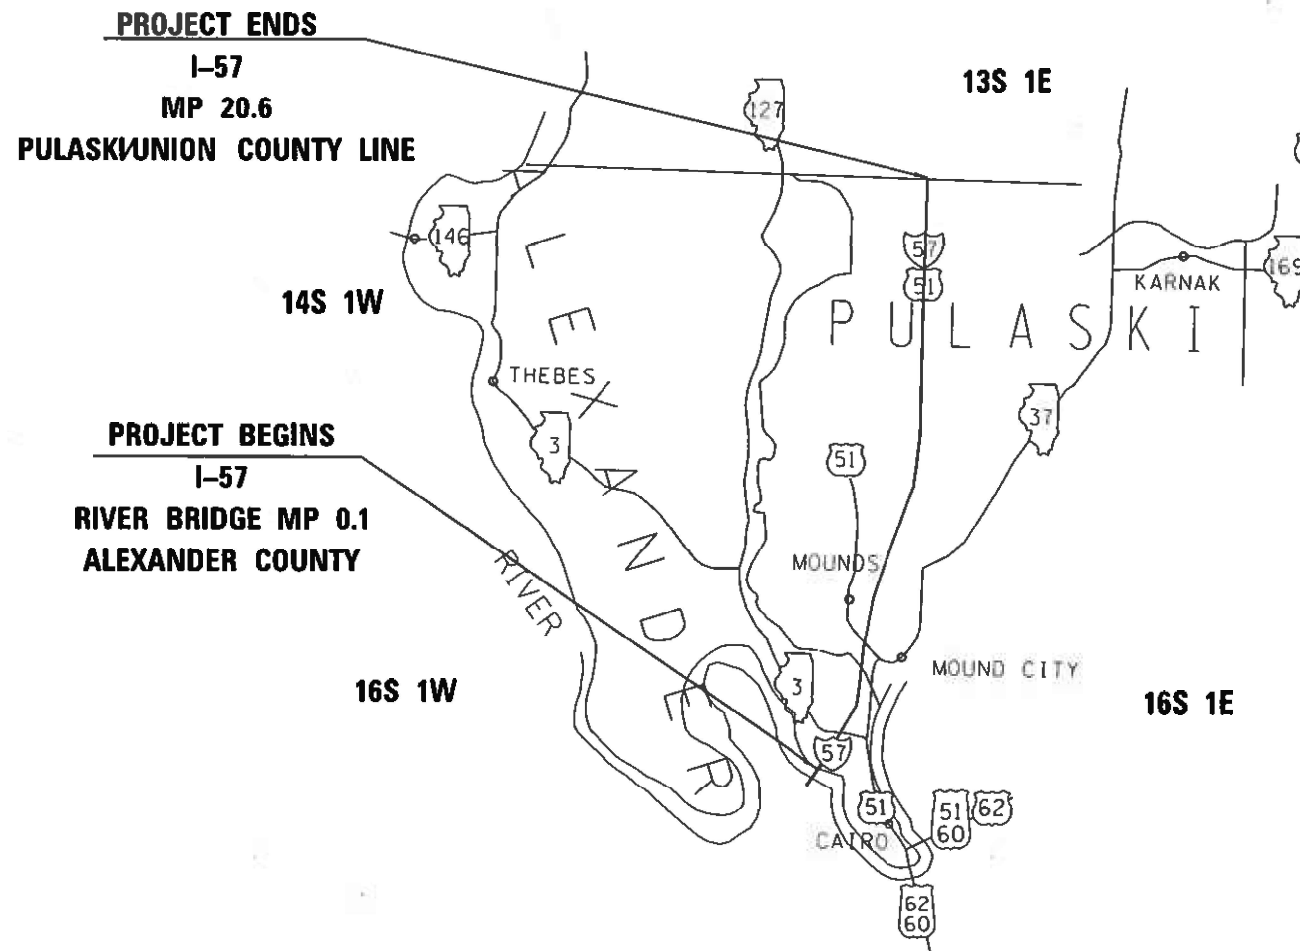

DESIGN DESIGNATION : N/A
COORDINATE SYSTEM : N/A
POSTED SPEED : 70 MPH

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

PROJECT ENGINEER VALERIE ROLLA
PROJECT DESIGNER CLAYTON HOUGHLAND

CONTRACT NO. 78954

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED March 11 2022
Stephen M. Navia
REGION FIVE ENGINEER

May 13, 2022 [Signature]
ENGINEER OF DESIGN AND ENVIRONMENT

May 13, 2022 [Signature]
DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

MDPI: D:\work\1118\1118.dwg
FILE NAME: 1118.dwg
C:\Users\paul\Documents\DWG\DWG2000\1118.dwg
PLOT DATE: 2/23/2022
PLOT SCALE: 100.0000
USER NAME: paul

Prepared By: Charles Stein
DISTRICT STUDIES & PLANS ENGINEER

Examined By: Nancy Lee
DISTRICT LAND ACQUISITION ENGINEER

Examined By: Carrie Puls
DISTRICT PROGRAM DEVELOPMENT ENGINEER

Examined By: [Signature]
DISTRICT OPERATIONS ENGINEER

Examined By: Douglas Reubel
DISTRICT PROJECT IMPLEMENTATION ENGINEER

Examined By: Douglas Reubel
DISTRICT CONSTRUCTION ENGINEER

Examined By: [Signature]
DISTRICT MATERIALS ENGINEER

USER NAME = paul	DESIGNED -	REVISED -
DRAWN -	REVISED -	
CHECKED -	REVISED -	
DATE -	REVISED -	

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SIGNATURE SHEET

SCALE SHEET OF SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	D9 PATCH 2022-9		13	2
CONTRACT NO. 78954				
ILLINOIS FED. AID PROJECT				

INDEX OF SHEETS

SHEET NO	DESCRIPTION
1	COVER SHEET
2	SIGNATURE SHEET
3	INDEX OF SHEETS, HIGHWAY STANDARDS, GENERAL NOTES
4-5	SUMMARY OF QUANTITIES
6-7	ALEXANDER COUNTY PATCHING SCHEDULES
8-13	PULASKI COUNTY PATCHING SCHEDULES

STANDARDS LIST

000001-08	standardsymbolsabbreviations&patterns
001001-02	areasofreinfrebars
001006-04	decimalofinch&foot
442001-04	ClassApatches
442101-09	ClassBPatches
701400-11	ApprchToLnClosure-FrwayExpway
701401-13	LnClosureFrwayExpway
701411-09	LnClosureMultiLn-EntrOrExitRamp45MPHOrMore
701428-01	TrafficControlSetupRemovalFreewayExpressway
701456-05	PartialExitRampClosureFreewayExpressway
701901-08	TrafCntrlDevices
420001-10	Pavement Joints
420701-03	Pavement Welded Wire Reinforcement

GENERAL NOTES

COMMITMENTS: NONE

REV. - MS

MODEL: Default
 FILE: M:\a1c\p1\illsc\paw\benley.com\PROJECTS\Documents\DOT_Offices\District_9\Project\78954\CADD\data\Design\09-78954-SHEETS.dgn

USER NAME = colemm	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	INDEX OF SHEETS, HIGHWAY STANDARDS, GENERAL NOTES			F.A.I. RTE:	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
PLOT SCALE = 100.0000' / in.	DRAWN -	REVISED -					57	D9 PATCH 2022-9	-	13	3
PLOT DATE = 3/24/2022	CHECKED -	REVISED -		SCALE: SHEET OF SHEETS STA. TO STA.			CONTRACT NO. 78954				
	DATE -	REVISED -		ILLINOIS FED. AID PROJECT			*ALEXANDER/PULASKI				

SUMMARY OF QUANTITIES

COUNTY:	ALEXANDER CO	PULASKI CO
ROUTE:	FAI 57	FAI 57
FUNDING:	100% STATE	100% STATE
LOCATION:	RURAL	RURAL
	ROADWAY	ROADWAY
	0005	0005

CODE NUMBER	ITEM DESCRIPTION	UNIT	TOTAL QUANTITY	ROADWAY 0005	ROADWAY 0005
4200060	WELDED WIRE REINFORCEMENT	SQ YD	340	0	340
44200573	CLASS A PATCHES, TYPE I, 12 INCH	SQ YD	16	16	0
44200577	CLASS A PATCHES, TYPE II, 12 INCH	SQ YD	89	89	0
44200581	CLASS A PATCHES, TYPE III, 12 INCH	SQ YD	20	20	0
44200583	CLASS A PATCHES, TYPE IV, 12 INCH	SQ YD	228	228	0
44200616	CLASS A PATCHES, TYPE I, 14 INCH	SQ YD	32	0	32
44200620	CLASS A PATCHES, TYPE II, 14 INCH	SQ YD	368	0	368
44200624	CLASS A PATCHES, TYPE III, 14 INCH	SQ YD	120	0	120
44200628	CLASS A PATCHES, TYPE IV, 14 INCH	SQ YD	284	0	284
44201019	CLASS B PATCHES, TYPE II, 14 INCH	SQ YD	178	0	178
44201023	CLASS B PATCHES, TYPE III, 14 INCH	SQ YD	91	0	91
44201025	CLASS B PATCHES, TYPE IV, 14 INCH	SQ YD	249	0	249
44201299	DOWEL BARS 1 1/2"	EACH	656	0	656
44213000	PATCHING REINFORCEMENT	SQ YD	1,155	351	804

MODEL: Default
 FILE: M:\GIS\Projects\78954\CADD\Drawings\DOT_Offices\District_9\Project\78954\CADD\Drawings\DOT_78954-SHEETS.dgn

REV. - MS

USER NAME = colemm PLOT SCALE = 100.0000' / in. PLOT DATE = 3/24/2022	DESIGNED - DRAWN - CHECKED - DATE -	REVISED - REVISED - REVISED + REVISED +	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SUMMARY OF QUANTITIES	F.A.I. RTE. 57 SECTION D9 PATCH 2022-9 COUNTY - TOTAL SHEETS 13 SHEET NO. 4 CONTRACT NO. 78954 ILLINOIS FED. AID PROJECT
			SCALE:	SHEET 1 OF 2 SHEETS	STA. TO STA.

*ALEXANDER/PULASKI

SUMMARY OF QUANTITIES - CONT

CODE NUMBER	ITEM DESCRIPTION	UNIT	TOTAL QUANTITY	COUNTY:	ALEXANDER CO	PULASKI CO
				ROUTE:	FAI 57	FAI 57
				FUNDING:	100% STATE	100% STATE
				LOCATION:	RURAL	RURAL
					ROADWAY	ROADWAY
					0005	0005
44213200	SAW CUTS	FOOT	7,980		1,612	6,368
44213204	TIE BARS 3/4"	EACH	377		100	277
67100100	MOBILIZATION	L SUM	1		0.25	0.75
70100205	TRAFFIC CONTROL AND PROTECTION, STANDARD 701401	EACH	1		0.25	0.75
70100420	TRAFFIC CONTROL AND PROTECTION, STANDARD 701411	EACH	10		2	8
70100825	TRAFFIC CONTROL AND PROTECTION, STANDARD 701456	L SUM	1		0.25	0.75
70107025	CHANGEABLE MESSAGE SIGN	CAL DA	112		42	70

MODEL: Default
 FILE: M:\GIS\Projects\78954\CADD\Drawings\DOT_Offices\District_9\Project\78954\CADD\Drawings\DOT_78954-SHEETS.dgn

REV. - MS

USER NAME = colemm PLOT SCALE = 100.0000' / in. PLOT DATE = 3/24/2022	DESIGNED - DRAWN - CHECKED - DATE -	REVISED - REVISED - REVISED - REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SUMMARY OF QUANTITIES	SCALE:	SHEET OF SHEETS STA. TO STA.	F.A.I. RTE: 57 SECTION: D9 PATCH 2022-9 COUNTY: - TOTAL SHEETS: 13 SHEET NO.: 5 CONTRACT NO. 78954 ILLINOIS FED. AID PROJECT
---	--	--	---	------------------------------	--------	------------------------------	--

*ALEXANDER/PULASKI

I - 57 NORTHBOUND DRIVING LANE - ALEXANDER COUNTY										
MILE POST	WIDTH	LENGTH	AREA	CLASS A PATCHES, TY I, 12"	CLASS A PATCHES, TY II, 12"	CLASS A PATCHES, TY III, 12"	CLASS A PATCHES, TY IV, 12"	TIE BARS 3/4"	PATCHING REINFORCEMENT	SAW CUTS
FOR INFORMATION ONLY										
	(FOOT)	(FOOT)	(SQ YD)	(SQ YD)	(SQ YD)	(SQ YD)	(SQ YD)	(EACH)	(SQ YD)	(FOOT)
River Bridge										
0.1	12	4	5.33		5.33				5.33	56
0.1	12	4	5.33		5.33				5.33	56
Bridge										
1.1	6	30	20.00			20		15	20.00	84
1.4	6	6	4.00	4					4.00	36
1.8	6	6	4.00	4					4.00	36
RxR	12	30	40.00				40	15	40.00	108
RxR	12	30	40.00				40	15	40.00	108
2.1	12	40	53.33				53.33	20	53.33	128
ALEXANDER COUNTY NB DRIVING LANE TOTAL				8	11	20	134	65	172	612

I - 57 NORTHBOUND PASSING LANE - ALEXANDER COUNTY										
MILE POST	WIDTH	LENGTH	AREA	CLASS A PATCHES, TY I, 12"	CLASS A PATCHES, TY II, 12"	CLASS A PATCHES, TY III, 12"	CLASS A PATCHES, TY IV, 12"	TIE BARS 3/4"	PATCHING REINFORCEMENT	SAW CUTS
FOR INFORMATION ONLY										
	(FOOT)	(FOOT)	(SQ YD)	(SQ YD)	(SQ YD)	(SQ YD)	(SQ YD)	(EACH)	(SQ YD)	(FOOT)
River Bridge										
0.1	12	4	5.33		5.33				5.33	56
0.1	12	4	5.33		5.33				5.33	56
Bridge										
1.0										
ALEXANDER COUNTY NB PASSING LANE TOTAL				0	11	0	0	0	11	112
ALEXANDER COUNTY NB DRIVING LANE TOTAL				8	11	20	134	65	172	612
ALEXANDER COUNTY NB TOTAL				8	22	20	134	65	183	724

MODEL: Default
 FILE: M:\MIS_Plan\Subsect-pw-beadefy.com\PIV\DOT\Documents\DOT Office\Dir\rdet_8\Project\78954\CADD\Draw\Design\09-78954-SHEETS.dgn

USER NAME = cdelem	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100,0000' / in.	CHECKED -	REVISED -
PLOT DATE = 3/24/2022	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

ALEXANDER COUNTY NORTHBOUND PATCHING SCHEDULE

SCALE: SHEET OF SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	D9 PATCH 2022-9	*	13	6
CONTRACT NO. 78954			ILLINOIS FED. AID PROJECT	

I-57 SOUTHBOUND DRIVING LANE - ALEXANDER COUNTY										
MILE POST	WIDTH	LENGTH	AREA	CLASS A PATCHES, TY I, 12"	CLASS A PATCHES, TY II, 12"	CLASS A PATCHES, TY III, 12"	CLASS A PATCHES, TY IV, 12"	TIE BARS 3/4"	PATCHING REINFORCEMENT	SAW CUTS
FOR INFORMATION ONLY										
	(FOOT)	(FOOT)	(SQ YD)	(SQ YD)	(SQ YD)	(SQ YD)	(SQ YD)	(EACH)	(SQ YD)	(FOOT)
3.7	12	4	5.33		5.33				5.33	56
3.4	12	4	5.33		5.33				5.33	56
3.1	12	4	5.33		5.33				5.33	56
RxR	12	70	93.33				93.33	35	93.33	188
2.7	12	4	5.33		5.33				5.33	56
2.5	12	10	13.33		13.33				13.33	68
2.5	6	6	4.00	4					4.00	36
1.6	12	4	5.33		5.33				5.33	56
1.0	12	4	5.33		5.33				5.33	56
0.8	6	6	4.00	4					4.00	36
River Bridge	12	4	5.33		5.33				5.33	56
ALEXANDER COUNTY SB DRIVING LANE TOTAL				8	51	0	94	35	152	720

I-57 SOUTHBOUND PASSING LANE - ALEXANDER COUNTY										
MILE POST	WIDTH	LENGTH	AREA	CLASS A PATCHES, TY I, 12"	CLASS A PATCHES, TY II, 12"	CLASS A PATCHES, TY III, 12"	CLASS A PATCHES, TY IV, 12"	TIE BARS 3/4"	PATCHING REINFORCEMENT	SAW CUTS
FOR INFORMATION ONLY										
	(FOOT)	(FOOT)	(SQ YD)	(SQ YD)	(SQ YD)	(SQ YD)	(SQ YD)	(EACH)	(SQ YD)	(FOOT)
4.0	12	4	5.33		5.33				5.33	56
0.5	12	4	5.33		5.33				5.33	56
River Bridge	12	4	5.33		5.33				5.33	56
ALEXANDER COUNTY SB PASSING LANE TOTALS				0	16	0	0	0	16	168
ALEXANDER COUNTY SB DRIVING LANE TOTALS				8	51	0	94	35	152	720
ALEXANDER COUNTY SB TOTALS				8	67	0	94	35	168	888

MODEL: Default
 FILE: M:\MIS_Plan\Subsect-pw-bead-fwy.com\PIV\DOT\Documents\DOT_Offices\Dir\drct_0\Project\78954\CADD\Drawn\Design\09-78954-SHEETS.dgn

USER NAME = colerm	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100,0000' / in.	CHECKED -	REVISED -
PLOT DATE = 3/24/2022	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

ALEXANDER COUNTY SOUTHBOUND PATCHING SCHEDULE

SCALE: SHEET OF SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	D9 PATCH 2022-9	*	13	7
CONTRACT NO. 78954			ILLINOIS FED. AID PROJECT	

I-57 NORTHBOUND DRIVING LANE - PULASKI COUNTY										
MILE POST	WIDTH	LENGTH	AREA	CLASS A PATCHES, TY I, 14"	CLASS A PATCHES, TY II, 14"	CLASS A PATCHES, TY III, 14"	CLASS A PATCHES, TY IV, 14"	TIE BARS 3/4"	PATCHING REINFORCEMENT	SAW CUTS
FOR INFORMATION ONLY										
	(FOOT)	(FOOT)	(SQ YD)	(SQ YD)	(SQ YD)	(SQ YD)	(SQ YD)	(EACH)	(SQ YD)	(FOOT)
7.4	6	6	4.00	4					4.00	36
8.2	6	10	6.67		6.67				6.67	44
8.7	6	20	13.33		13.33				13.33	64
9.0	12	4	5.33		5.33				5.33	56
13.0	12	4	5.33		5.33				5.33	56
13.1	12	60	80.00				80	30	80.00	168
13.1	12	4	5.33		5.33				5.33	56
14.8	12	4	5.33		5.33				5.33	56
15.5	6	10	6.67		6.67				6.67	44
17.1	6	6	4.00	4					4.00	36
17.6	12	4	5.33		5.33				5.33	56
	12	30	40.00				40	15	40.00	108
	12	8	10.67		10.67				10.67	64
18.0	12	4	5.33		5.33				5.33	56
	12	4	5.33		5.33				5.33	56
PULASKI COUNTY NB DRIVING LANE SUB TOTAL 1				8	75	0	120	45	203	956

MODEL: Default
 FILE NAME: pulaski-pw-benefits.com\FW\DOT\Documents\DOT Office\Director @Project\78954\CADD\Drawings\78954-SHEETS.dgn

USER NAME = collem	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100,0000' / in.	CHECKED -	REVISED -
PLOT DATE = 3/24/2022	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PULASKI COUNTY NORTHBOUND PATCHING SCHEDULE

SCALE: SHEET OF SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	D9 PATCH 2022-9		13	8
CONTRACT NO. 78954			ILLINOIS FED. AID PROJECT	

ALEXANDER/PULASKI

I -57 NORTHBOUND DRIVING LANE - PULASKI COUNTY										
MILE POST	WIDTH	LENGTH	AREA	CLASS A PATCHES, TY I, 14"	CLASS A PATCHES, TY II, 14"	CLASS A PATCHES, TY III, 14"	CLASS A PATCHES, TY IV, 14"	TIE BARS 3/4"	PATCHING REINFORCEMENT	SAW CUTS
	FOR INFORMATION ONLY									
	(FOOT)	(FOOT)	(SQ YD)	(SQ YD)	(SQ YD)	(SQ YD)	(SQ YD)	(EACH)	(SQ YD)	(FOOT)
Bridge										
18.3	12	4	5.33		5.33				5.33	56
18.7	12	4	5.33		5.33				5.33	56
Bridge										
18.8	12	4	5.33		5.33				5.33	56
19.0	12	8	10.67		10.67				10.67	64
19.1	12	4	5.33		5.33				5.33	56
19.2	12	6	8.00		8.				8.00	60
19.2	12	4	5.33		5.33				5.33	56
19.3	12	8	10.67		10.67				10.67	64
20.2	12	4	5.33		5.33				5.33	56
	12	8	10.67		10.67				10.67	64
20.4	12	4	5.33		5.33				5.33	44
Bridge										
	12	4	5.33		5.33				5.33	44
20.4	12	4	5.33		5.33				5.33	44
20.6	12	8	10.67		10.67				10.67	52
20.6	12	4	5.33		5.33				5.33	44
PULASKI COUNTY NB DRIVING LANE SUB-TOTAL 2				0	104	0	0	0	104	816
PULASKI COUNTY NB DRIVING LANE SUB-TOTAL 1				8	75	0	120	45	203	956
PULASKI COUNTY NB DRIVING LANE TOTAL				8	179	0	120	45	307	1772

MODEL: Default
 FILE NAME: pulaski-pw-benefits.com\FW\DOT\Documents\DOT Office\Director @Project\78954\CADD\Drawings\78954-SHEETS.dgn

USER NAME = collem	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100,0000' / in.	CHECKED -	REVISED -
PLOT DATE = 3/24/2022	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PULASKI COUNTY NORTHBOUND PATCHING SCHEDULE

SCALE: SHEET OF SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	D9 PATCH 2022-9		13	9
CONTRACT NO. 78954			ILLINOIS FED. AID PROJECT	

I - 57 NORTHBOUND PASSING LANE - PULASKI COUNTY										
MILE POST	WIDTH	LENGTH	AREA	CLASS A PATCHES, TY I, 14"	CLASS A PATCHES, TY II, 14"	CLASS A PATCHES, TY III, 14"	CLASS A PATCHES, TY IV, 14"	TIE BARS 3/4"	PATCHING REINFORCEMENT	SAW CUTS
	FOR INFORMATION ONLY									
	(FOOT)	(FOOT)	(SQ YD)	(SQ YD)	(SQ YD)	(SQ YD)	(SQ YD)	(EACH)	(SQ YD)	(FOOT)
7.1	6	20	13.33		13.33				13.33	64
8.7	6	30	20.00			20		15	20.00	84
8.7	6	55	36.67				36.67	28	36.67	134
9.0	12	4	5.33		5.33				5.33	56
14.8	12	4	5.33		5.33				5.33	56
17.6	6	30	20.00			20		15	20.00	84
18.0	12	4	5.33		5.33				5.33	56
Bridge										
18.3	12	4	5.33		5.33				5.33	56
Bridge										
18.8	12	4	5.33		5.33				5.33	56
20.2	12	4	5.33		5.33				5.33	56
	12	8	10.67		10.67				10.67	64
20.4	12	4	5.33		5.33				5.33	56
Bridge										
20.6	12	4	5.33		5.33				5.33	56
PULASKI COUNTY NB PASSING LANE TOTAL				0	67	40	37	58	144	878
PULASKI COUNTY NB DRIVING LANE TOTAL				8	179	0	120	45	307	1772
PULASKI COUNTY NB TOTAL				8	246	40	157	103	451	2650

MODEL: Default
 FILE NAME: pulaski-pw-bentley.com/PW/IDOT/Documents/IDOT_Offices/Dir/det_0/Project/78954/CADD/Draw/Design/09-78954-SHEETS.dgn

USER NAME = colerm	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100,0000' / in.	CHECKED -	REVISED -
PLOT DATE = 3/24/2022	DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

PULASKI COUNTY NORTHBOUND PATCHING SCHEDULE

SCALE: SHEET OF SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	D9 PATCH 2022-9	*	13	10
CONTRACT NO. 78954			ILLINOIS FED. AID PROJECT	

I-57 SOUTHBOUND DRIVING LANE - PULASKI COUNTY

MILE POST	WIDTH	LENGTH	AREA	CLASS A PATCHES, TY I, 14"	CLASS A PATCHES, TY II, 14"	CLASS A PATCHES, TY III, 14"	CLASS A PATCHES, TY IV, 14"	TIE BARS 3/4"	PATCHING REINFORCEMENT	SAW CUTS
	(FOOT)	(FOOT)	(SQ YD)	(SQ YD)	(SQ YD)	(SQ YD)	(SQ YD)	(EACH)	(SQ YD)	(FOOT)
21.0	12	10	13.33		13.33				13.33	68
	12	20	26.67				26.67		26.67	88
19.9	12	4	5.33		5.33				5.33	56
18.8	12	4	5.33		5.33				5.33	56
18.6	12	4	5.33		5.33				5.33	56
18.3	12	4	5.33		5.33				5.33	56
	6	6	4.00	4					4.00	36
17.8	12	15	20.00			20			20.00	78
17.7	6	6	4.00	4					4.00	36
13.2	12	4	5.33		5.33				5.33	56
10.4	6	10	6.67		6.67				6.67	44
9.0	12	4	5.33		5.33				5.33	56
8.7	6	6	4.00	4					4.00	36
	12	55	73.33				73.33	28	73.33	158
7.6	6	6	4.00	4					4.00	36
7.5	12	4	5.33		5.33				5.33	56
7.3	6	6	4.00	4					4.00	36
7.1	12	4	5.33		5.33				5.33	56
7.1	6	8	5.33		5.33				5.33	40
7.0	6	40	26.67				26.67	20	26.67	104
6.9	6	15	10.00		10				10.00	54
6.7	6	6	4.00	4					4.00	36
6.6	6	30	20.00			20		15	20.00	84
5.8	6	30	20.00			20		15	20.00	84
5.8	6	30	20.00			20		15	20.00	84
PULASKI COUNTY SB DRIVING LANE TOTAL				24	78	80	127	93	309	1550

MODEL: Default
 FILE: \\malfp-pw-bufile.com\P\DOT\Documents\DOT Office\Director @Project\78954\CADD\Drawings\Drawings\78954-SHEETS.dgn

USER NAME = collem	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100,0000' / in.	CHECKED -	REVISED -
PLOT DATE = 3/24/2022	DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

PULASKI COUNTY SOUTHBOUND PATCHING SCHEDULE

SCALE: SHEET OF SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	D9 PATCH 2022-9	*	13	11
CONTRACT NO. 78954				
ILLINOIS		FED. AID PROJECT		

I-57 SOUTHBOUND PASSING LANE - PULASKI COUNTY										
MILE POST	WIDTH	LENGTH	AREA	CLASS A PATCHES, TY I, 14"	CLASS A PATCHES, TY II, 14"	CLASS A PATCHES, TY III, 14"	CLASS A PATCHES, TY IV, 14"	TIE BARS 3/4"	PATCHING REINFORCEMENT	SAW CUTS
	FOR INFORMATION ONLY									
	(FOOT)	(FOOT)	(SQ YD)	(SQ YD)	(SQ YD)	(SQ YD)	(SQ YD)	(EACH)	(SQ YD)	(FOOT)
21.0										
	12	4	5.33		5.33				5.33	56
20.0	12	4	5.33		5.33				5.33	56
19.5	12	4	5.33		5.33				5.33	56
18.3	12	4	5.33		5.33				5.33	56
17.8	12	4	5.33		5.33				5.33	56
16.2	12	4	5.33		5.33				5.33	56
10.4	6	10	6.67		6.67				6.67	44
9.0	12	4	5.33		5.33				5.33	56
PULASKI COUNTY SB PASSING LANE TOTAL				0	44	0	0	0	44	436
PULASKI COUNTY SB DRIVING LANE TOTAL				24	78	80	127	93	309	1550
PULASKI COUNTY SB TOTAL				24	122	80	127	93	353	1986

MODEL: Default
 FILE: \\mfrs-pw-bentley.com\PW\DOT\Documents\DOT Office\Dir\rdet_@Project\78954\CADD\Drawn\Design\09-78954-SHEETS.dgn

USER NAME = colerm	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100,0000' / in.	CHECKED -	REVISED -
PLOT DATE = 3/24/2022	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PULASKI COUNTY SOUTHBOUND PATCHING SCHEDULE

SCALE: SHEET OF SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	D9 PATCH 2022-9	*	13	12
CONTRACT NO. 78954			ILLINOIS FED. AID PROJECT	

*ALEXANDER/PULASKI

INTERCHANGE RAMPS AT SHAWNEE COLLEGE ROAD (EXIT 18) - PULASKI COUNTY

MILE POST	WIDTH	LENGTH	AREA	CLASS B PATCHES, TY I, 14"	CLASS B PATCHES, TY II, 14"	CLASS B PATCHES, TY III, 14"	CLASS B PATCHES, TY IV, 14"	TIE BARS 3/4"	WELDED WIRE REINFORCEMENT	DOWEL BARS 1 1/2"	SAW CUTS
	(FOOT)	(FOOT)	(SQ YD)	(SQ YD)	(SQ YD)	(SQ YD)	(SQ YD)	(EACH)	(SQ YD)	(EACH)	(FOOT)
NB Exit											0
	16	8	14.22		14.22					28	64
	16	10	17.78			17.78			17.78	28	68
	16	6	10.67		10.67					28	60
	16	8	14.22		14.22					28	64
	16	10	17.78			17.78			17.78	28	68
NB Entr.											
	16	6	10.67		10.67					28	60
	8	22	19.56			19.56		11	19.56	12	68
	16	40	71.11				71.11	20	71.11	28	128
	16	30	53.33				53.33	15	53.33	28	108
	16	10	17.78			17.78			17.78	28	68
	16	10	17.78			17.78			17.78	28	68
SB Exit											
	16	6	10.67		10.67					28	60
	16	40	71.11				71.11	20	71.11	28	128
	16	6	10.67		10.67					28	60
	16	30	53.33				53.33	15	53.33	28	108
	16	6	10.67		10.67					28	60
SB Entr.											
	16	6	10.67		10.67					28	60
	16	6	10.67		10.67					28	60
	16	6	10.67		10.67					28	60
	16	6	10.67		10.67					28	60
	16	8	14.22		14.22					28	64
	16	6	10.67		10.67					28	60
	16	8	14.22		14.22					28	64
	16	8	14.22		14.22					28	64
PULASKI COUNTY INTERCHANGE RAMPS PATCHING TOTAL				0	178	91	249	81	340	656	1732

MODEL: Default
 FILE: M:\GIS\Pulaski\p101024\Drawings\DOT_Offices\DOT\Projects\78954\CADD\Drawings\DOT\78954-SHEETS.dgn

REV. - MS

USER NAME = colemm	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100.0000' / in.	CHECKED -	REVISED -
PLOT DATE = 3/24/2022	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PULASKI COUNTY INTERCHANGE RAMP PATCHING SCHEDULE
 SCALE: SHEET OF SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	D9 PATCH 2022-9	-	13	13
ILLINOIS FED. AID PROJECT			CONTRACT NO. 78954	

*ALEXANDER/PULASKI