



Illinois Department of Transportation

2300 South Dirksen Parkway / Springfield, Illinois / 62764

June 19, 2012

SUBJECT: FAP Route 600 (IL-159)
Section 60-(30,31,128)DM-10
Madison County
Contract No. 76F34
Item No. 9, June 29, 2012 Letting
Addendum A

NOTICE TO PROSPECTIVE BIDDERS:

Attached is an addendum to the plans or proposal. This addendum involves revised and/or added material.

1. Revised sheet 7 of the Fold-up Plans.
2. Revised page 6 of the Special Provisions.

Prime contractors must utilize the enclosed material when preparing their bid and must include any Schedule of Prices changes in their bidding proposal.

Bidders using computer-generated bids are cautioned to reflect any and all Schedule of Prices changes, if involved, into their computer programs.

Very truly yours,

John D. Baranzelli, P. E.
Acting Engineer of Design and Environment

A handwritten signature in black ink, appearing to read "Ted B. Walschleger P.E.".

By: Ted B. Walschleger, P. E.
Engineer of Project Management

cc: Omer Osman, Region 5, District 8; Mike Renner; Estimates


TBW/DB/III



FINAL GRADE ELEVATION IS 545.10+/-
TO MATCH EXISTING GROUND.

TOTAL SHEETS	SHEET NO.
7	7

CONTRACT NO. 76F34

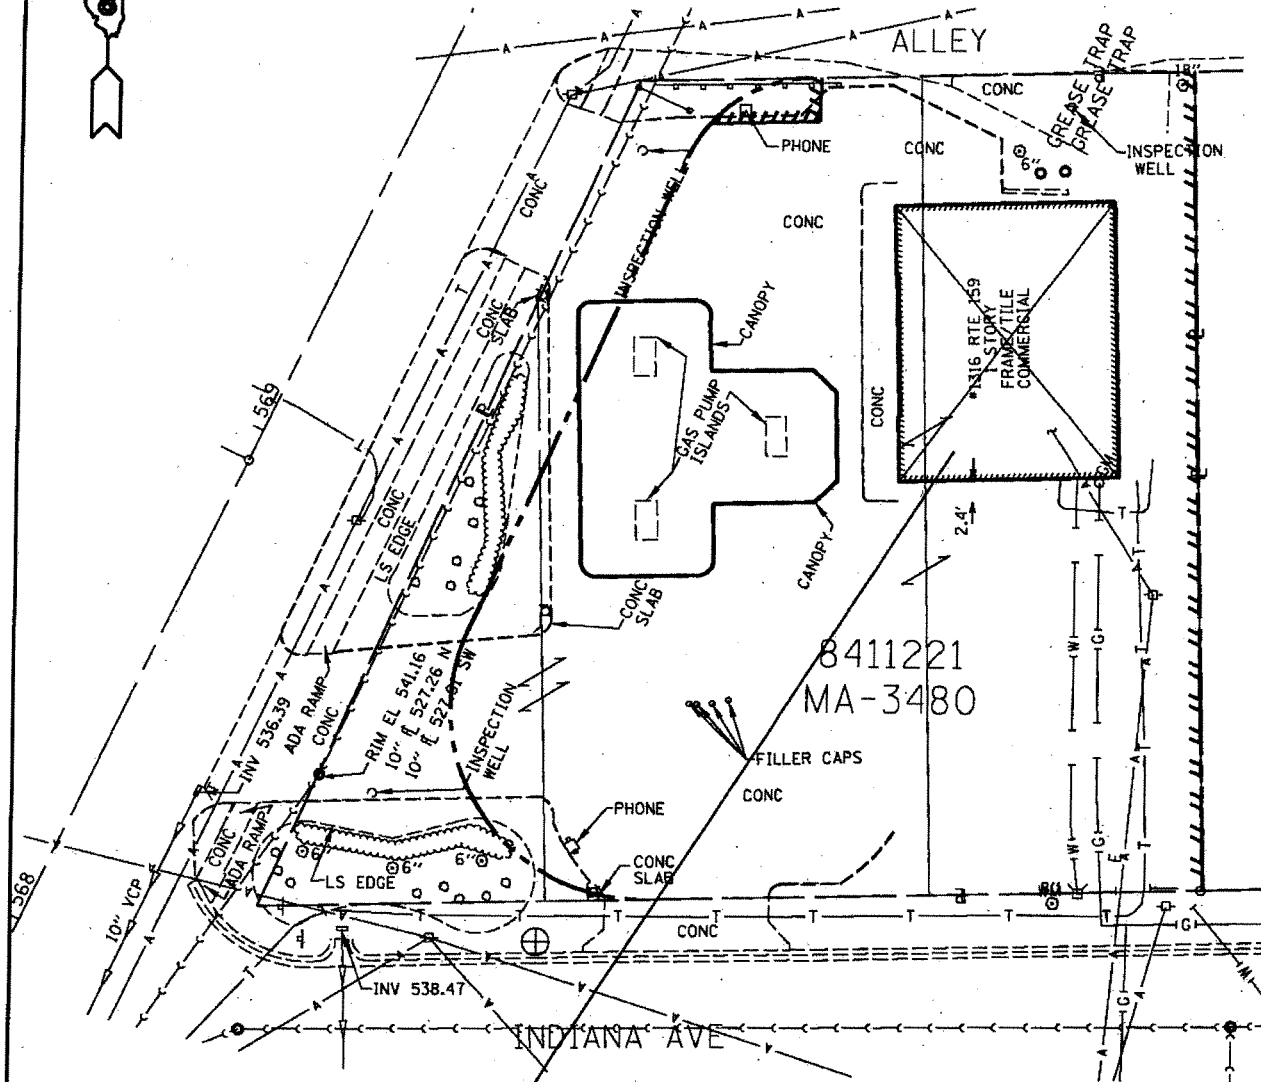

8411221
MA-3480

UNDERGROUND STORAGE TANKS WILL NOT BE REMOVED ON THIS CONTRACT. HOWEVER, WITH REMOVAL OF THE EXISTING PUMPS THE UST'S WILL REQUIRE CAPPING IN A MANNER TO MEET THE APPROVAL OF THE FIRE MARSHALL.

BUILDING NO. 1

PARCEL 8411221
1316 VANDALIA ST.
COLLINSVILLE
FAP 600 (IL 159)
SECTION 60-(30,31,128)DM-10
MADISON COUNTY

REVISIED SHEET 6-19-12

PLOT DATE: 6/19/2012

DATE: 6/19/2012
C:\pwworkspace\pwworkspace\8411221\8411221-12.dwg

KEEPING THE ROADS AND STREETS OPEN TO TRAFFIC

The Contractor shall conduct and coordinate the construction operations for this project in such a manner so as to keep all roads and streets open to two-way traffic at all times except when construction operations require the closure of a lane of traffic and traffic control and protection is installed meeting the approval of the Engineer. No overnight lane closures will be permitted.

AVAILABILITY AND VACANCY OF BUILDINGS

The Contractor is advised that all buildings scheduled for demolition under this contract are vacant and available for immediate demolition. The Contractor shall, however, obtain permission from the Engineer prior to the start of work under this contract.

REMOVAL OF MISCELLANEOUS ITEMS

The Contractor is advised that it is the intent of the provision that each parcel be clear of all real property, chattel, debris and all rubbish such that the property can be site graded, seeded and present a neat and clean appearance on completion of this project.

The Contractor will then be required to remove all driveways, patios, sidewalk, parking lots (i.e. all paved surfaces), miscellaneous sheds, pools, fountains, propane tanks, decks, abandoned cars or trucks, private power poles, **light standards, canopy, air station, pumps**, and other miscellaneous items including debris and rubbish to the satisfaction and approval of the Engineer.

The Contractor is advised to inspect the various parcels involved prior to bidding as no additional compensation will be allowed of these items.

Removal of the items as herein specified and site grading will not be paid for separately, but considered as included in the contract lump sum price bid for BUILDING REMOVAL OF THE NO. SPECIFIED from the various properties involved.

REMOVAL OF MISCELLANEOUS TREES AND SHRUBS

The Contractor is advised that it is the intent of the provision that each parcel be clear of all trees, shrubbery, and landscape items such that the property can be site graded, seeded and present a neat and clean appearance on completion of this project. The Contractor will then be required to remove and dispose of all trees and shrubs.

The Contractor is advised to inspect the various parcels involved prior to bidding, as no additional compensation will be allowed of these items.

Removal and disposal of the items as herein specified and site grading will not be paid for separately, but considered as included in the contract lump sum price bid for BUILDING REMOVAL OF THE NO. SPECIFIED from the various properties involved.