

F.A.P. RTE. SECTION SHEETS NO. 866 4N-1 LAKE 165 10 STA. TO STA. FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT

CONTRACT NO. 60931

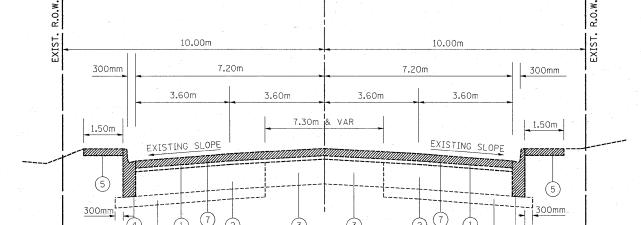

IL RTE 132 (GRAND AVE) EXISTING TYPICAL SECTION

WEST LEG (LOOKING EAST)

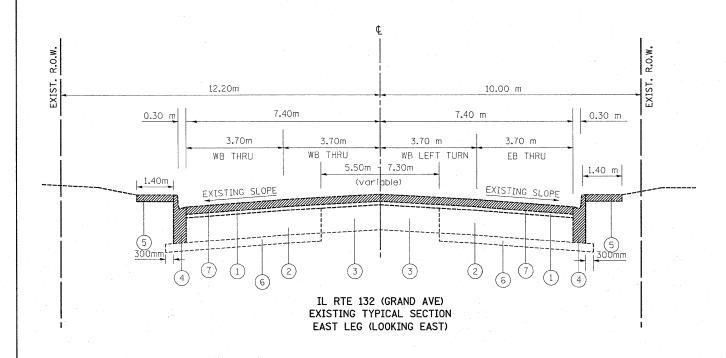

LEGEND

- 1. EXISTING HOT-MIX ASPHALT SURFACING, 114mm
- 2. EXISTING HOT-MIX ASPHALT BASE COURSE, 260mm
- 3. EXISTING PCC BASE COURSE, 260mm
- 4. EXISTING CURB AND GUTTER, TYPE B-15.30
- 5. EXISTING SIDEWALK
- 6. EXISTING AGGREGATE BASE COURSE, TYPE B
- 7. PROPOSED HOT-MIX ASPHALT SURFACE REMOVAL, 50mm
- 8. PROPOSED HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N70, 50mm
- 9. PROPOSED HMA BASE COURSE, 270mm
- 10. PROPOSED AGGREGATE SUBGRADE, 300mm
- 11. PROPOSED COMBINATION CONCRETE CURB AND GUTTER TYPE B-15.60
- 12. PROPOSED PCC SIDEWALK, 125mm
- 13. PROPOSED HOT-MIX ASPHALT SIDEWALK, 150mm

NOTE:

"THE CONTRACTOR SHALL MILL FIRST PRIOR TO PATCHING".

ADDITIONAL SUB-BASE GRANULAR MATERIAL UNDER PROPOSED CURB AND GUTTER SHALL NOT BE PAID FOR SEPARATELY BUT WILL BE CONSIDERED AS INCLUDED IN THE COST PER SQUARE METER OF SUB-BASE GRANULAR MATERIAL, TYPE B, 100mm

ANY SAW CUTTING REQUIRED TO REMOVE AN ITEM ADJACENT TO AN ITEM TO BE SAVE WILL BE CONSIDERED AS PART OF THE REMOVAL ITEM AND WILL NOT BE PAID FOR SEPARATELY.

PLACEMENT OF TIE BARS FOR COMBINATION CONCRETE CURB & GUTTER SHALL NOT BE PAID FOR SEPARATELY BUT WILL BE CONSIDERED AS INCLUDED IN THE COST PER LINEAR METER OF COMBINATION CONCRETE CURB & GUTTER, TYPE B-15.60

DENOTES REMOVAL ITEM SEE PLAN SHEETS FOR EXACT LOCATIONS.

			· · · · · · · · · · · · · · · · · · ·
REVISIONS			
NAME	DATE	ILLINOIS DEPARTM	ENT OF TRANSPORTATION
		IL RTE 83	(MILWAKEE AVE)
		AT IL RTE	132 (GRAND AVE)
		EXISTING TYPICAL SECTION	
		SCALE:	DRAWN BY
		DATE: 3/12/2010	CHECKED BY

*REF-*REF-*REF-

c:\pw_work\PWIDOT\GALBANNB\d0I08064\PI04498-design2.dgn