

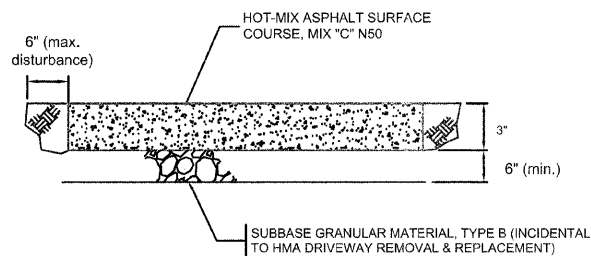
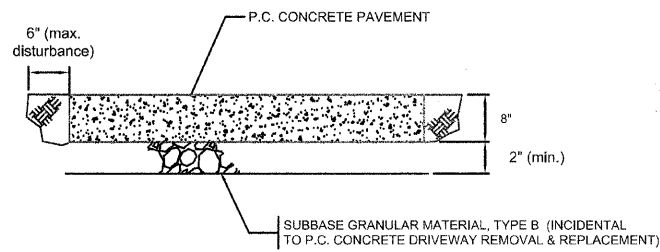


- ① CONTINUOUS REBAR, (2) - #4 - REQ'D FOR ALL CURB OVER 10' LONG
- ② SUBBASE GRANULAR MATERIAL, TYPE B (CRUSHED STONE CA-7) (COST IS INCIDENTAL TO COMB. CURB & GUTTER)
- ③ P.C. CONCRETE BASE COURSE, THE CONTRACTOR SHALL REMOVE ALL DEBRIS AND PAVEMENT FROM THE AREA PRIOR TO PLACEMENT. TEMPORARY PATCH AT DRIVEWAYS AS NEEDED. (COST IS INCIDENTAL TO COMB. CURB & GUTTER)
- ④ EXISTING PAVEMENT, VARIES


COMBINATION CONCRETE CURB AND GUTTER REMOVAL AND REPLACEMENT

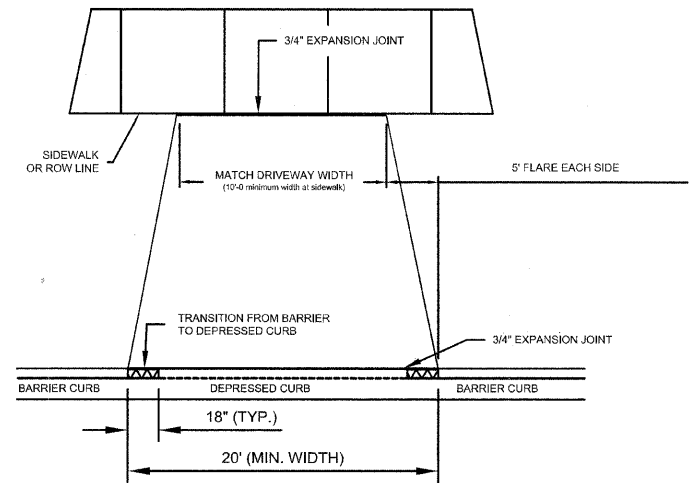


NOTE: THIS PAY ITEM MAY BE USED FOR BIKE PATH REPAIRS

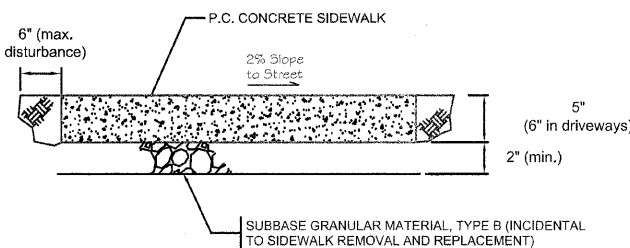

TYPICAL DRIVEWAY DETAIL

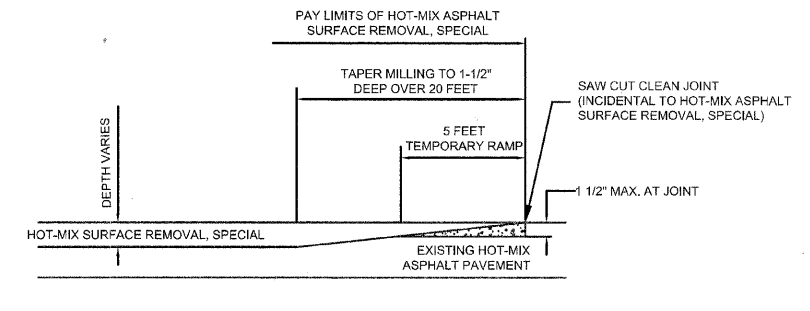

TYPICAL BIKE PATH DETAIL

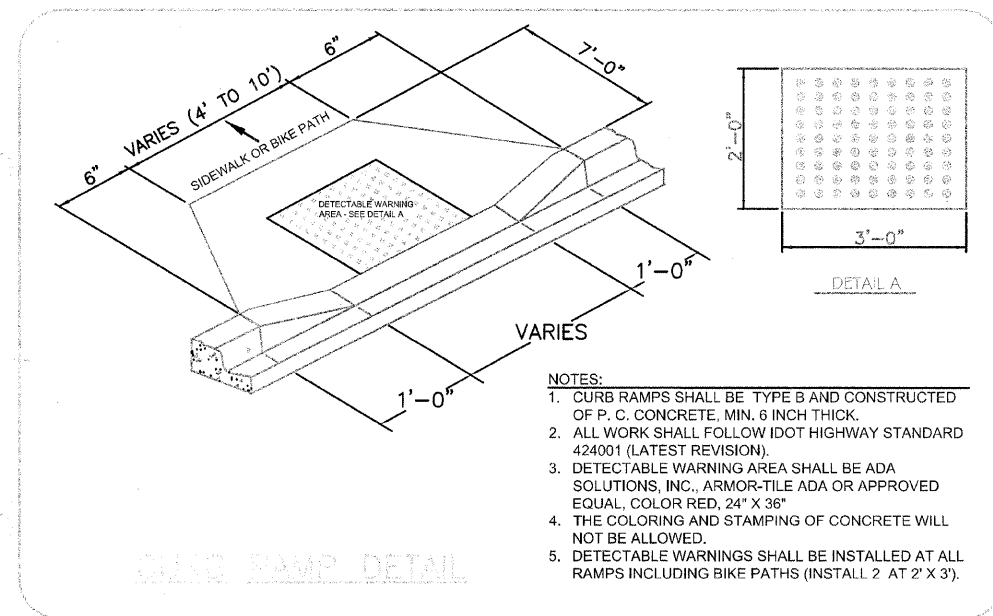

- NOTES:
1. CURB RAMPS SHALL BE TYPE B AND CONSTRUCTED OF P. C. CONCRETE, MIN. 6 INCH THICK.
 2. ALL WORK SHALL FOLLOW IDOT HIGHWAY STANDARD 424001 (LATEST REVISION).
 3. DETECTABLE WARNING AREA SHALL BE ADA SOLUTIONS, INC., ARMOR-TILE ADA OR APPROVED EQUAL, COLOR RED, 24" X 36"
 4. THE COLORING AND STAMPING OF CONCRETE WILL NOT BE ALLOWED.
 5. DETECTABLE WARNINGS SHALL BE INSTALLED AT ALL RAMPS INCLUDING BIKE PATHS (INSTALL 2 AT 2' X 3').



CITY OF AURORA
ENGINEERING DIVISION
44 EAST DOWNER PLACE

DESIGNED - CHRIS LIROT
DRAWN - ALBERTO SANCHEZ
CHECKED - CHRIS LIROT
DATE - 10/1/09

REVISED -
REVISED -
REVISED -
REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

CONSTRUCTION DETAILS

SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA. N/A TO STA. N/A

F.P.R. RTE. 1503	SECTION 10-00290-00-RS	COUNTY KANE	TOTAL SHEETS 10
FED. ROAD DIST. NO.		ILLINOIS FED. AID PROJECT	