



NOTE:
CAREFUL REMOVAL OF THE EXISTING SIDEWALK SHALL BE TAKEN AS TO NOT DAMAGE THE ABUTMENT WALL.

PLAN VIEW UNDER VIADUCT, IL 16

- PROPOSED SIDEWALK REMOVAL
 TOTAL QUANTITY = 225.7 SQ FT
 - PROPOSED CONCRETE SIDEWALK, 4"
 TOTAL QUANTITY = 225.7 SQ FT

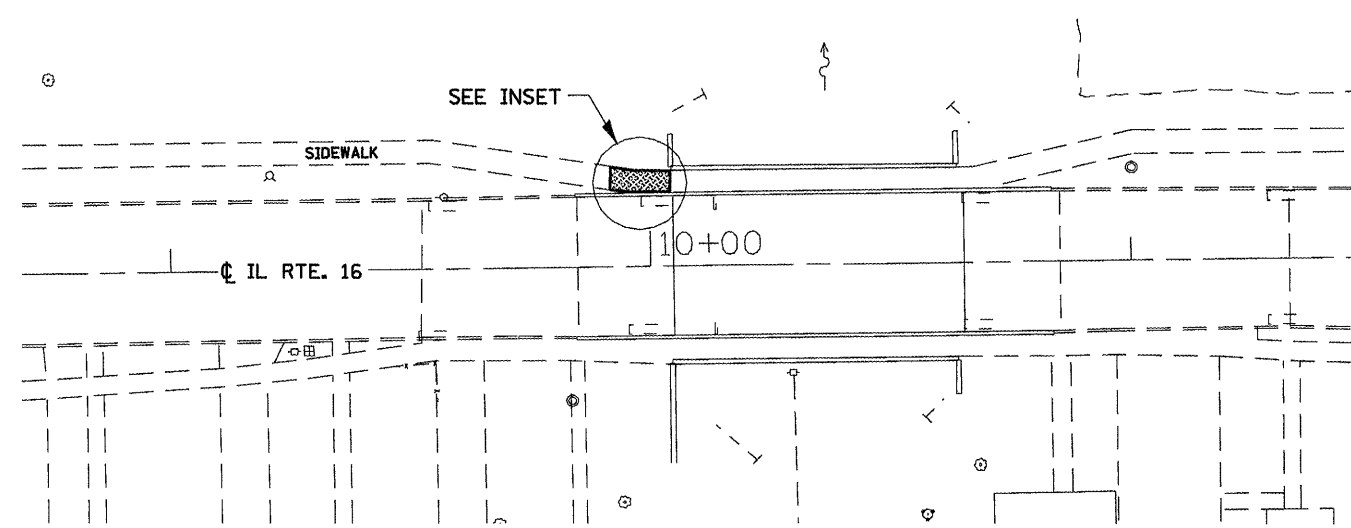

PLAN VIEW AT MIDDLE CREEK STRUCTURE, IL 16

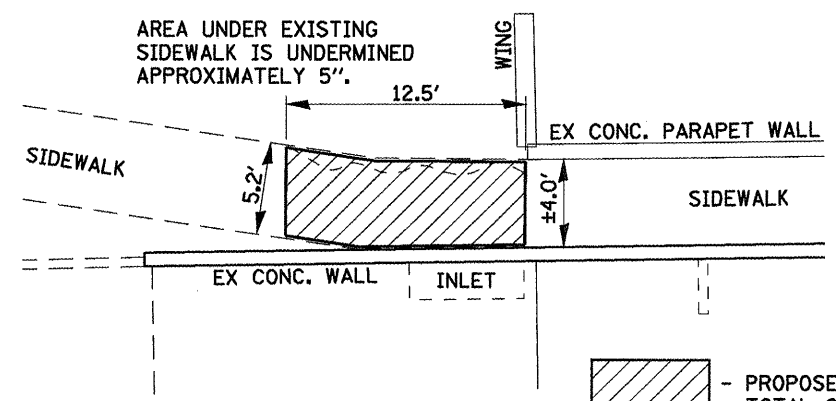

NOTE:
CAREFUL REMOVAL OF THE EXISTING SIDEWALK SHALL BE TAKEN AS TO NOT DAMAGE THE CONCRETE WALL AND POSSIBLE DRAINAGE ITEMS BELOW THE SIDEWALK. CAREFUL COMPACTION OF PROPOSED SUB-BASE MATL. SHALL ALSO BE TAKEN AS TO NOT DAMAGE SAID ITEMS.

- PROPOSED SIDEWALK REMOVAL
 TOTAL QUANTITY = 55.5 SQ FT
 - PROPOSED SUB-BASE GRAN MATL. TY. B, 5"
 TOTAL QUANTITY = 6.2 SQ YD
 - PROPOSED CONCRETE SIDEWALK, 4"
 TOTAL QUANTITY = 55.5 SQ FT

FILE NAME =	USER NAME = laughlinr1
c:\pwork\pwork\LAUGHLINR1\0805356\	72C52-shd-details.dgn
PLOT SCALE = 40.0000' / 1"	CHECKED - MEB
PLOT DATE = Mar-26-2010 12:00:43PM	DATE - 01-29-10

DESIGNED - RTS	REVISED -
DRAWN - RTS	REVISED -
CHECKED - MEB	REVISED -
DATE - 01-29-10	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SIDEWALK DETAILS	
SCALE:	SHEET NO. 1 OF 1 SHEETS STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
**	*	MONTGOMERY	60	54
CONTRACT NO. 72C52				
ILLINOIS FED. AID PROJECT				

*- 20RS-7, 21RS-6, 104RS, 105RS-4
**- 42, 325