STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

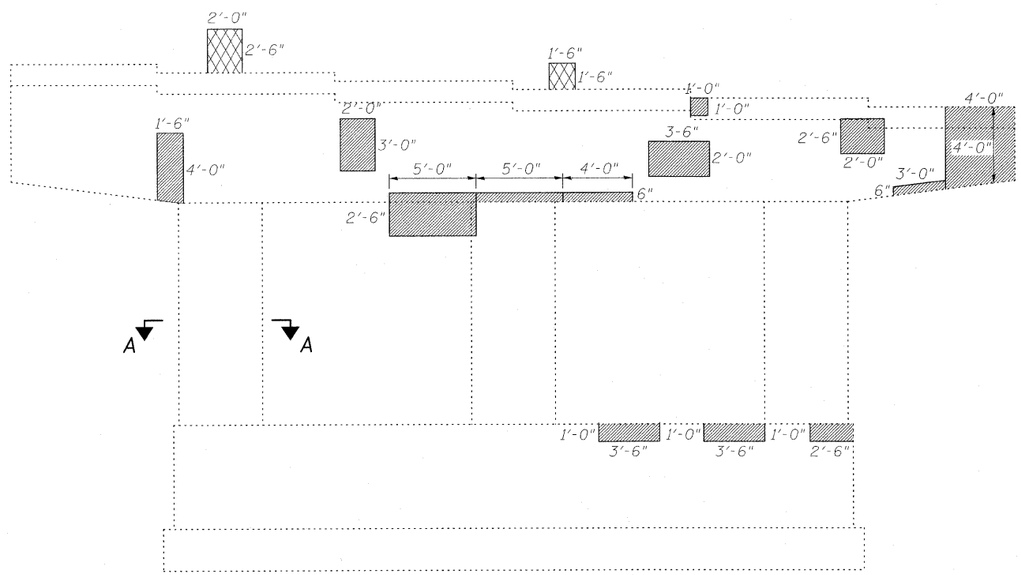

PIER 1
(Looking North)

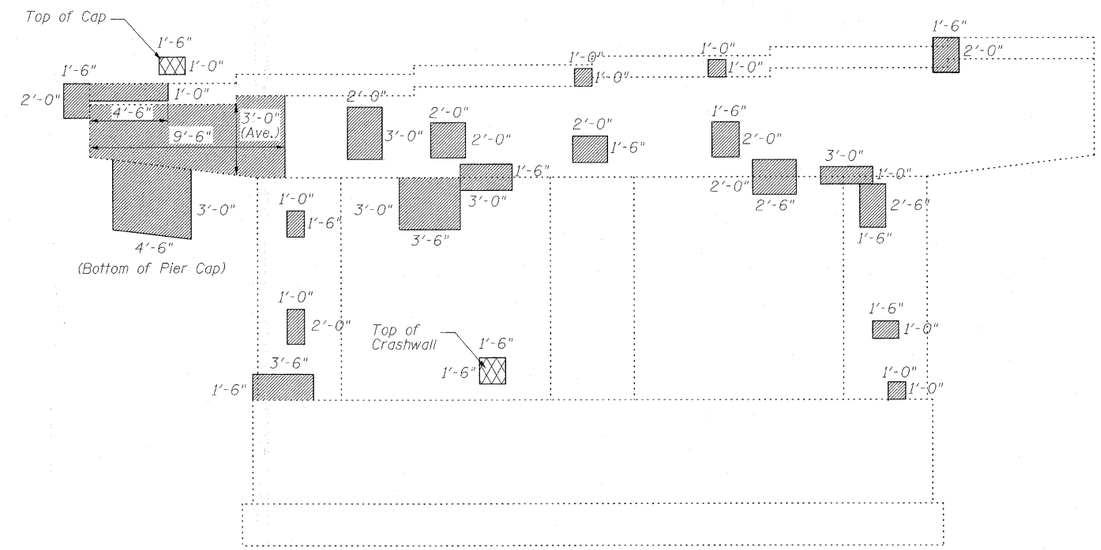

PIER 1
(Looking South)

Indicates Unsound Concrete Removal

Indicates Structural Repair of Concrete



SECTION A-A
Typical Section
Through Column

Notes:
Rubbed finish for Structural Repair of Concrete Areas shall be completed according to article 503.15 of the Standard Specifications.

BILL OF MATERIAL

Item	Unit	Total
Structural Repair of Concrete (Depth equal to or less than 5")	Sq. Ft.	178
Rubbed Finish	Sq. Ft.	178
Unsound Concrete Removal	Sq. Yd.	1.2

DESIGNED	B.B.
CHECKED	C.J.F.
DRAWN	W.J.S.
CHECKED	C.J.F. & B.B.

BERNARDIN LOCHMUELLER & ASSOCIATES, INC.
3 Oak Drive
Maryville, IL 62062-5635
Local-(618) 288-4665
Fax 618-288-4666

PIER 1 REPAIR DETAILS
STRUCTURE NO. 025-0001

SHEET NO. 23	F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
27 SHEETS	57	(25-3HB)I-2	EFFINGHAM	1416	1377
	SN 025-0001		CONTRACT NO. 74296		
	FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT		

10:46:33 AM 3/18/2010 \025C001-742944.dgn