





STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

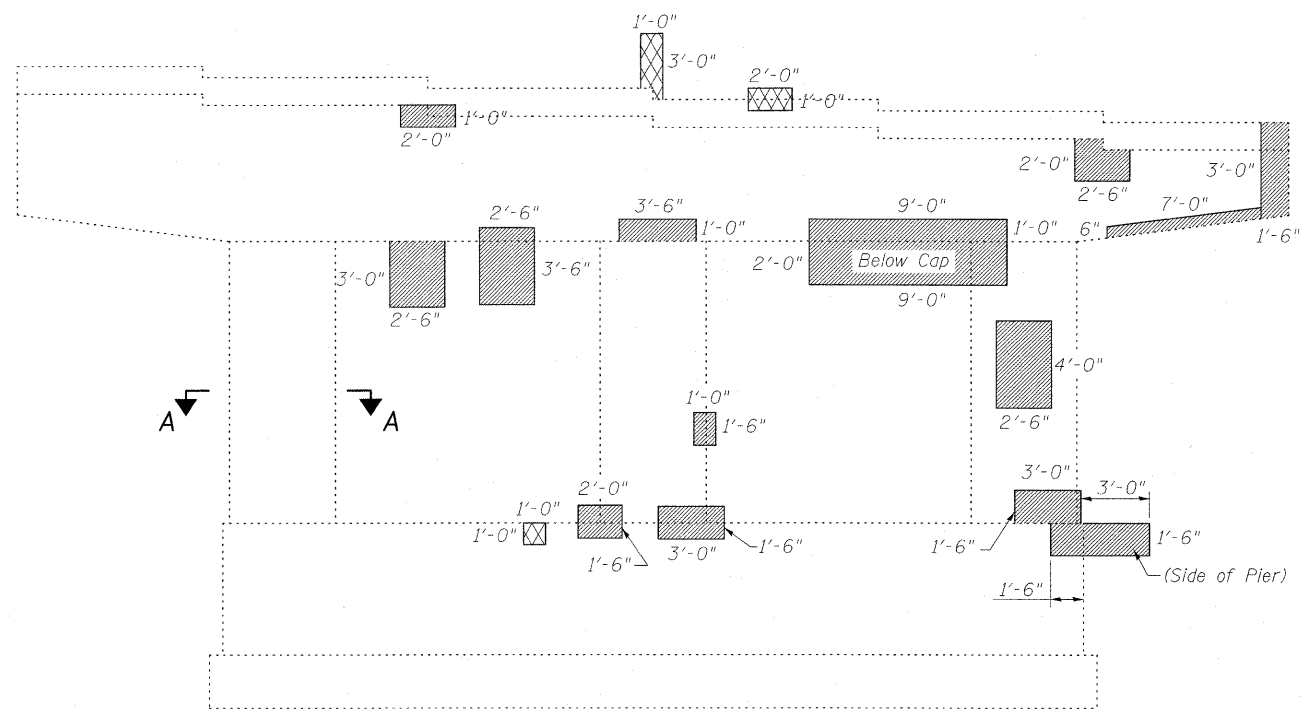


PIER 2
(Looking North)

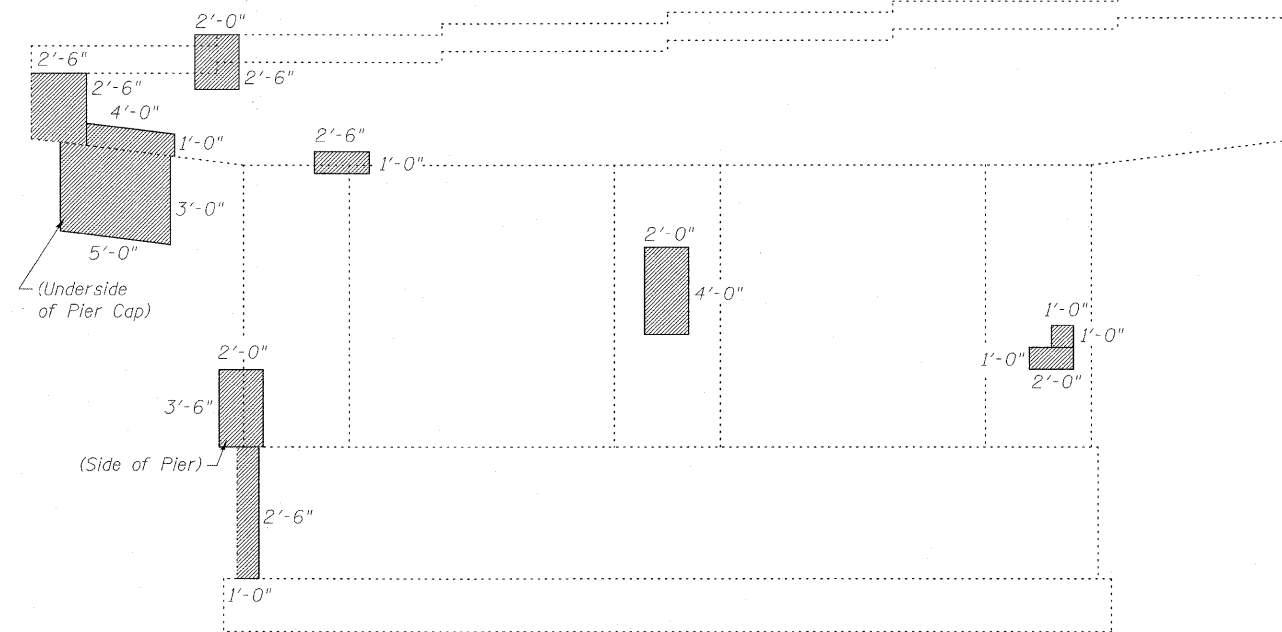

PIER 2
(Looking South)

 Indicates Unsound Concrete Removal
 Indicates Structural Repair of Concrete



SECTION A-A
Typical Section
Through Column

Notes:
Rubbed finish for Structural Repair of Concrete Areas shall be completed according to article 503.15 of the Standard Specifications.

BILL OF MATERIAL

Item	Unit	Total
Structural Repair of Concrete (Depth equal to or less than 5")	Sq. Ft.	145
Rubbed Finish	Sq. Ft.	145
Unsound Concrete Removal	Sq. Yd.	0.7

DESIGNED	B.B.
CHECKED	C.J.F.
DRAWN	W.J.S.
CHECKED	C.J.F. & B.B.



**BERNARDIN
LOCHMUELLER &
ASSOCIATES, INC.**

3 Oak Drive
Maryville, IL 62442-5635
Local (618) 288-4665
Fax 618-288-4666

SHEET NO. 26 27 SHEETS	F.A.I. RTE. 57	SECTION (25-3HB)I-2	COUNTY EFFINGHAM	TOTAL SHEETS 1416	SHEET NO. 1380
	SN 025-0001		CONTRACT NO. 74296		
FED. ROAD DIST. NO. 7 ILLINOIS FED. AID PROJECT					

**PIER 2 REPAIR DETAILS
STRUCTURE NO. 025-0001**