

F.A.S. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1472	07-00073-09-WR	McLEAN	8	1
FED. ROAD DIST. NO. 5		ILLINOIS	CONTRACT NO. 91434	

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION  
DIVISION OF HIGHWAYS

**PLANS FOR PROPOSED  
McLEAN COUNTY  
FEDERAL AID SECONDARY (STP-SR)  
PIPELINE RD (CH 31)  
F.A.S. ROUTE 1472 SECTION 07-00073-09-WR  
PROJECT #RS-1472(104)  
JOB #C-95-324-10**

**INDEX OF SHEETS**

- 1. COVER SHEET
- 2-3. TYPICAL CROSS SECTIONS
- 4-5. DETAILS
- 6-8. PLAN SHEETS



**STATE STANDARD DETAILS**

- 701001-02 OFF-RD OPERATIONS, 2L, 2W, MORE THAN 15' AWAY
- 701006-03 OFF-RD OPERATIONS, 2L, 2W, 15' TO 24" FROM PAVEMENT EDGE
- 701011-02 OFF-RD MOVING OPERATIONS, 2L, 2W, DAY ONLY
- 701201-03 LANE CLOSURE, 2L, 2W, DAY ONLY, FOR SPEEDS > 45 MPH
- 701301-03 LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
- 701326-03 LANE CLOSURE, 2L, 2W, PAVEMENT WIDENING, FOR SPEEDS > 45 MPH
- 701306-02 LANE CLOSURE, 2L, 2W, SLOW MOVING OPERATIONS DAY ONLY, FOR SPEEDS > 45 MPH
- 701901-01 TRAFFIC CONTROL DEVICES
- 781001-03 TYPICAL APPLICATIONS RAISED REFLECTIVE PAVEMENT MARKERS

**SUMMARY OF QUANTITIES**

ITEM NUMBER	ITEM	UNIT	QUANTITY
* 20200500	EARTH EXCAVATION (WIDENING)	CU YD	848
35600700	HOT-MIX ASPHALT BASE COURSE WIDENING, 6"	SQ YD	5,086
* 40600100	BITUMINOUS MATERIALS (PRIME COAT)	GALLON	4,100
* 40600300	AGGREGATE (PRIME COAT)	TON	200
* 40600625	LEVELING BINDER (MACHINE METHOD), N50	TON	2,100
40600982	HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT	SQ YD	286
40600990	TEMPORARY RAMP	SQ YD	40
* 40603080	HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N50	TON	5,200
* 40603310	HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N50	TON	2,900
* 40800010	BITUMINOUS MATERIALS (PRIME COAT)	GAL	200
* 40800030	AGGREGATE (PRIME COAT)	TON	15
* 40800050	INCIDENTAL HOT-MIX ASPHALT SURFACING	TON	250
* 44300300	AREA REFLECTIVE CRACK CONTROL TREATMENT, SYSTEM A	SQ YD	40,689
* 48101200	AGGREGATE SHOULDERS, TYPE B	TON	3,000
67100100	MOBILIZATION	L SUM	1
70103700	TRAFFIC CONTROL COMPLETE	L SUM	1
△ 78100100	RAISED REFLECTIVE PAVEMENT MARKER	EACH	190

\* SEE SPECIAL PROVISIONS  
△ SPECIALTY ITEMS

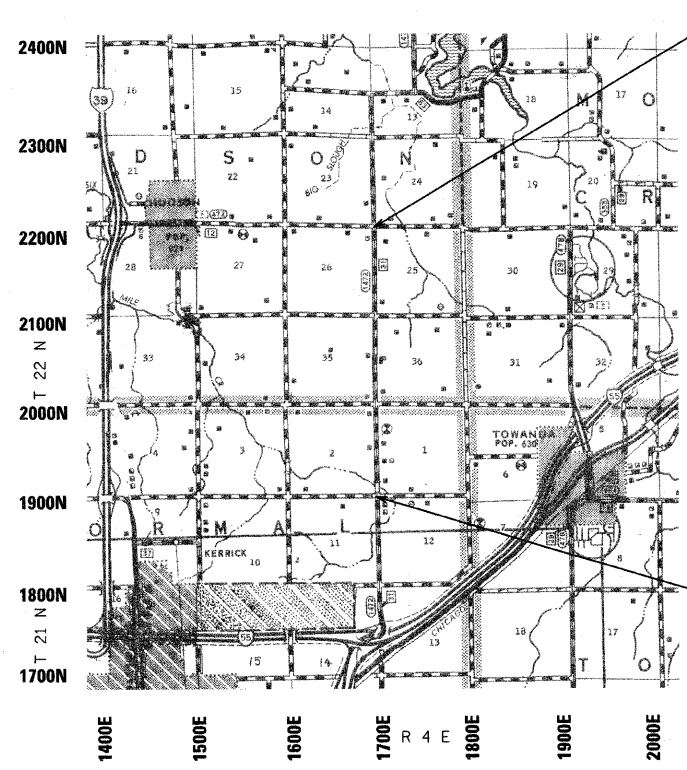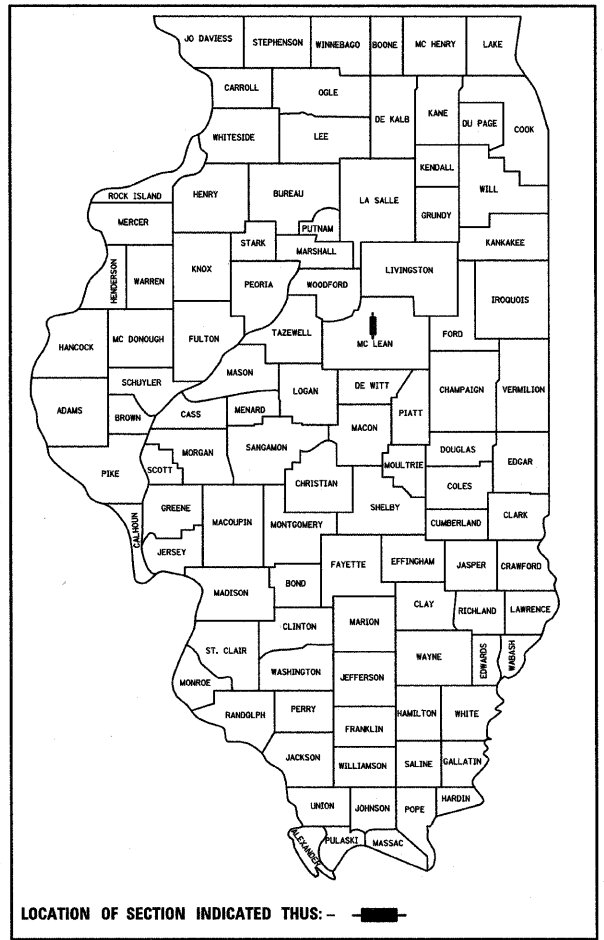

ENDING STA: 241+02.5  
OMISSION 90'  
STA: 240+12.5  
TO STA: 241+02.5

BEGINNING STA: 80+27.5  
OMISSION 726.5'  
STA: 80+27.5 TO STA: 87+54

- NOTE: THE TOTAL LENGTH OF THE PROPOSED PROJECT IS 16,075 FEET WITH A NET LENGTH OF 15,285.50 FEET (2.890 MILES)
- NOTE: THESE PLANS MEET THE MINIMUM REQUIREMENTS FOR A 3R IMPROVEMENT.
- NOTE: CURRENT ADT: 2100  
FUNCTIONAL CLASSIFICATION: MAJOR COLLECTOR
- NOTE: THE PLANS FOR SECTION 07-00073-09-WR ARE THOSE AS APPROVED IN SECTION 73 C.

**JOHN W. STUBBS**  
ILLINOIS PROFESSIONAL ENGINEER #57636  
EXPIRES 11-30-2011

J.U.I.E.  
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION  
1-800-892-0123  
OR 811

**PROJECT ENGINEER  
PROJECT MANAGER**  
  
**CONTRACT NO. 91434**

**McLEAN COUNTY  
HIGHWAY DEPARTMENT**

APPROVED Feb. 23, 20 10  
*[Signature]*  
COUNTY ENGINEER

PASSED 3/15 20 10  
*[Signature]*  
DISTRICT FIVE ENGINEER OF  
LOCAL ROADS & STREETS

Releasing For  
Bid Based on  
Limited Review MARCH 16 20 10  
*[Signature]*  
DEPUTY DIRECTOR OF HIGHWAYS,  
REGION THREE ENGINEER

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

**PRINTED BY THE AUTHORITY  
OF THE STATE OF ILLINOIS**