




ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
FAP 347	06-00071-00-SW	COOK	17	5
ILLINOIS PROJECT TE-00D1(701)				
VILLAGE SECTION				
CONTRACT NO. 63183				

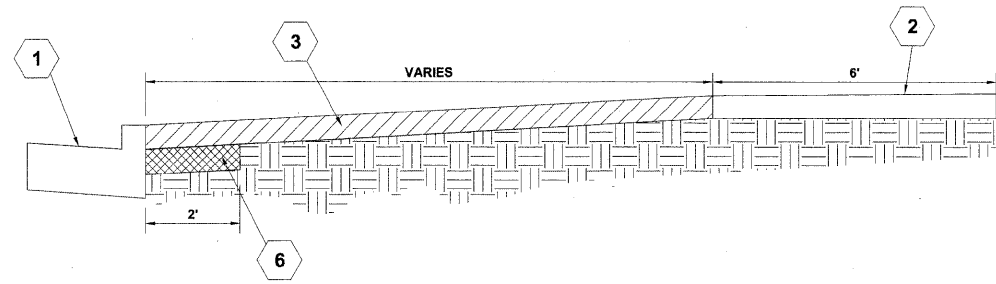


EXISTING TYPICAL CROSS SECTION
SOUTH SIDE OF ROOSEVELT ROAD
(STA. 326+07 TO STA. 326+33)

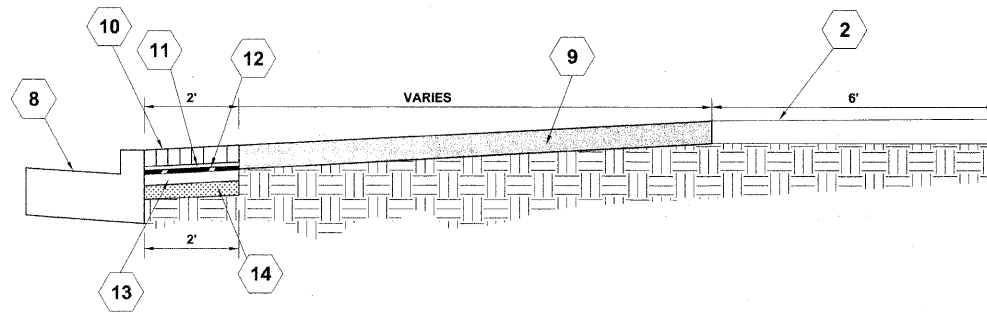

PROPOSED TYPICAL CROSS SECTION
SOUTH SIDE OF ROOSEVELT ROAD
(STA. 326+07 TO STA. 326+33)

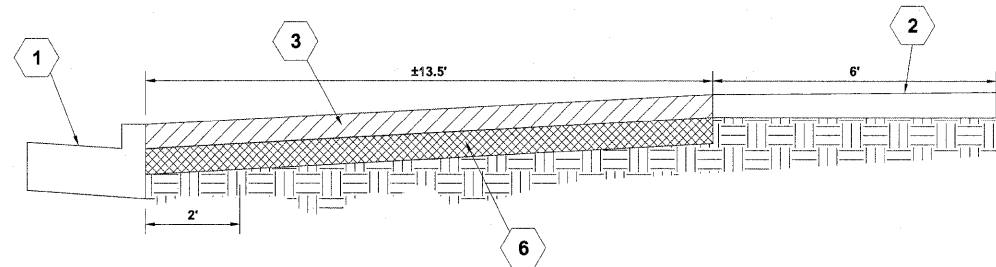

EXISTING TYPICAL CROSS SECTION
SOUTH SIDE OF ROOSEVELT ROAD
(STA. 327+44 TO STA. 327+64)

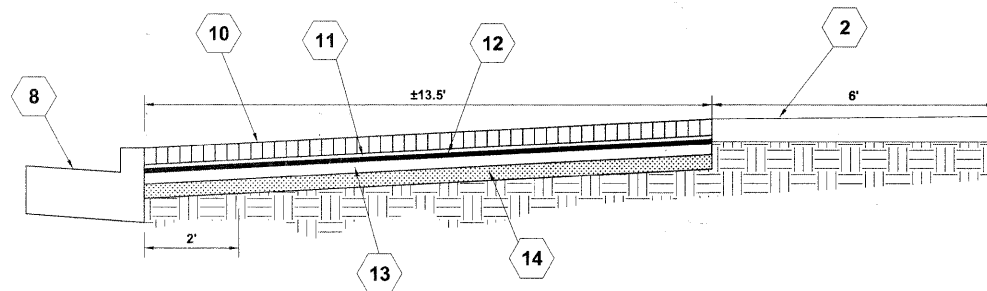

PROPOSED TYPICAL CROSS SECTION
SOUTH SIDE OF ROOSEVELT ROAD
(STA. 327+44 TO STA. 327+64)


TYPICAL CROSS SECTION LEGEND

EXISTING

- 1 COMBINATION CONCRETE CURB & GUTTER, TYPE B-6.24 (ONLY CERTAIN DETERIORATED SECTIONS TO BE REMOVED) (REMOVAL TO BE PAID AS COMBINATION CONCRETE CURB & GUTTER REMOVAL)
- 2 CONCRETE SIDEWALK
- 3 SIDEWALK REMOVAL
- 4 ASPHALT SURFACE, ±3" (REMOVAL TO BE INCLUDED IN PAY ITEM FOR EARTH EXCAVATION)
- 5 GRASS PARKWAY (REMOVAL TO BE INCLUDED IN PAY ITEM FOR EARTH EXCAVATION)
- 6 EARTH EXCAVATION
- 7 EXISTING PARKWAY AS NOTED ON PLANS

PROPOSED

- 8 COMBINATION CONCRETE CURB & GUTTER, TYPE B-6.24 (ONLY CERTAIN DETERIORATED SECTIONS TO BE REPLACED)
- 9 PORTLAND CEMENT CONCRETE SIDEWALK, 5"
- 10 BRICK PAVER, 2-3/8" (INCLUDED IN PAY ITEM FOR DECORATIVE BRICK SIDEWALK)
- 11 SAND CUSHION, 1" (INCLUDED IN PAY ITEM FOR DECORATIVE BRICK SIDEWALK)
- 12 FILTER FABRIC (INCLUDED IN PAY ITEM FOR DECORATIVE BRICK SIDEWALK)
- 13 PORTLAND CEMENT CONCRETE BASE COURSE, 3"
- 14 COMPACTED CA-6 STONE BEDDING, 4" (INCLUDED IN PAY ITEM FOR PORTLAND CEMENT CONCRETE BASE COURSE, 3")
- 15 PARKWAY RESTORATION AS NOTED ON PLANS

REVISION:	 <p>◆ Civil Engineers ◆ Municipal Consultants ◆ Established 1911</p> <p>9333 Riverside Road Westchester, Illinois 60591-2788 Phone: 708.965-6300 Fax: 708.965-1212</p> <p>VILLAGE OF WESTCHESTER ROOSEVELT ROAD (FAP 347) BEAUTIFICATION PROJECT TYPICAL CROSS SECTIONS</p> <p>DRAWN BY: MK CHECKED BY: JCG DATE: 04/15/09</p> <p>SCALE: NONE</p>