



ISLAND INFORMATION

POINT	STA	O/S	PROP. ELEV.
1	20+15.81	25.00' LT	680.69
2	20+15.81	29.00' LT	680.59
3	112+97.92	26.91' LT	680.32
4	112+96.22	30.53' LT	680.24
5	20+86.56	29.00' LT	680.02
6	20+86.56	25.00' LT	680.10
7	21+34.29	25.00' LT	679.91
8	21+34.29	29.00' LT	679.83
9	213+55.24	25.73' RT	679.47
10	213+55.24	21.73' RT	679.55
11	21+83.42	25.00' LT	679.85
12	20+28.97	25.00' RT	680.52
13	20+29.07	29.00' RT	680.44
14	300+80.33	14.41' LT	679.83
15	300+80.82	16.51' LT	679.87
16	20+78.78	29.00' RT	680.05
17	20+78.78	25.00' RT	680.13
18	21+53.79	25.00' RT	679.85
19	21+53.79	29.00' RT	679.77
20	401+04.75	32.00' RT	680.12
21	401+04.75	28.00' RT	680.19
22	21+96.42	25.00' RT	679.88

RADIUS INFORMATION

POINT	STA	O/S	PROP. ELEV.
23	19+69.00	36.74' RT	681.26
24	301+01.28	9.76' RT	679.01
25	301+57.51	5.79' RT	678.65
26	301+55.89	28.29' LT	678.78
27	21+16.57	44.73' RT	679.59
28	21+40.93	41.73' RT	679.56
29	401+33.85	43.53' RT	680.05
30	401+20.71	0.00' LT	679.74
31	400+55.81	19.06' LT	679.88
32	22+66.59	21.00' RT	680.17
33	22+59.60	21.00' LT	680.15
34	213+72.69	2.35' LT	679.20
35	213+00.14	32.28' RT	679.00
36	21+25.12	61.69' LT	679.14
37	21+10.91	59.48' LT	679.25
38	112+12.28	43.87' LT	679.25
39	112+66.38	0.00' RT	679.56
40	19+32.92	20.43' LT	682.44

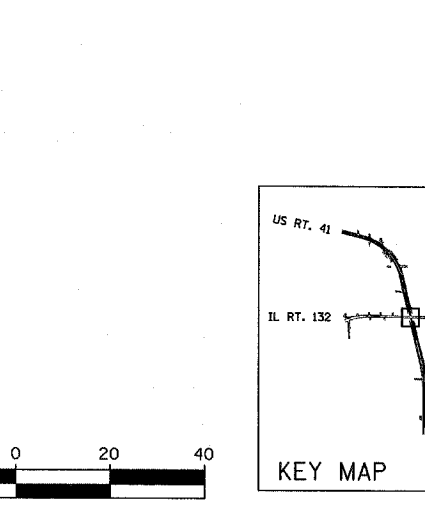

NOTES:

GRADES SHOWN WITH STATIONS INDICATE TRANSITION AREAS.

CURB RAMPS WILL BE MEASURED AND PAID FOR AS PCC SIDEWALK 5" OR CONCRETE MEDIAN SURFACE 4"

3/4" PREFORMED JOINT FILLER TO BE INCLUDED IN THE COST OF CONCRETE MEDIAN SURFACE 4"

REVISIONS	
NAME	DATE
AZ	6/17/08

ILLINOIS DEPARTMENT OF TRANSPORTATION
 U.S. 41 (SKOKIE HIGHWAY)
 AT IL ROUTE 132

INTERSECTION DETAILS

SCALE: 1"=20'
 DATE: MAY 12, 2008
 DRAWN BY: PAW
 CHECKED BY: ALB