


## TEMPORARY INFORMATION SIGNING

## NOTES:

- 1. USE 6" D BLACK LETTERING ON FLOURESENT ORANGE BACKGROUND.
- 2. ERECT SIGNS AT LOCATIONS IN ADVANCE OF THE "ROAD CONSTRUCTION AHEAD" SIGNS AS DIRECTED BY THE ENGINEER.
- 3. ERECT SIGN WITH INSTALLED PANEL ② A MINIMUM OF ONE WEEK PRIOR TO THE START OF THE LANE CLOSURE.
- 4. REMOVE PANEL @ ON THAT DATE.
- 5. SEE SPECIAL PROVISION "TEMPORARY INFORMATION SIGNING" FOR ADDITIONAL INFORMATION.
- 6. WILL BE PAID FOR PER SO FT AS "TEMPORARY INFORMATION SIGNING".
  EACH SIGN = 21 SO FT AND THE DATE PANEL (2) WILL NOT BE MEASURED
  SEPARATELY FOR PAYMENT.

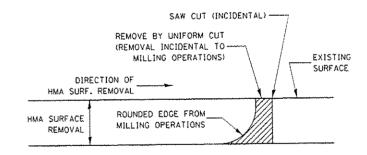

NOTE:

WHEN MILLING OPERATIONS PRODUCE A ROUNDED EDGE, THEN A SAW CUT SHALL BE USED TO MANUFACTURE A PERPENDICULAR EDGE AS SHOWN IN THE DETAIL. THE ENGINEER SHALL BE THE SOLE JUDGE CONCERNING THE USE OF THIS DETAIL

## HMA DETAIL AT BUTT JOINTS

|  |                             |            |           |                              |                                     | F.A.P. SECTION | COUNTY TOTAL SHEET |
|--|-----------------------------|------------|-----------|------------------------------|-------------------------------------|----------------|--------------------|
| FILE NAME /                              | USER WAYE / carpenters;     | DESIGNED - | REVISED - | STATE OF ILLINOIS            | DETAILS                             | 330 (15)RS-5   | KANKAKEE 31 31     |
| orlow-work \pridot\corpenters/\dms82592\ | heess,aga                   | DRAWN -    | REVISEO - |                              |                                     |                | CONTRACT NO. 66427 |
| ,  | PLO: SCALE : 40.0000 17 ps. | CHECKED -  | REVISED - | DEPARTMENT OF TRANSPORTATION | SCALE, SHEET OF SHEETS STA. TO STA. | ILLINOIS FED.  | AID PROJECT        |
| 15.2                                     | Dr.O* DATE + 67672814       | DATE -     | REVISED - |                              | SCALES SIGLES                       |                |                    |