


STATE OF ILLINOIS  
 DEPARTMENT OF TRANSPORTATION  
 DIVISION OF HIGHWAYS  
**PROPOSED  
 HIGHWAY PLANS**


FOR INDEX OF SHEETS, SEE SHEET NO. 2  
 FOR SUMMARY OF QUANTITIES, SEE SHEET NO. 3

VARIOUS ROUTES  
 D9 DECK SEAL 2015-1  
 NON-FEDERAL AID PROJECT  
 VARIOUS STRUCTURES  
 VARIOUS COUNTIES

C-99-027-14

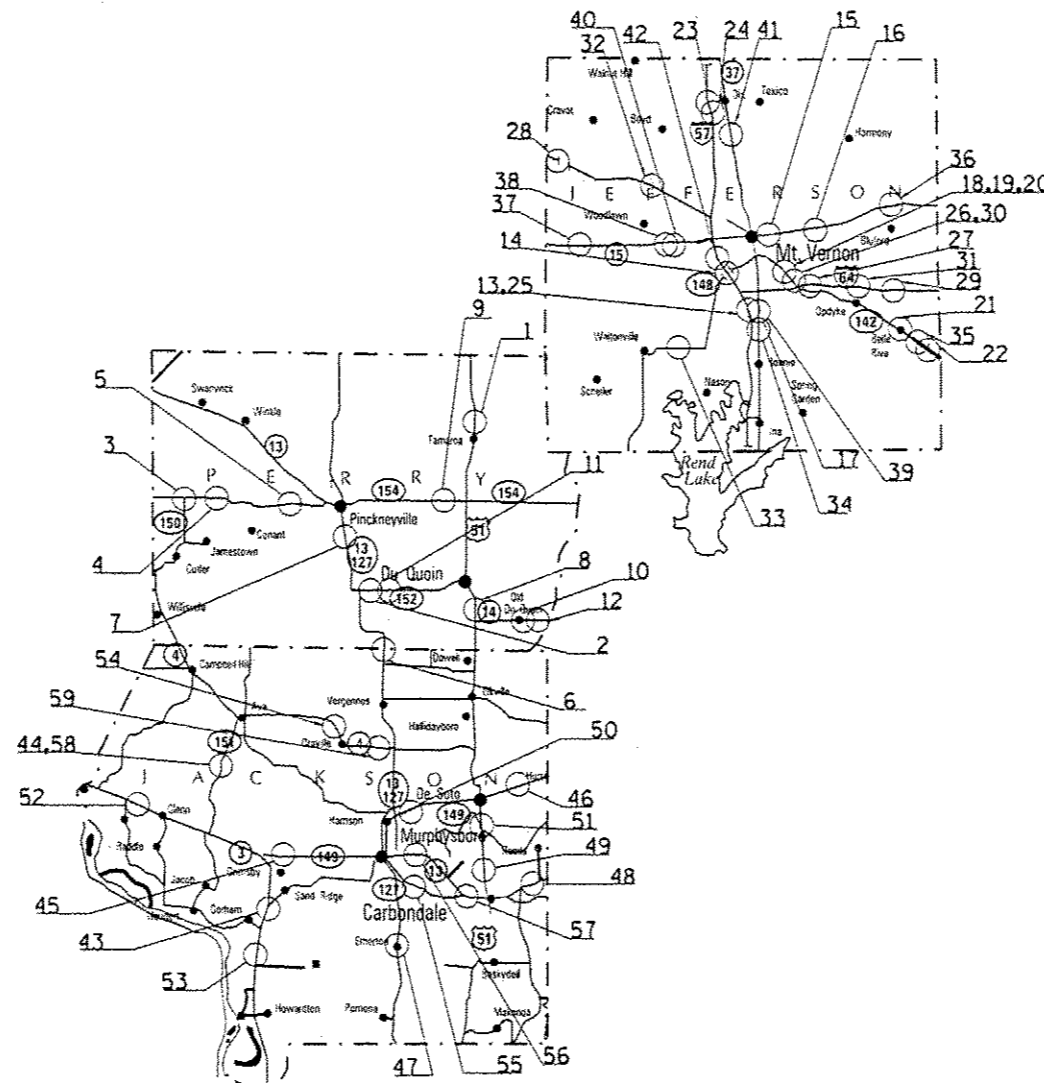

D-99-023-14

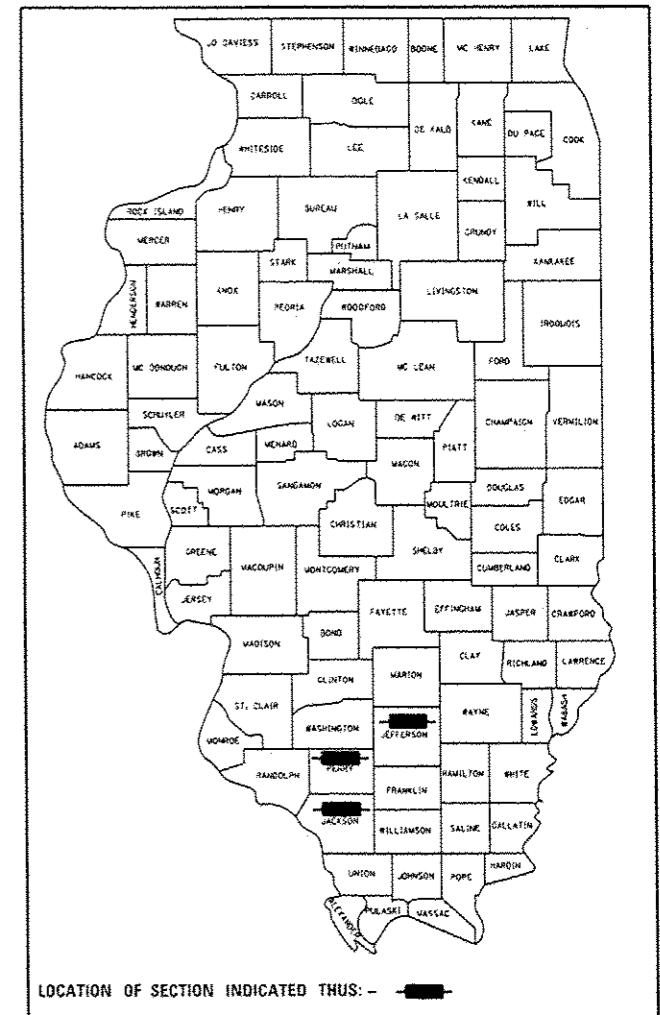

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	D9 DECK SEAL 2015-1	* ILLINOIS	6	1
			CONTRACT NO. 78403	
* VARIOUS				

J.U.L.I.E.  
 JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION  
 1-800-892-0123  
 OR 811

PROJECT ENGINEER: DAVID PICHE (618) 351-5227  
 DESIGNER: JOHN DAHMER

CONTRACT NO. 78403

STATE OF ILLINOIS  
 DEPARTMENT OF TRANSPORTATION  
 DIVISION OF HIGHWAYS

SUBMITTED April 22 20 14  
Jeffrey D. Keim  
 DEPUTY DIRECTOR OF HIGHWAYS, REGION ENGINEER

June 27 20 14  
John D. Baranzelli, PE, EIT  
 ENGINEER OF DESIGN AND ENVIRONMENT

June 27 20 14  
Omer Osman, PE, EIT  
 DIRECTOR OF HIGHWAYS, CHIEF ENGINEER

PRINTED BY THE AUTHORITY  
 OF THE STATE OF ILLINOIS







## BRIDGE DECK SEALING SCHEDULE JEFFERSON COUNTY

JEFFERSON				DECK AREA SQ FT	DIMENSIONS		MISC. AREA PARAPET/SAFTEYWALK		DECK CONCRETE SEALER
STRUCTURE NUMBER	ROUTE	FEATURED CROSSED	SQ FT		L	W	SQ FT	CONFIG.	SQ FT
13	041-0005	I 57 NB	CASEY FORK CREEK	17349.7	289.0	60.0	2023.0	A	19372.7
	041-0006	I 57 SB	CASEY FORK CREEK	17349.7	289.0	60.0	2023.0	A	19372.7
14	041-0008	I 57 NB	UNION PACIFIC R. R.	14452.7	255.8	56.5	1790.6	A	16243.3
	041-0009	I 57 SB	UNION PACIFIC R. R.	14452.7	255.8	56.5	1790.6	A	16243.3
15	041-0026	ILL 15	CASEY FORK CREEK	5704.8	142.5	40.0	997.5	A	6702.3
16	041-0027	ILL 15	SEVEN MILE CREEK	6893.6	168.0	41.0	1176.0	A	8069.6
17	041-0032	ILL 37	CASEY FORK CREEK	12255.9	385.0	31.8	2695.0	A	14950.9
18	041-0040	ILL 142	BRANCH OF CASEY CR	4515.0	125.3	36.0	877.1	A	5392.1
19	041-0041	ILL 142	CASEY FORK CR OVFL	4479.0	124.3	36.0	870.1	A	5349.1
20	041-0042	ILL 142	CASEY FORK CREEK	5999.6	166.5	36.0	1165.5	A	7165.1
21	041-0046	ILL 142	IC RR	4128.0	129.0	32.0	903.0	A	5031.0
22	041-0048	ILL 142	TRIB ROCKY BRANCH	1912.4	59.7	32.0	417.9	A	2330.3
23	041-0056	TR 39	I 57	5688.0	237.0	24.0	2409.5	B	8097.5
24	041-0057	TR 101	I 57	6068.5	229.0	26.5	2328.2	B	8396.7
25	041-0058	TR 379	I 57	6288.0	262.0	24.0	2663.6	B	8951.6
26	041-0062	ILL 142	I 64	11400.9	267.0	42.7	2714.5	B	14115.4
27	041-0063	TR 412	I 64	6307.0	238.0	26.5	2419.7	B	8726.7
28	041-0064	TR 26	I 64	6466.0	244.0	26.5	1708.0	A	8174.0
29	041-0065	TR 542	I 64	6522.4	248.0	26.3	2521.3	B	9043.7
30	041-0066	TR 364	I 64	6307.0	238.0	26.5	2419.7	B	8726.7
31	041-0072	TR 452A	I 64	6224.4	234.0	26.6	2379.0	B	8603.4
32	041-0079	TR 178	I 64	6434.7	241.0	26.7	2450.2	B	8884.9
33	041-0096	ILL 148	BIG MUDDY RIVER	20660.9	647.0	31.9	4529.0	A	25189.9
34	041-0097	ILL 37	DODDS CREEK	4420.6	138.0	32.0	966.0	A	5386.6
35	041-0099	ILL 142	ROCKY BRANCH CREEK	3940.1	123.0	32.0	861.0	A	4801.1
36	041-0102	ILL 15	IC RR	1432.8	39.8	36.0	278.6	A	1711.4
37	041-0103	ILL 15	RAYSE CREEK	4484.7	140.0	32.0	980.0	A	5464.7
38	041-0104	ILL 15	BIG MUDDY OVERFLOW	8417.4	233.6	36.0	1635.2	A	10052.6
39	041-0105	ILL 37	DODDS CREEK	4235.8	115.0	36.8	805.0	A	5040.8
40	041-0106	ILL 15	BIG MUDDY RIVER	5470.9	137.0	39.9	959.0	A	6429.9
41	041-0107	ILL 37	STREAM	2576.4	71.5	36.0	500.5	A	3076.9
42	041-0108	VET MEM DR.	I 64/ I 57	19240.0	260.0	74.0	1820.0	A*	21060.0
<b>TOTAL</b>									<b>306156</b>

\* INCLUDES RAISED MEDIAN

\* VARIOUS

FILE NAME = c:\pwworkh\pwworkh\dahmer\_ja\0349031\deckseal-design.dgn

USER NAME = Dahmer_ja	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100.0000' / 1" =	CHECKED -	REVISED -
PLOT DATE = 4/30/2014	DATE -	REVISED -

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

<b>SCHEDULE</b>			
SCALE:	SHEET NO.	OF SHEETS	STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	D9 DECK SEAL 2015-1	*	6	5
CONTRACT NO. 78403				
ILLINOIS FED. AID PROJECT				

## BRIDGE DECK SEALING SCHEDULE JACKSON COUNTY

JACKSON				DECK AREA SQ FT	DIMENSIONS		MISC. AREA PARAPET/SAFTEYWALK		DECK CONCRETE SEALER
STRUCTURE NUMBER	ROUTE	FEATURE CROSSED	L		W	SQ FT	CONFIG.	SQ FT	
43	039-0026	ILL 3	WORTHEN BAYOU	4335.0	144.5	30.0	1035.6	C	5370.6
44	039-0033	ILL 151	SPRING CREEK	1029.0	30.9	33.3	133.9	E	1162.9
45	039-0056	ILL 149	KINKAID CREEK	8573.8	237.5	36.1	1662.5	A	10236.3
46	039-0057	ILL 149	LITTLE MUDDY RIVER	7312.0	228.5	32.0	1599.5	A	8911.5
47	039-0060	ILL 127	CEDAR CREEK	3488.2	107.0	32.6	749.0	A	4237.2
48	039-0061	ILL 13 WB	CRAB ORCHARD CREEK	9920.7	247.4	40.1	1731.8	A	11652.5
	039-0062	ILL 13 WB	CRAB ORCHARD CR. OVFL	5981.3	146.6	40.8	1026.2	A	7007.5
49	039-0063	US 51	LIT CRAB ORCHARD CR	5334.3	108.2	49.3	757.4	A	6091.7
50	039-0064	ILL 149	BEAUCOUP CREEK	15944.4	442.9	36.0	3100.3	A	19044.7
51	039-0065	US 51	BIG MUDDY RIVER	14568.0	364.2	40.0	2549.4	A	17117.4
52	039-0066	ILL 3	REEDS CREEK	3528.0	98.0	36.0	686.0	A	4214.0
53	039-0067	ILL 3	DRAINAGE DITCH	2984.0	80.0	37.3	560.0	A	3544.0
54	039-0068	ILL 4	RATTLESNAKE CREEK	4861.8	146.0	33.3	1022.0	A	5883.8
55	039-0069	OLD ILL 13	MUD CREEK	2720.0	85.0	32.0	595.0	A	3315.0
56	039-0070	ILL 13 EB	MUD CREEK	7622.0	185.0	41.2	1295.0	A	8917.0
57	039-0071	ILL 13	LIT CRAB ORCHARD CR	10857.6	78.0	139.2	546.0	A*	11403.6
58	039-0073	ILL 151	KINKAID LAKE	4611.0	125.3	36.8	877.1	A	5488.1
59	039-0074	ILL 4	BEAUCOUP CREEK	14336.0	448.0	32.0	3136.0	A	17472.0
<b>TOTAL</b>									<b>151070</b>

\* INCLUDES RAISED MEDIAN

\* VARIOUS

FILE NAME = c:\pwworkh\pwworkh\dahmer\_ja\0349031\deckseal-design.dgn

USER NAME = Dahmer_ja	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100.0000' / 1" =	CHECKED -	REVISED -
PLOT DATE = 4/30/2014	DATE -	REVISED -

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**SCHEDULE**

SCALE:      SHEET NO.    OF    SHEETS    STA.      TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	D9 DECK SEAL 2015-1	*	6	6
<b>CONTRACT NO. 78403</b>				
<small>ILLINOIS FED. AID PROJECT</small>				