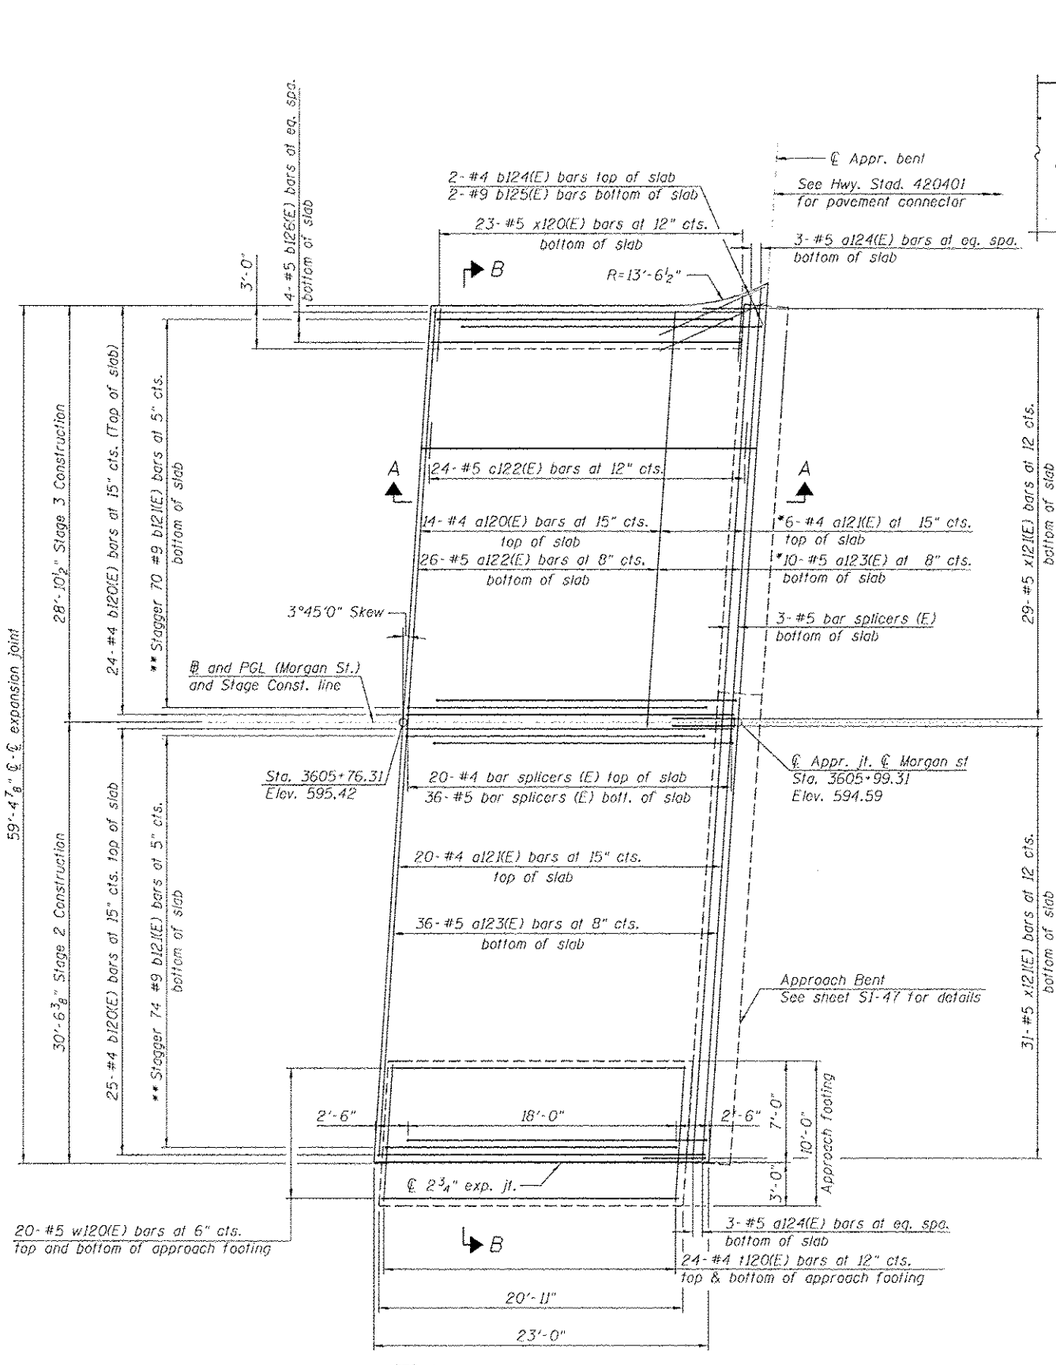

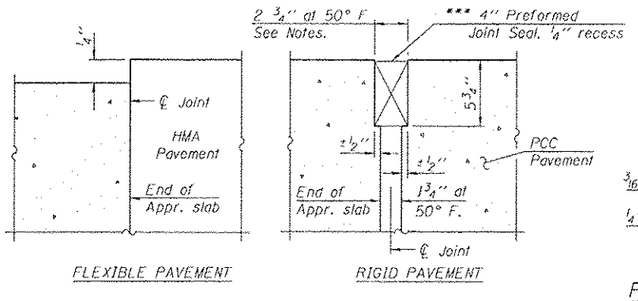

DETAIL A



PREFORMED
JOINT SEAL

NOTES:

1. See Sheet S1-46 for Sections A-A and B-B.
2. a120(E), a121(E), a122(E) and a123(E) bar spacings measured along ℄ Rdwy.
3. Provide ½" P.J.F. along the entire length of the west edge of the approach slab sidewalk adjacent to the wall parapet. See Section B-B on Sheet S1-46.
4. For sidewalk working points, see Sheet S1-15 for details.

* Order bars at full length and cut in field to fit.
** Tilt bars as required to maintain clearance.
*** Cost included with Concrete Superstructure.

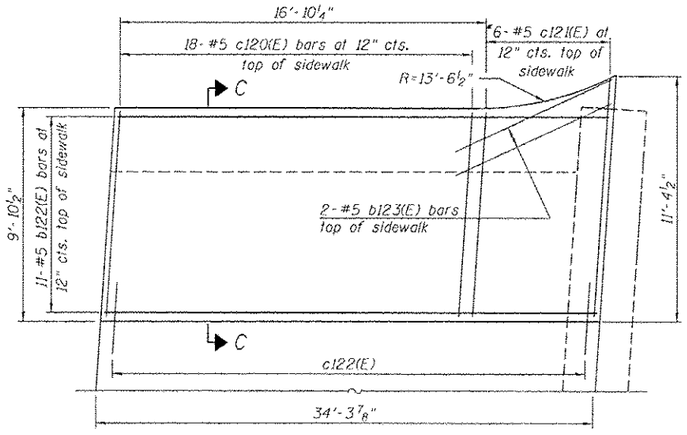

NW SIDEWALK PLAN — Z

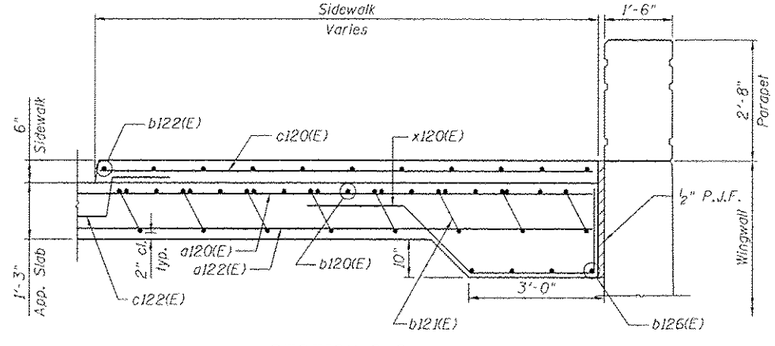

SECTION C-C

Entire sheet revised

HBM
ENGINEERING GROUP, LLC
CONSULTING & DESIGN
INSPECTION & RATING
RESEARCH & TESTING
4415 WEST HARRISON ST.
SUITE 231
HILLSIDE, IL 60162
PHONE: (708) 236-0900
FAX: (708) 236-0901

8161789-60W25-S45-NorthAppSlab1.dgn	DESIGNED - MI, PH, MWM	REVISED - ⚠ 07/19/2013 MI, WM	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	NORTH APPROACH SLAB PLAN STRUCTURE NO. 016-1709	F.A.I. RTE. 90/94/290	SECTION 2013-007R	COUNTY COOK	TOTAL SHEETS 317	SHEET NO. 189
USER NAME = williamdauna	DRAWN - PH	REVISED -					CONTRACT NO. 60W25		
PLOT SCALE = 50.0000 ' / in.	CHECKED - MAL, MI, MWM	REVISED -		SCALE:	SHEET S1-45 OF S1 SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT	
PLOT DATE = 7/15/2013	DATE - 6/17/2013	REVISED -							

FILE PATH = C:\Users\williamdauna\Desktop\Prints for Tim Day\8161789-60W25-S45-NorthAppSlab1.dgn