



F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
94	2006-043 RS	COOK	135	71
STA.		TO STA.		
FEL. ROAD DIST. NO. 1		ILLINOIS FED. AID PROJECT		

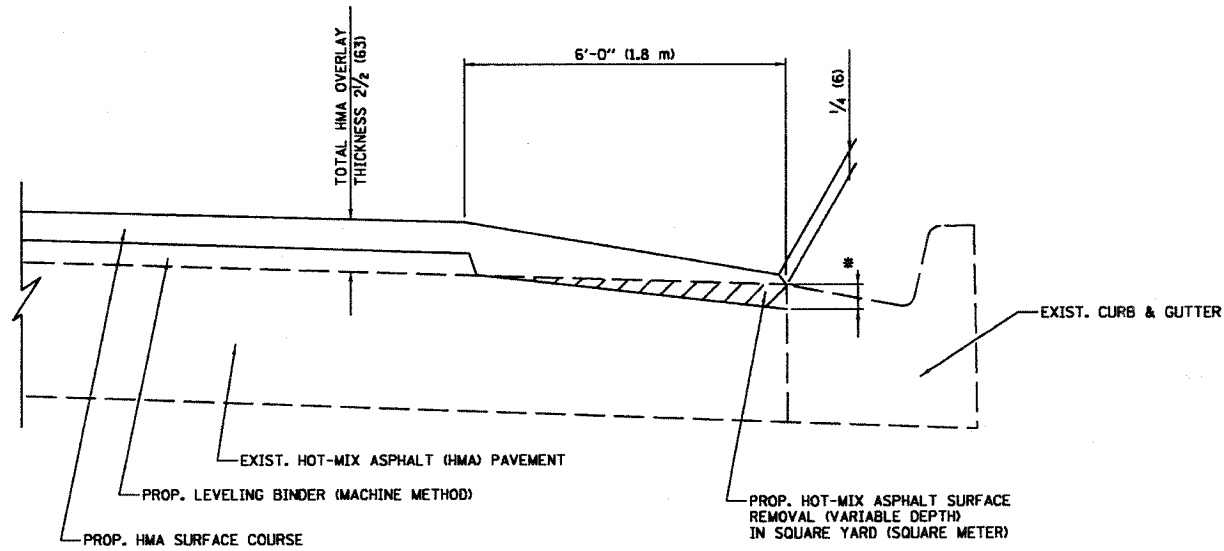

**HMA TAPER AT
EDGE OF HMA PAVEMENT**

HMA SURFACE		LEVELING BINDER	
MIX	THICKNESS	THICKNESS	* MILLING AT GUTTER FLAG
C OR D	1 1/2 (38)	1 (25)	1/4 (33)
F	1 3/4 (44)	3/4 (19)	1/2 (38)

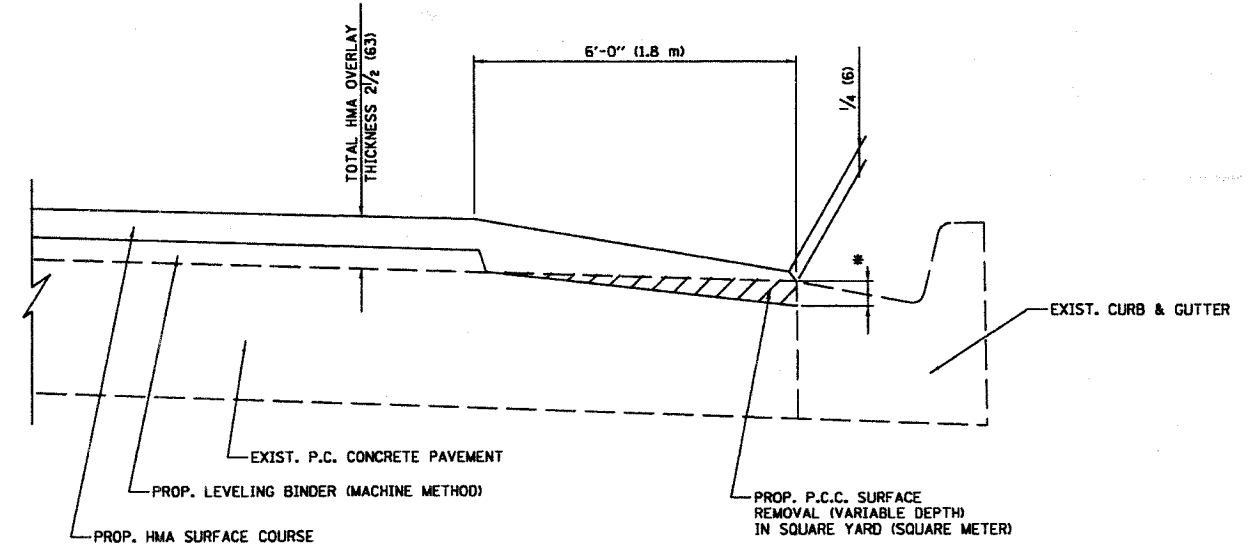

**HMA TAPER AT
EDGE OF P.C.C. PAVEMENT**

HMA SURFACE		LEVELING BINDER	
MIX	THICKNESS	THICKNESS	* MILLING AT GUTTER FLAG
C OR D	1 1/2 (38)	1 (25)	1/4 (33)
F	1 3/4 (44)	3/4 (19)	1/2 (38)

NOTE:

The proposed HMA Surface Removal (Variable Depth) and PCC Surface Removal (Variable Depth) shall be performed in accordance with Section 440 of the Standard Specifications. This work will be paid for at the contract unit price per square yard for HOT-MIX ASPHALT SURFACE REMOVAL (VARIABLE DEPTH) and PORTLAND CEMENT CONCRETE SURFACE REMOVAL (VARIABLE DEPTH).

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

REVISIONS	
NAME	DATE
R. SHAH	09/10/94
R. SHAH	10/25/94
A. ABBAS	05/05/99
E. GOMEZ	12/21/00
R. BORO	01/01/07

**HMA TAPER AT
EDGE OF PAVEMENT**

SCALE: NONE
PLOT DATE: 10/31/2006
DRAWN BY: JS
CHECKED BY: A. ABBAS
BD400-06 (BD33)
REVISION DATE: 01/01/07

6-26-07