
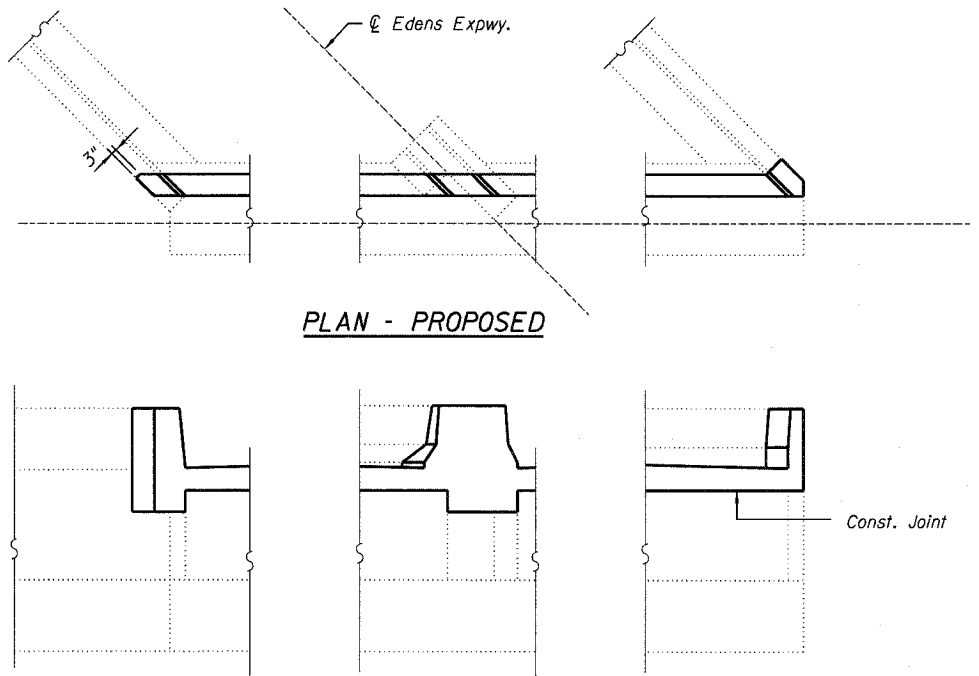


STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

ROUTE NO.	SECTION	COUNTY	SHEET NO.	TOTAL SHEETS
F.A.I. 94	2006-043 RS	COOK	135	128
FED. ROAD DIST. NO. 7		ILLINOIS	FED. AID PROJECT-	

Contract # 62747

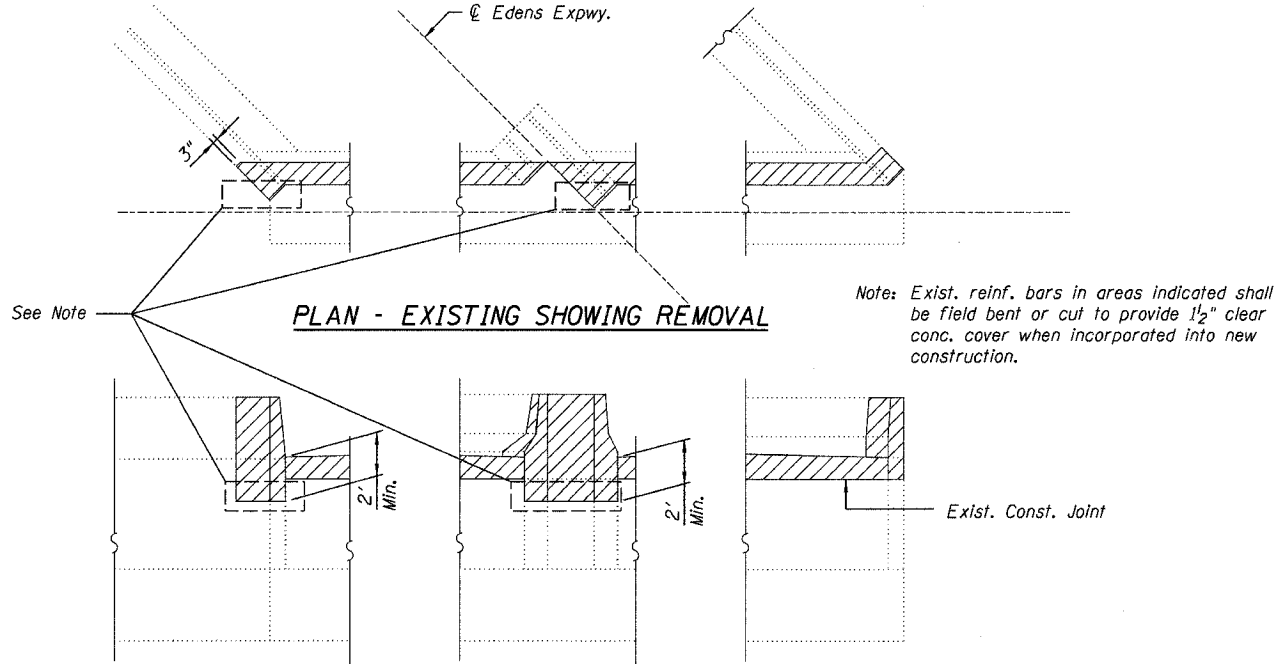

**SUPERSTRUCTURE  
BILL OF MATERIAL**

Bar	No.	Size	Length	Shape
a(E)	12	#6	51'-11"	—
a1(E)	40	#5	51'-11"	—
a2(E)	12	#6	48'-9"	—
a3(E)	40	#5	48'-9"	—
d(E)	16	#5	4'-1"	┘
d1(E)	16	#4	4'-5"	┘
d2(E)	16	#4	4'-1"	┘
d3(E)	12	#5	5'-4"	┘
d4(E)	2	#4	4'-0"	┘
d5(E)	16	#5	4'-2"	┘
x(E)	224	#5	2'-3"	—
Concrete Removal			Cu. Yd.	62.7
Concrete Superstructure			Cu. Yd.	70.9
Bridge Deck Grooving			Sq. Yd.	3,315
Protective Coat			Sq. Yd.	146
Reinforcement Bars, Epoxy Coated			Pound	6,840
Silicone Bridge Joint Sealer, 2"			Foot	296

**NOTES**

1. Reinforcement bars designated (E) shall be epoxy coated.
2. Work this sheet with Sheet No. 129

**REINFORCING BAR DETAILS &  
SUPERSTRUCTURE BILL OF MATERIAL  
F.A.I. 94/ (EDENS EXPRESSWAY)  
OVER CICERO AVE.  
COOK COUNTY  
STATION 29+14.49  
STRUCTURE NO. 016-0108**

DESIGNED -	JSD
CHECKED -	AMK
DRAWN -	JSD
CHECKED -	AMK

**LOCHNER**  
H.W. LOCHNER, INC., CHICAGO, ILLINOIS

**LEGEND**

Concrete Removal

T:\2298\struct\dgn\0108C.0M06.dgn