



F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	07-00026-00-RS	MCHENRY	10	3
STA.	TO STA.			
FED. ROAD DIST. NO. 1 C-91-154-07	ILLINOIS	FED. AID PROJECT M-8003 (757)		

CONTRACT NO.: 83929

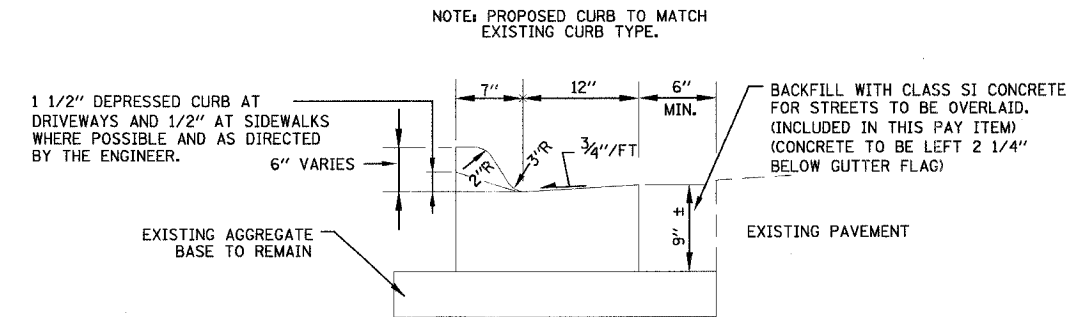

**DETAIL OF COMBINATION CONCRETE CURB & GUTTER REMOVAL & REPLACEMENT**

NO SCALE

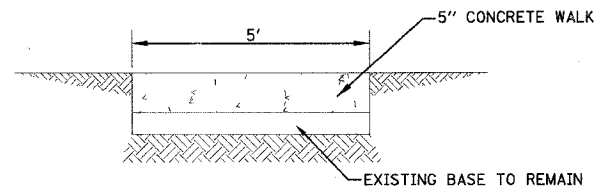

NOTE: PROVIDE FIBER 3/4" EXPANSION JOINTS WHERE NEW SIDEWALK MEETS EXISTING AND @ 50' O.C. MAX. AND PROVIDE CONTROL JOINTS @ 5' O.C.

**PORTLAND CEMENT CONCRETE (P.C.C.) SIDEWALK - 5 INCH**

NO SCALE

**SUMMARY OF QUANTITIES**

CODE NO.	PAY ITEM	UNIT	1000-2A
40600100	BITUMINOUS MATERIALS (PRIME COAT)	GALLON	1296
40600300	AGGREGATE (PRIME COAT)	TON	26
40600400	MIXTURE FOR CRACKS, JOINTS, AND FLANGEWAYS	TON	1
40600625	LEVELING BINDER (MACHINE METHOD), N50	TON	280
40603310	HOT-MIX ASPHALT SURFACE COURSE, MIX "C" N50	TON	654
42400200	PORTLAND CEMENT CONCRETE SIDEWALK 5 INCH	SQ FT	340
42400800	DETECTABLE WARNINGS	SQ FT	80
44000155	HOT-MIX ASPHALT SURFACE REMOVAL 1 1/2	SQ YD	3167
44000198	HOT-MIX ASPHALT SURFACE REMOVAL, VARIABLE DEPTH	SQ YD	3444
44001700	COMBINATION CONCRETE CURB AND GUTTER REMOVAL AND REPLACEMENT	FOOT	440
44004700	SIDEWALK REMOVAL (SPECIAL)	SQ FT	380
44201713	CLASS D PATCHES, TYPE I, 6 INCH	SQ YD	8
44201717	CLASS D PATCHES, TYPE II, 6 INCH	SQ YD	495
44201721	CLASS D PATCHES, TYPE III, 6 INCH	SQ YD	201
44201723	CLASS D PATCHES, TYPE IV, 6 INCH	SQ YD	514
48101200	AGGREGATE SHOULDERS - TYPE B	TON	1
60250200	CATCH BASINS TO BE ADJUSTED	EACH	5
60265700	VALVE VAULTS TO BE ADJUSTED	EACH	5
60266600	VALVE BOXES TO BE ADJUSTED	EACH	4
60406100	FRAMES AND LIDS, TYPE 1, CLOSED LID	EACH	1
67100100	MOBILIZATION	LSUM	1
70102620	TRAFFIC CONTROL AND PROTECTION, STANDARD 701501	LSUM	1
70102640	TRAFFIC CONTROL AND PROTECTION, STANDARD 701801	LSUM	1
78000200	THERMOPLASTIC PAVEMENT MARKING - LINE 4"	FOOT	108
78000400	THERMOPLASTIC PAVEMENT MARKING - LINE 6"	FOOT	84
78000600	THERMOPLASTIC PAVEMENT MARKING - LINE 12"	FOOT	196
78000650	THERMOPLASTIC PAVEMENT MARKING - LINE 24"	FOOT	21
X0301245	SHOULDER REMOVAL	SQYD	8
X0321556	SANITARY MANHOLES TO BE ADJUSTED	EACH	8

● INDICATES SPECIALTY ITEM

\*Revised 7-26-07

4/11/2007 4:48:55 PM I:\Marengo\061392-Maple LAPP\DWG\061392-500.dwg  
 COPYRIGHT © 2006 BY BAXTER & WOODMAN, INC.  
 STATE OF ILLINOIS - PROFESSIONAL ENGINEER  
 LICENSE NO. 120-0011 - EXPIRES 12/31/2011

CONSULTANTS	REV. NO.	DATE	DESCRIPTION
	1	3/21/07	PER I.D.O.T. REVIEW
	2	4/13/07	PER I.D.O.T. REVIEW

\* REFER TO EQUIPMENT MANUFACTURER'S SHOP DRAWINGS

DRAWING FILE: ... \DGN\061392-500.dwg

**BAXTER & WOODMAN**  
Consulting Engineers

*Baxter & Woodman*  
Crystal Lake, Illinois 815.459.1260  
Bacon, Illinois 815.773.1870  
Darlington, Wisconsin 262.752.7854  
Mokena, Illinois 708.478.9090  
Dekalb, Illinois 815.787.9111  
Oswego, Illinois 815.532.5095  
Rockford, Illinois 815.480.1551  
Plainfield, Illinois 815.608.7425  
Madison, Illinois 608.347.1542

**CITY OF MARENGO, ILLINOIS**  
MAPLE STREET  
STP (LAPP) IMPROVEMENTS

**SUMMARY OF QUANTITIES AND MISCELLANEOUS DETAILS**

DESIGNED BY	SCALE
MWP	NONE
DRAWN BY	PROJECT NO.
RKM	061392-40
CHECKED BY	SHEET NO.
MWP	
DATE	
02/09/07	<b>3 OF 10</b>