



F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	07-00026-00-RS	MCHENRY	10	3
STA.	TO STA.			
FED. ROAD DIST. NO. 1 C-91-154-07	ILLINOIS	FED. AID PROJECT M-8003 (757)		

CONTRACT NO.: 83929

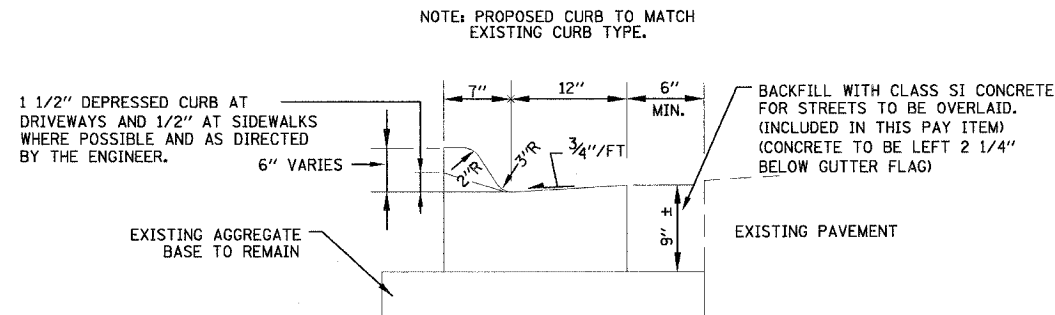

**DETAIL OF COMBINATION CONCRETE CURB & GUTTER
REMOVAL & REPLACEMENT**

NO SCALE

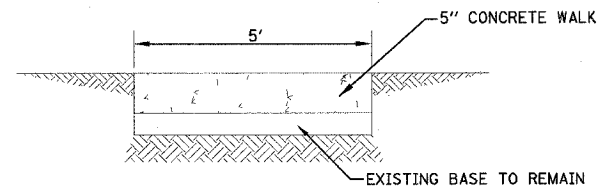

NOTE:
PROVIDE FIBER 3/4" EXPANSION JOINTS WHERE NEW SIDEWALK MEETS EXISTING AND @ 50' O.C. MAX. AND PROVIDE CONTROL JOINTS @ 5' O.C.

**PORTLAND CEMENT CONCRETE (P.C.C.)
SIDEWALK - 5 INCH**

NO SCALE

SUMMARY OF QUANTITIES

CODE NO.	PAY ITEM	UNIT	1000-2A
40600100	BITUMINOUS MATERIALS (PRIME COAT)	GALLON	1296
40600300	AGGREGATE (PRIME COAT)	TON	26
40600400	MIXTURE FOR CRACKS, JOINTS, AND FLANGEWAYS	TON	1
40600625	LEVELING BINDER (MACHINE METHOD), N50	TON	280
40601005	HOT-MIX ASPHALT REPLACEMENT OVER PATCHES	TON	106
40603310	HOT-MIX ASPHALT SURFACE COURSE, MIX "C" N50	TON	654
42400200	PORTLAND CEMENT CONCRETE SIDEWALK 5 INCH	SQ FT	340
42400800	DETECTABLE WARNINGS	SQ FT	80
44000155	HOT-MIX ASPHALT SURFACE REMOVAL 1 1/2	SQ YD	3167
44000198	HOT-MIX ASPHALT SURFACE REMOVAL, VARIABLE DEPTH	SQ YD	3444
44001700	COMBINATION CONCRETE CURB AND GUTTER REMOVAL AND REPLACEMENT	FOOT	440
44004700	SIDEWALK REMOVAL (SPECIAL)	SQ FT	380
44201713	CLASS D PATCHES, TYPE I, 6 INCH	SQ YD	8
44201717	CLASS D PATCHES, TYPE II, 6 INCH	SQ YD	495
44201721	CLASS D PATCHES, TYPE III, 6 INCH	SQ YD	201
44201723	CLASS D PATCHES, TYPE IV, 6 INCH	SQ YD	514
48101200	AGGREGATE SHOULDERS - TYPE B	TON	1
60250200	CATCH BASINS TO BE ADJUSTED	EACH	5
60265700	VALVE VAULTS TO BE ADJUSTED	EACH	5
60266600	VALVE BOXES TO BE ADJUSTED	EACH	4
60406100	FRAMES AND LIDS, TYPE 1, CLOSED LID	EACH	1
67100100	MOBILIZATION	LSUM	1
70102620	TRAFFIC CONTROL AND PROTECTION, STANDARD 701501	LSUM	1
70102640	TRAFFIC CONTROL AND PROTECTION, STANDARD 701801	LSUM	1
● 78000200	THERMOPLASTIC PAVEMENT MARKING - LINE 4"	FOOT	108
● 78000400	THERMOPLASTIC PAVEMENT MARKING - LINE 6"	FOOT	84
● 78000600	THERMOPLASTIC PAVEMENT MARKING - LINE 12"	FOOT	196
● 78000650	THERMOPLASTIC PAVEMENT MARKING - LINE 24"	FOOT	21
X0301245	SHOULDER REMOVAL	SOYD	8
X0321556	SANITARY MANHOLES TO BE ADJUSTED	EACH	8

● INDICATES SPECIALTY ITEM

4/10/2007 4:48:45 PM I:\Maren\061392-Maple LAPP CURB & SIDEWALKS-500.dwg
 5/22/07
 COPYRIGHT © 2006 BY BAXTER & WOODMAN, INC.
 STATE OF ILLINOIS PROFESSIONAL DESIGN FIRM
 OFFICE NO. 300 NORTH WASHINGTON STREET, CHICAGO, ILLINOIS 60601

CONSULTANTS	REV. NO.	DATE	DESCRIPTION
	1	3/21/07	PER I.D.O.T. REVIEW
	2	4/13/07	PER I.D.O.T. REVIEW

* REFER TO EQUIPMENT MANUFACTURER'S SHOP DRAWINGS

DRAWING FILE: ...N06N\061392-500.dwg

BAXTER & WOODMAN
Consulting Engineers

Baxter & Woodman
Crystal Lake, Illinois 815.459.1280
Hazen, Illinois 815.773.1870
Burlington, Wisconsin 262.783.7824
Mokena, Illinois 708.478.2090
Dekalb, Illinois 815.787.2111
Greeneville, Illinois 847.553.7098
Rockford, Illinois 815.489.1551
Plainfield, Illinois 815.638.7425
Madison, Illinois 608.347.1542

CITY OF MARENGO, ILLINOIS
MAPLE STREET
STP (LAPP) IMPROVEMENTS

**SUMMARY OF QUANTITIES AND
MISCELLANEOUS DETAILS**

DESIGNED BY MWP	SCALE NONE
DRAWN BY RKM	PROJECT NO. 061392.40
CHECKED BY MWP	SHEET NO.
DATE 02/09/07	3 OF 10