


SEEDING & MULCHING

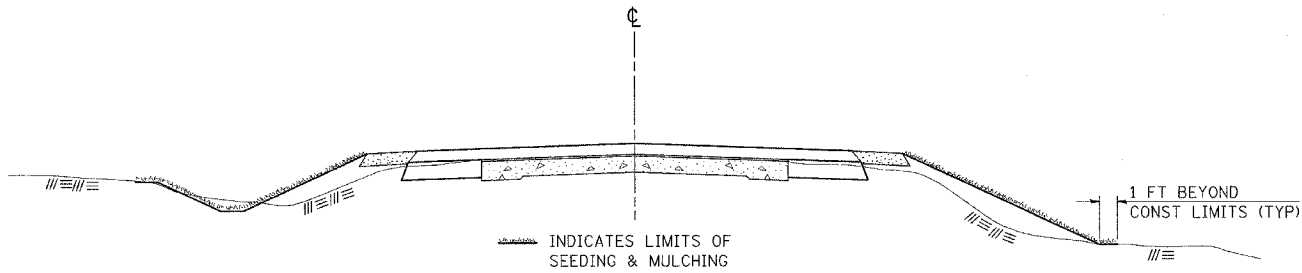

GENERAL NOTES

IN GENERAL, ALL EARTH SURFACES DISTURBED DURING CONSTRUCTION OPERATIONS SHALL BE SEEDED AND MULCHED UPON COMPLETION OF ALL GRADING OPERATIONS.

FERTILIZER NUTRIENTS AND LIMESTONE SHALL BE APPLIED TO ALL SEEDED AREAS.

THE RATES OF APPLICATION OF FERTILIZER, MULCH AND LIMESTONE SHALL BE AS SPECIFIED IN THE SPECIAL PROVISIONS.

SECTIONS 250 AND 251 OF THE STANDARD SPECIFICATIONS SHALL GOVERN THIS WORK EXCEPT AS SPECIFIED HEREIN OR AS NOTED IN THE SPECIAL PROVISIONS.

STD. 9-12

REVISIONS	
REDRAWN	2-15-89
REVISED	8-15-94
REVISED	6-3-99
REVISED	


DETAIL - BITUMINOUS SHOULDER

AT GUARDRAIL TERMINAL

F.A.P. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO
869	1048-1, 1048-2	FRANKLIN	56	38

STA.	TO STA.
FED. ROAD DIST. NO. -	ILLINOIS

FED. AID PROJECT

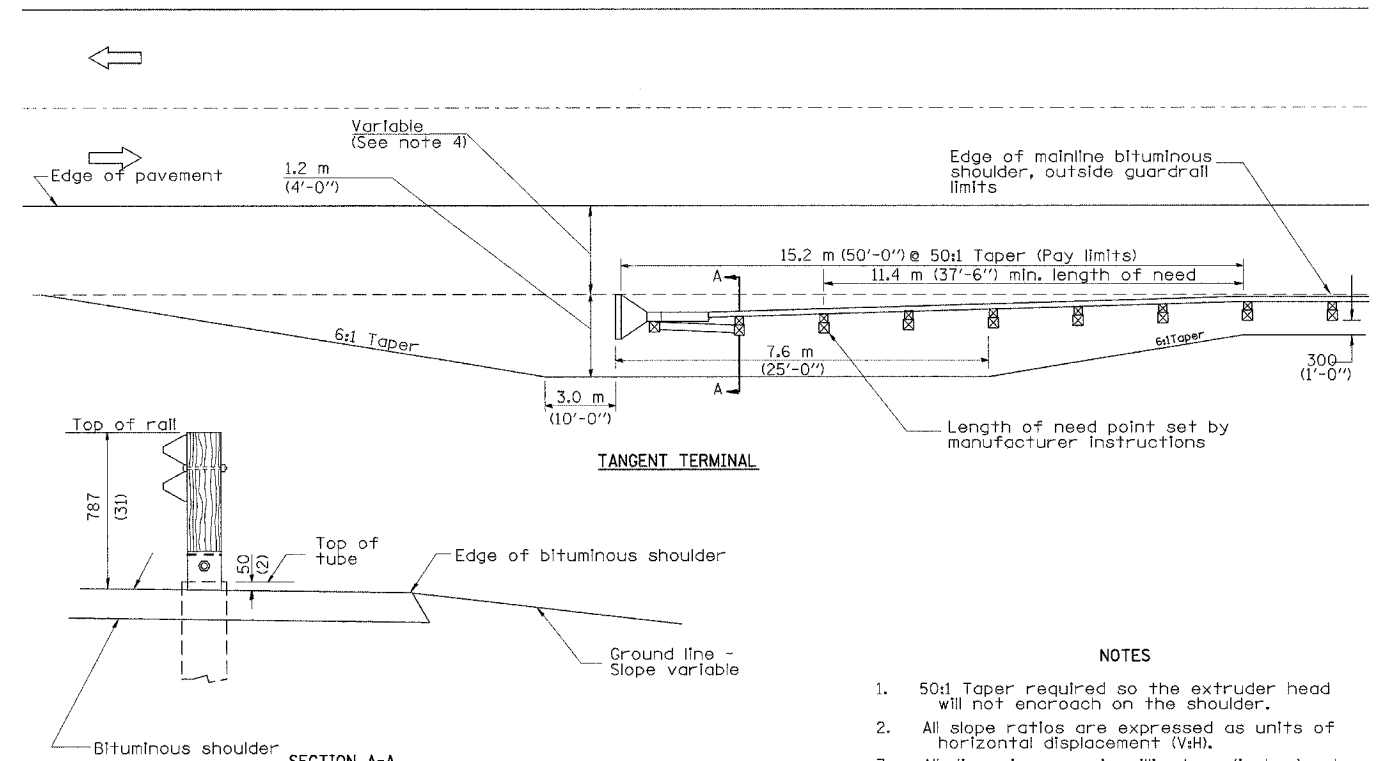

NOTES

- 50:1 Taper required so the extruder head will not encroach on the shoulder.
- All slope ratios are expressed as units of horizontal displacement (V:H).
- All dimensions are in millimeters (Inches) unless otherwise shown.
- Edge of extruder head shall be placed at the outside edge of mainline bituminous shoulder.