

LETTING ITEM NUMBER

7A

LETTING CONTRACT NUMBER

WI051

TOTAL SHEETS: 9

# CONSTRUCTION PLANS FOR OBSTRUCTION REMOVAL, RUNWAY 20 APPROACH NORTH EAST OF RUNWAY 2-20 AT WILLIAMSON COUNTY REGIONAL AIRPORT MARION-HERRIN, WILLIAMSON COUNTY, ILLINOIS

**DATE: 02/25/2007**

**REV: 06/12/2007**

ILLINOIS PROJECT No. MWA-3656

A.I.P. PROJECT No. 3-17-0065-

SUMMARY OF QUANTITIES				
ITEM NO.	DESCRIPTION	UNIT	QUANTITY	AS BUILT QUANTITY
AR150510	ENGINEER'S FIELD OFFICE	EA.	1	
AR151450	CLEARING AND GRUBBING	ACRE	20.24	
AR152410	UNCLASSIFIED EXCAVATION	C.Y.	66,286	
AR156510	SILT FENCE	L.F.	1,600	
AR901510	SEEDING	ACRE	20.24	
AR908510	MULCHING	ACRE	20.24	

### INDEX OF SHEETS

1. COVER
2. SAFETY PLAN
3. LOCATION OF OBSTRUCTIONS
4. EROSION & SEDIMENT CONTROL PLAN
5. CLEARING & SEEDING PLAN
6. BASELINE FOR EARTHWORK
- 7.-9. CROSS-SECTIONS


#### RECURRING SPECIAL PROVISIONS

The following RECURRING SPECIAL PROVISIONS indicated by an "X" are Applicable to this contract and are included by reference:

Check Sheet No.	Item No.		Page No.
1	AR101580	Refurbish 36" Beacon	155
2	AR106000	Apron Lighting	160
3	AR119000	Airport Obstruction Lighting (Not Included)	166
4	AR127000	Airport Navigaid Installation (Not Included)	167
X 5	AR160510	Engineer's Field Office	168
6	AR150560	Temporary Threshold	170
7	AR152540	Soil Stabilization Fabric	173
8	AR156000	Erosion Control	175
9	AR156513	Separation Fabric	180
10	AR156540	Riprap	182
11	AR201001	Bituminous Base Course - Method I	185
12	AR201002	Bituminous Base Course - Method II	193
13	AR201003	Bituminous Base Course - Method I, Superpave	209
14	AR201004	Bituminous Base Course - Method II, Superpave	217
15	AR201661	Clean & Seal Bituminous Cracks	230
16	AR201663	Sand Mix Crack Repair	233
17	AR201671	Crack Control Fabric	235
18	AR302000	Asphalt Treated Permeable Subbase	237
19	AR401001	Bituminous Surface Course - Method I	245
20	AR401002	Bituminous Surface Course - Method II	253
21	AR401003	Bituminous Surface Course - Method I, Superpave	269
22	AR401004	Bituminous Surface Course - Method II, Superpave	277
23	AR401640	Bituminous Pavement Grooving	290
24	AR401650	Bituminous Pavement Milling	293
25	AR401655	Butt Joint Construction	295
26	AR401800	Remove Bituminous Pavement	297
27	AR501001	Portland Cement Concrete - Pavement Method I	299
28	AR501002	Portland Cement Concrete - Pavement Method II	316
29	AR501003	Portland Cement Concrete - Pavement Method III	338
30	AR501115	Crack and Seal Pavement	362
31	AR501540	PCC Pavement Grooving	365
32	AR501550	PCC Pavement Milling	368
33	AR501900	Remove PCC Pavement	370
34	AR510500	Tie-down/Ground Rod	372
35	AR605000	Silicone Joint Sealing Filler	373

#### NOTE REGARDING SPECIAL PROVISIONS

THIS PROJECT HAS NO SPECIAL PROVISIONS. ALL WORK SHALL COMPLY WITH THE STANDARD SPECIFICATIONS FOR CONSTRUCTION ON AIRPORTS (JANUARY 1985) AS AMENDED BY THE SUPPLEMENTAL SPECIFICATIONS AND RECURRING SPECIAL PROVISIONS.

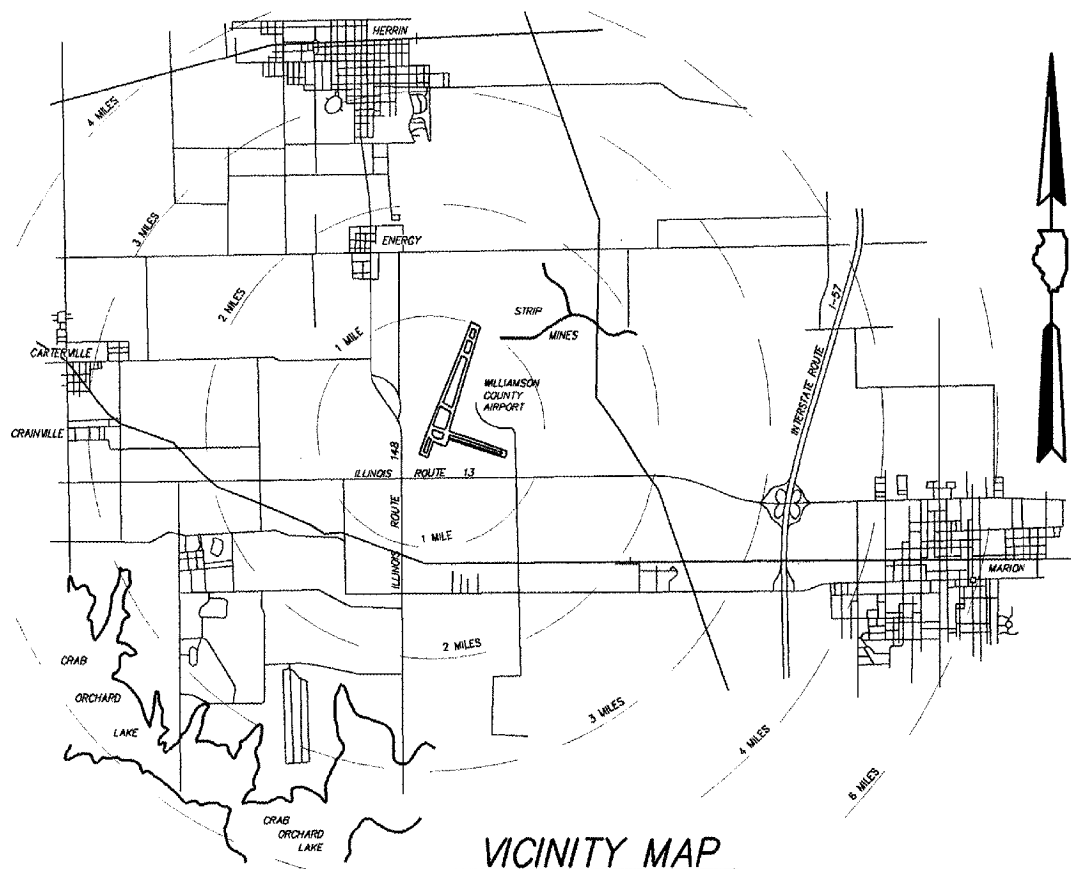

LATITUDE 37° 45' 15"  
LONGITUDE 89° 00' 45"  
ELEVATION 471.00

### BOARD MEMBERS

CHAIRMAN : CARL PLANINC

MEMBERS : BERNARD A. PAUL  
DARREN PULLEY  
RICHARD PISONI

SECRETARY : CRAIG PILLATSCH

AIRPORT MANAGER : DOUGLAS KIMMEL



EXPIRES : NOVEMBER 30, 2007

PLANS PREPARED BY:

 <b>CLARIDA &amp; ZIEGLER ENGINEERING COMPANY</b> P.O. Box 537, 308 South Court Street Marion, Illinois 62859	<b>WILLIAMSON COUNTY AIRPORT AUTHORITY</b>
REGISTERED PROFESSIONAL ENGINEER OF ILLINOIS NO. 24022 SUBMITTED: <i>H. Glenn Clarida</i> ENGINEER H. GLENN CLARIDA DATE: APRIL 16, 2007	APPROVED: <i>Carl Planinc</i> CHAIRMAN DATE: APRIL 16, 2007 APPROVED: <i>D. Kimmel</i> SECRETARY DATE: APRIL 16, 2007