

NOTES:

1. SEE DRAWING E-30 FOR ELECTRICAL SYMBOLS AND ABBREVIATIONS.
2. THE REMOVAL OF EXISTING UNDERPASS LUMINAIRES MUST INCLUDE THE REMOVAL OF ALL CABLES, CONDUIT, AND HARDWARE ASSOCIATED WITH THE EXISTING UNDERPASS LIGHTING. THE COST OF THIS WORK WILL NOT BE PAID FOR SEPARATELY, BUT WILL BE INCLUDED AS PART OF THE "REMOVAL OF UNDERPASS LUMINAIRE" PAY ITEM.
3. THE CONTRACTOR SHALL COORDINATE REMOVAL OF THE EXISTING UNDERPASS LUMINAIRES WITH THE STAGED BRIDGE CONSTRUCTION. EXISTING UNDERPASS LUMINAIRES SHALL REMAIN IN OPERATION UNTIL THEY MUST BE REMOVED FOR BRIDGE CONSTRUCTION. THE COST OF ANY TEMPORARY CABLING REQUIRED TO COMPLY WITH THIS REQUIREMENT IS INCLUDED IN THE COST OF THE ITEM "MAINTAIN LIGHTING SYSTEM."
4. PROPOSED UNDERPASS LUMINAIRES LOCATED ON AREAS OF THE BRIDGE CONSTRUCTED IN STAGE I SHALL BE ACTIVATED DURING STAGE II. THE COST OF ANY TEMPORARY CABLING REQUIRED TO COMPLY WITH THIS REQUIREMENT IS INCLUDED IN THE COST OF THE ITEM "MAINTAIN LIGHTING SYSTEM."

s:\projects\2011 us 41 - use to il 173 - bba\project work\disciplines\electrical\sheet\173-eh-light-43.dwg



EJM ENGINEERING, INC.
 411 South Wells Street Suite 1000
 Chicago, Illinois 60607

FILE NAME	USER NAME = rsonson	DESIGNED - RAS	REVISED -
		DRAWN - BHH	REVISED -
	PLOT SCALE = 40.0000' / IN.	CHECKED - MKR	REVISED -
	PLOT DATE = 6/18/2012	DATE - 6/19/2012	REVISED -

**STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION**

**I-94 AT ROSECRANS ROAD
 TOLLWAY UNDERPASS LIGHTING REMOVAL PLAN**

SCALE: 1"=20' SHEET NO. 43 OF 53 SHEETS STA. TO STA.

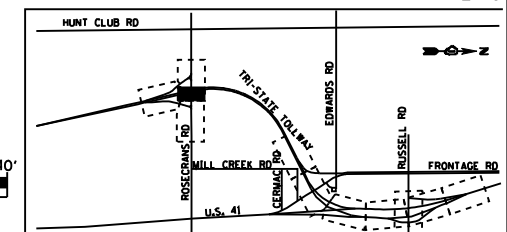

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
94	49-1-R-1	LAKE	677	403
CONTRACT NO. 60L77				
ILLINOIS FED. AID PROJECT				