




DATE	
BY	
CHECKED	
IN CHARGE	
PROJECT	
NO.	
SCALE	
DATE	

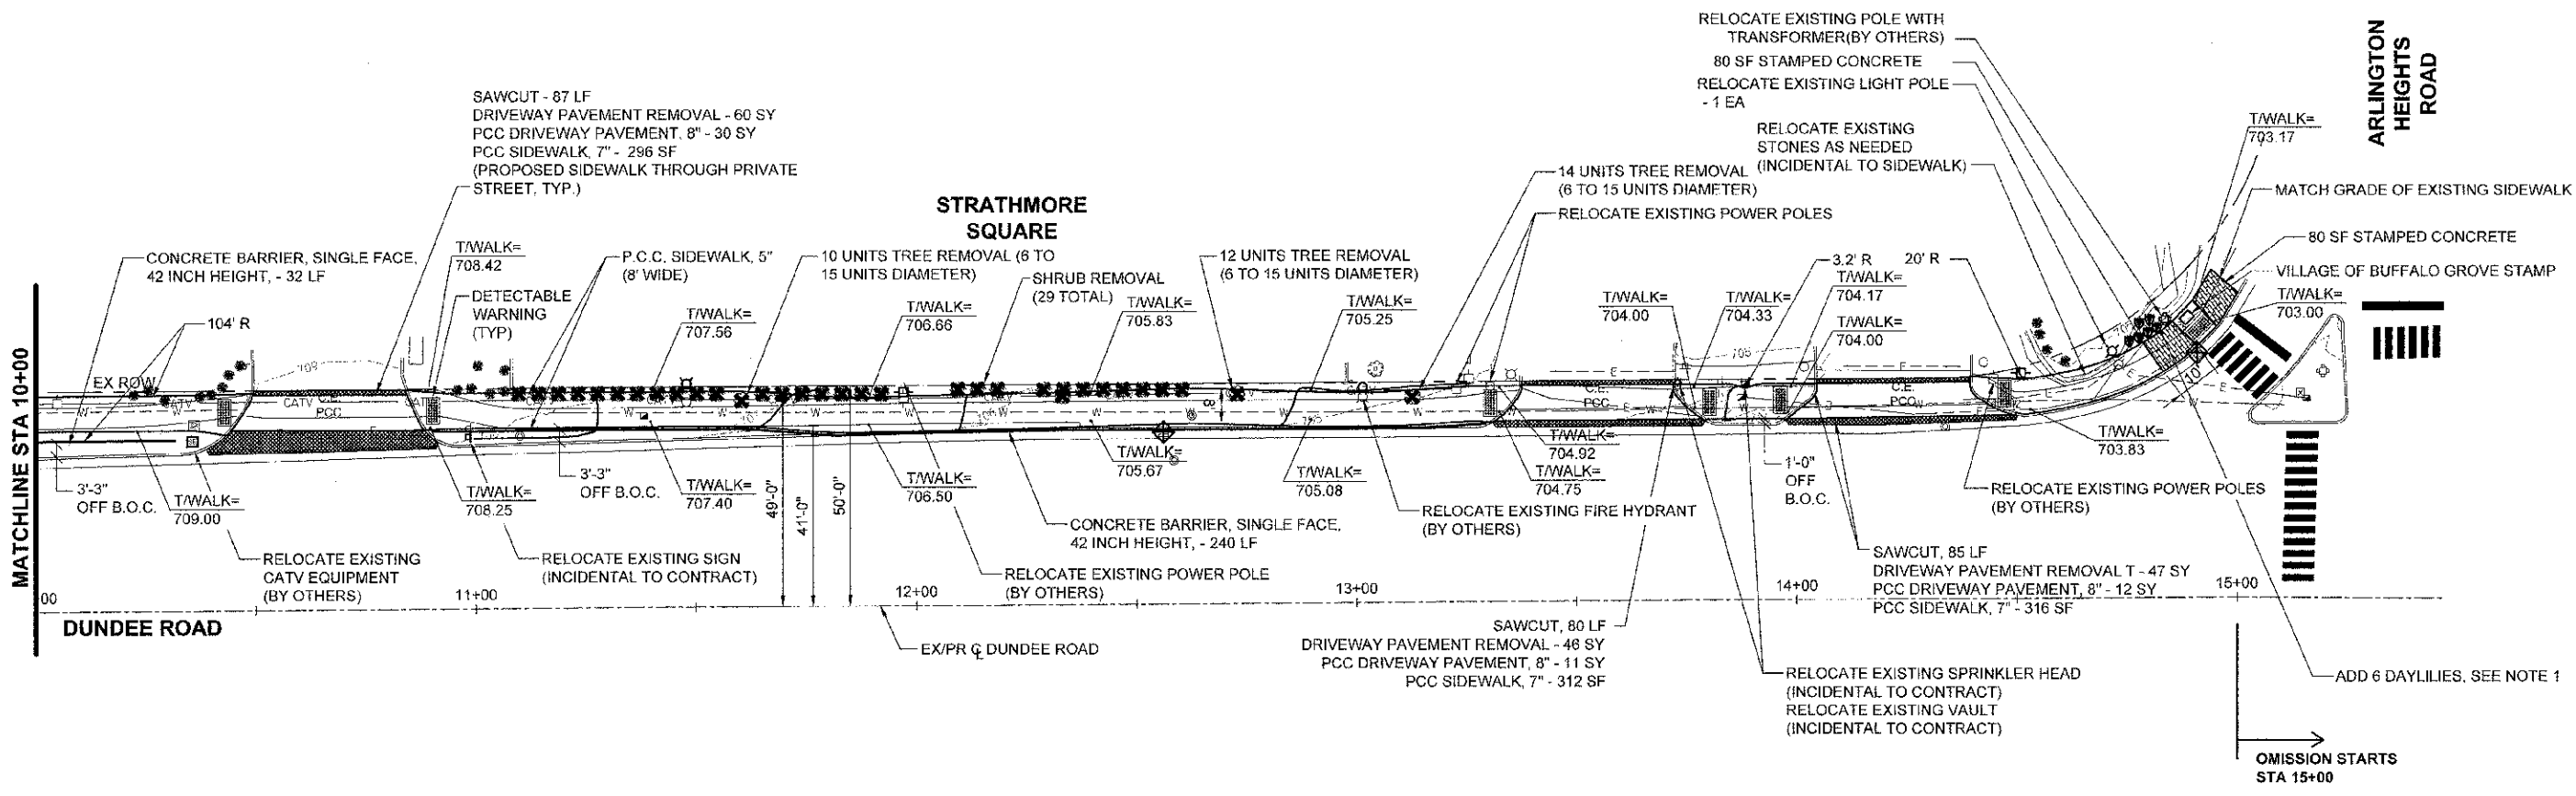

DATE	
BY	
CHECKED	
IN CHARGE	
PROJECT	
NO.	
SCALE	
DATE	

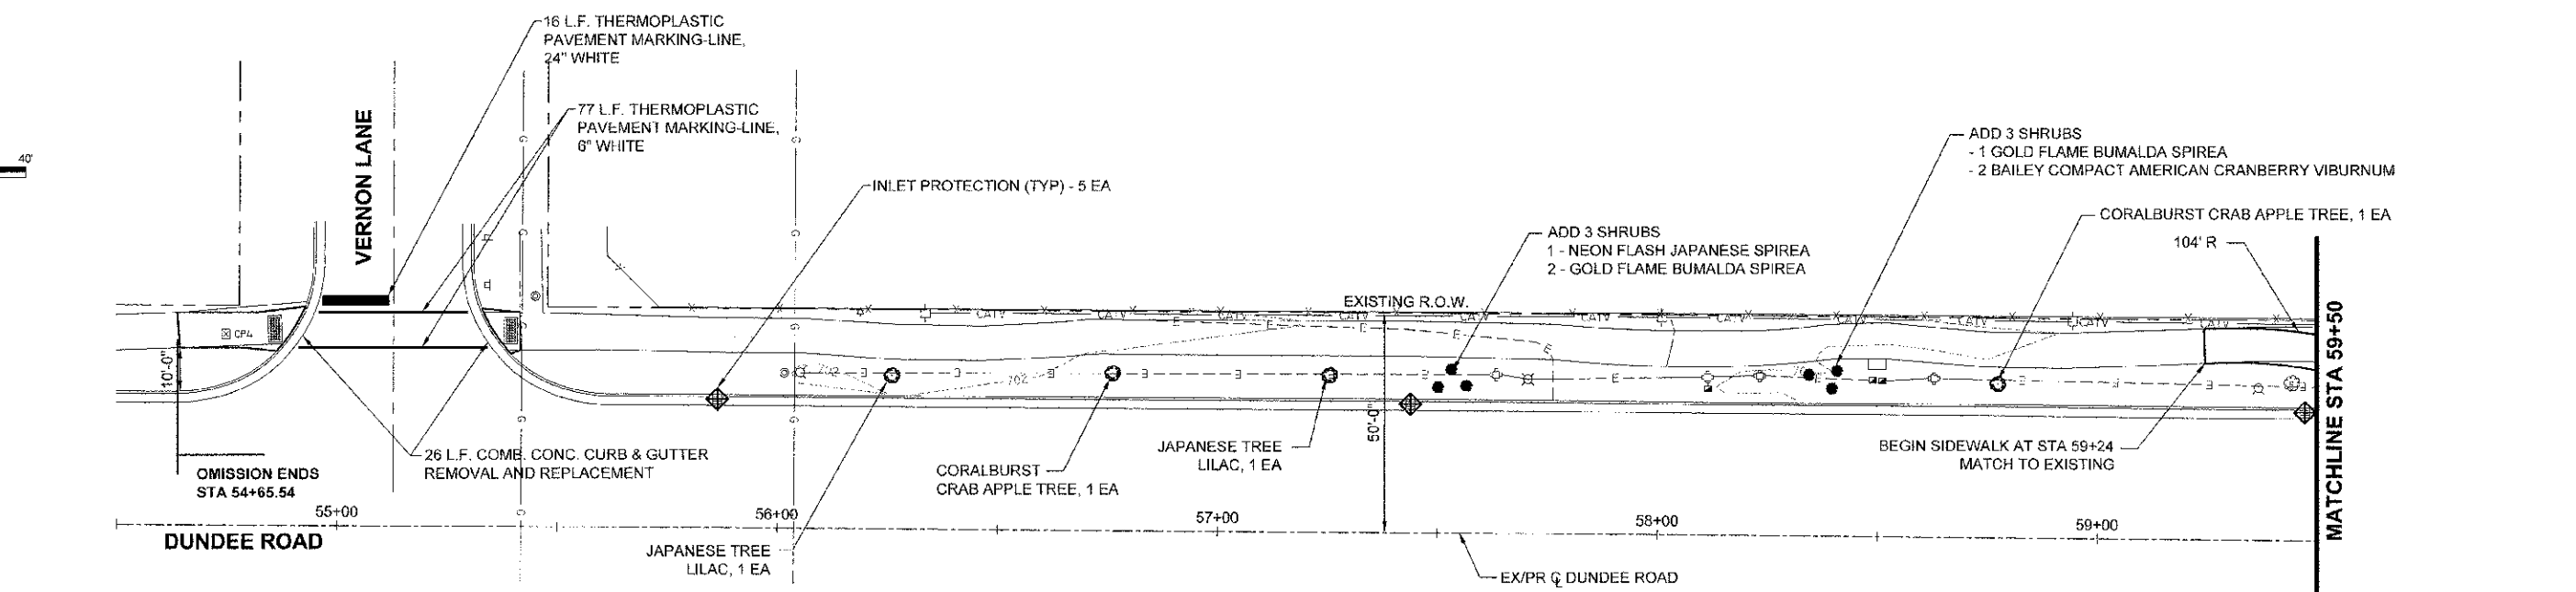

- NOTES:**
- UTILIZE EQUAL QUANTITIES OF THE FOLLOWING FOR DAY LILIES:
 HEMEROCALLIS HAPPY RETURNS (HAPPY RETURNS DAYLILY), 1-GALLON CONTAINER
 HEMEROCALLIS CHICAGO APACHE (CHICAGO APACHE DAYLILY), 1 GALLON CONTAINER
 HEMEROCALLIS ROSY RETURNS (ROSY RETURNS DAYLILY), 1-GALLON CONTAINER
 - THE GENERAL CONTRACTOR IS REQUIRED TO HIRE AN ENVIRONMENTAL FIRM WITH AT LEAST FIVE (5) DOCUMENTED LEAKING UNDERGROUND STORAGE TANK CLEANUPS OR THAT IS PRE-QUALIFIED IN HAZARDOUS WASTE BY THE DEPARTMENT TO REMEDIATE THE SOIL CONTAMINATION AND MONITOR FOR WORKERS PROTECTION.

QUANTITIES
 135 SF DETECTABLE WARNING
 2500 SF SIDEWALK REMOVAL
 3458 SF PCC SIDEWALK, 5"
 924 SF PCC SIDEWALK, 7"