

CONTRACT NO. 60R2Z
 COUNTY SURVEY NO.
 SECTION
 210 (021832185)-1
 COOK
 TO STA.
 STA.
 22
 4
 ILLINOIS DEPT. OF TRANSPORTATION
 FROM US 12 (RAND ROAD) TO DEVON AVE.


LEGEND:

- ① EXISTING COMBINATION CURB & GUTTER, B-612
- ② EXISTING P.C.C. BASE COURSE, 9"
- ③ PROPOSED BITUMINOUS SURFACE REMOVAL, 1 1/2" *
- ④ EXISTING BITUMINOUS OVERLAY ± 3 3/4"
- ⑤ EXISTING BITUMINOUS OVERLAY AFTER MILLING *
- ⑥ PROPOSED BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX "D", NTO, 1 1/2" *


* RESURFACING IS LIMITED TO FROM STA. 199+88 TO STA. 217+79

MIXTURE USES	AC/PG	RAP % MAX	DESIGN AIR Voids
BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX "D", NTO, 1 1/2"	PG 64-22	10	4% @ 70 CTR
BITUMINOUS REPLACEMENT OVER PATCHES, IL-191M	PG 64-22	15	4% @ 70 CTR
CLASS II PATCHES, BINDER IL-191M, 9"	PG 64-22	15	4% @ 70 CTR

THE UNIT WEIGHT USED TO CALCULATE ALL BITUMINOUS CONCRETE SURFACE MIXTURES IS 112.195/STYIN

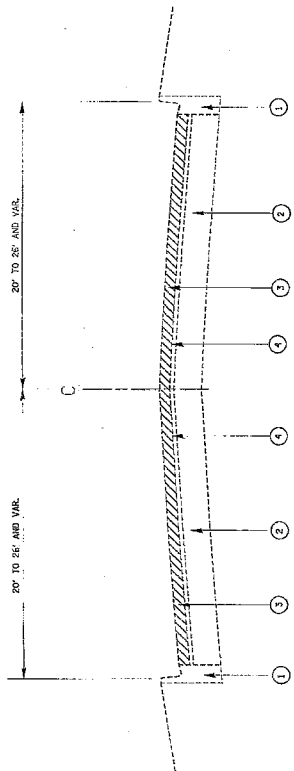

DES PLAINES RIVER ROAD
 EXISTING TYPICAL SECTION
 FROM STA. 27+62 TO STA. 132+56
 AND
 FROM STA. 199+88 TO STA. 217+84

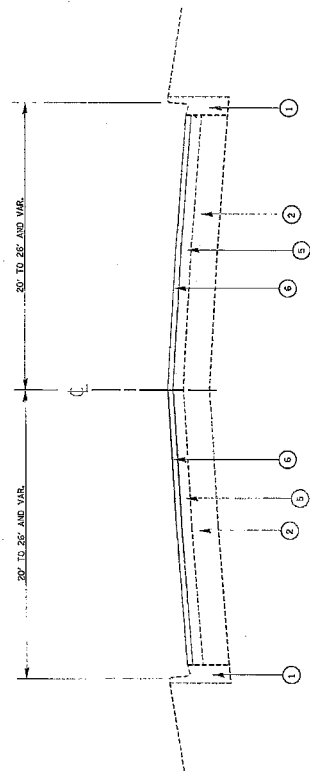

DES PLAINES RIVER ROAD
 PROPOSED TYPICAL SECTION
 FROM STA. 27+62 TO STA. 132+56
 AND
 FROM STA. 199+88 TO STA. 217+79

NOTE: OMISSION BETWEEN STA. 132+56 TO STA. 199+88 AND STA. 211+88.57 TO STA. 212+94.57

REVISIONS	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
 DES PLAINES RIVER ROAD
 FROM US 12 (RAND ROAD) TO DEVON AVE.
 TYPICAL SECTIONS &
 BITUMINOUS MIXTURE REQUIREMENTS
 DRAWN BY: _____
 SCALE: VERT. _____
 HORIZ. _____
 DATE: _____

Rev. Sheet 7-18-96