F.A.S. ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET
801	03-00101-00-RS	LAWRENCE	5	2
STA. CONT. # 95418		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	PROJECT		

SUMMARY OF QUANTITIES

QTY	UNIT	ITEM	I000 CODE NO
6,360	FOOT	SHORT-TERM PAVEMENT MARKING REMOVAL	XX003140
4,468	TON	LEVELING BINDER (MACHINE METHOD), SUPERPAVE N50	X4066765
11,432	TON	BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX "C", N50	X4066414
279	CU YD	FURNISHED EXCAVATION	20400800
296	CU YD	TRENCH BACKFILL	20800150
0.3	ACRE	SEEDING, CLASS 2 (SPECIAL)	25001000
50	TON	STONE DUMPED RIPRAP, CLASS A4	28100807
100	TON	AGGREGATE SURFACE COURSE, TYPE B	40200800
7,771	GALLON	BITUMINOUS MATERIALS (PRIME COAT)	40600100
155	TON	AGGREGATE (PRIME COAT)	40600300
767	SQ YD	BITUMINOUS SURFACE REMOVAL 1 1/4"	44000005
511	SQ YD	BITUMINOUS SURFACE REMOVAL 2"	44000007
50	SQ YD	CLASS D PATCHES, TYPE I, 8 INCH	44201737
100	SQ YD	CLASS D PATCHES, TYPE II, 8 INCH	44201741
100	SQ YD	CLASS D PATCHES, TYPE III, 8 INCH	44201745
100	SQ YD	CLASS D PATCHES, TYPE IV, 8 INCH	44201747
77,711	SQ YD	AREA REFLECTIVE CRACK CONTROL TREATMENT, SYSTEM A	44300300
4,200	TON	AGGREGATE SHOULDERS, TYPE B	48101200
48	FOOT	PIPE CULVERTS, CLASS C, TYPE 1 24"	542C0229
134	FOOT	PIPE CULVERTS, CLASS C, TYPE 2 24"	542C1069
112	FOOT	PIPE CULVERTS, CLASS C, TYPE 2 30"	542C1075
62	FOOT	PIPE CULVERTS, CLASS C, TYPE 2 36"	542C1081
116	FOOT	PIPE CULVERTS, CLASS C, TYPE 2 60"	542C1105
48	FOOT	PIPE CULVERTS, CLASS C, TYPE 1 EQUIVALENT ROUND-SIZE 48"	542C5503
146	FOOT	PIPE CULVERTS, CLASS D, TYPE 1 15"	542D0220
50	FOOT	PIPE CULVERTS, CLASS D, TYPE 1 24"	542D0229
44	FOOT	STEEL PLATE BEAM GUARD RAIL, TYPE B	63000005 *
32	FOOT	STEEL PLATE BEAM GUARD RAIL, ATTACHED TO STRUCTURES	63000025 *
4	EACH	TRAFFIC BARRIER TERMINAL TYPE 1, SPECIAL (TANGENT)	63100167 *
3	CAL MO	ENGINEER'S FIELD LABORATORY	67000600
1	L SUM	TRAFFIC CONTROL AND PROTECTION, STANDARD 701306	70100460
1	L SUM	TRAFFIC CONTROL AND PROTECTION, STANDARD 701336	70100600
1	L SUM	TRAFFIC CONTROL AND PROTECTION	70101700
6,360	FOOT	SHORT-TERM PAVEMENT MARKING	70300100
36,693	FOOT	PAINT PAVEMENT MARKING-LINE 4"	78001110 *
4	EACH	TERMINAL MARKER - DIRECT APPLIED	78201000
100	SQ FT	SIGN PANEL - TYPE 1	72000100
504	FOOT	METAL POST - TYPE A	72900100
1	L SUM	MOBILIZATION	67100100

* SPECIALTY ITEMS

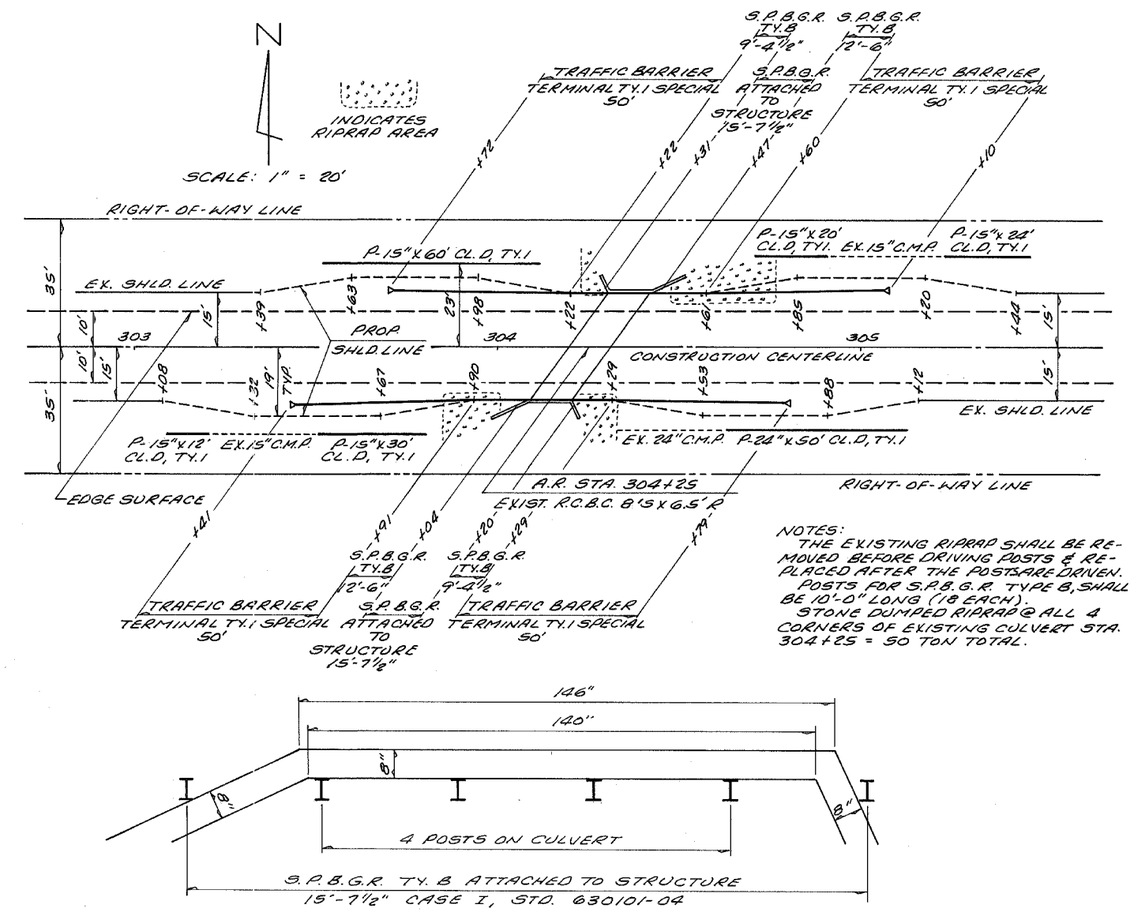

PLAN VIEW OF RIGHT HEADWALL

DETAIL OF SHOULDER WIDENING & GUARD RAIL STA. 304+25

BITUMINOUS SURFACE REMOVAL

BRIDGE STA. 42+29 — 445 S.Y.	1½" DEPTH	FROM WEST END BRIDGE TO 100' WEST & FROM EAST END BRIDGE TO 100' EAST (DO NOT REMOVE ON BRIDGE)
BRIDGE STA. 161+99 — 511 S.Y.	2" DEPTH	FROM 100' WEST OF WEST END OF BRIDGE TO 100' EAST OF EAST END OF BRIDGE. (INCLUDES ACROSS BRIDGE)
INTERSECTION @ RT. 33 — 322 S.Y.	1½" DEPTH	FROM WEST EDGE OF RT. 33 PAVEMENT TO 100' WEST

BITUMINOUS SURFACE REMOVAL 1½" TOTAL = 767 S.Y.
BITUMINOUS SURFACE REMOVAL 2" TOTAL = 511 S.Y.

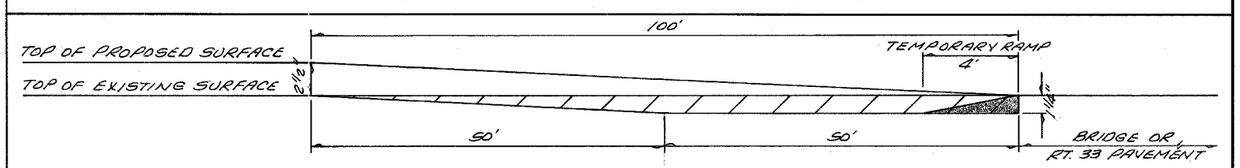

DETAIL OF SURFACE REMOVAL & TEMPORARY RAMPS AT BRIDGE STA. 42+29 & RT. 33