


CONSTRUCTION PLANS FOR SALEM LECKRONE AIRPORT SALEM, MARION COUNTY, ILLINOIS REHABILITATE T-HANGER TAXIWAYS

THIS PROJECT SHALL CONSIST OF BITUMINOUS MILLING, RESURFACING WITH BITUMINOUS SURFACE COURSE,
CONSTRUCTING STORM SEWER, CONSTRUCTING TRENCH DRAINS, EARTHWORK GRADING, AND OTHER MISCELLANEOUS WORK.

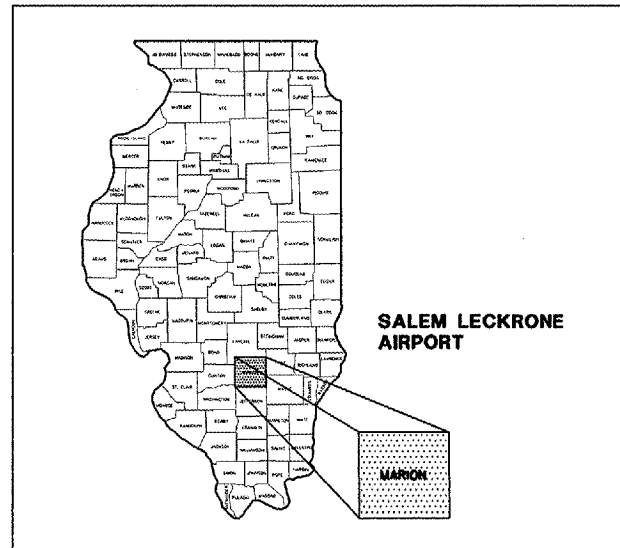


LOCATION MAP

ILLINOIS PROJECT - SLO-3602
AIP PROJECT NO - 3-17-0089-B11
DATE: JUNE 27, 2006

INDEX TO SHEETS

- 1 COVER SHEET, INDEX TO SHEETS, AND SUMMARY OF QUANTITIES
- 2 SAFETY PLAN
- 3 EXISTING SITE AND DEMOLITION PLAN
- 4 SITE LAYOUT AND GRADING PLAN
- 5 TYPICAL SECTIONS & MISCELLANEOUS DETAILS

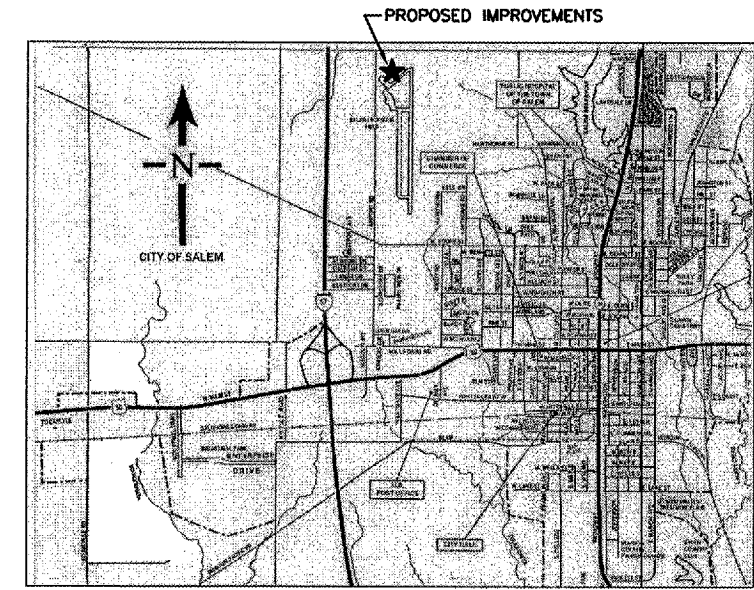

VICINITY MAP

SUMMARY OF QUANTITIES

ITEM NO.	DESCRIPTION	UNIT	AWARDED QUANTITY			AS-BUILT QUANTITY
			FED/STATE/LOCAL	FED/LOCAL	TOTAL	
AR152410	UNCLASSIFIED EXCAVATION	C.Y.	170		170	
AR156540	RIPRAP	S.Y.	22.2		22.2	
AR156512	BALES	EACH	8		8	
AR401610	BITUMINOUS SURFACE COURSE	TON	319	195	514	
AR401650	BITUMINOUS PAVEMENT MILLING	S.Y.	1895	1739	3634	
AR401900	REMOVE BITUMINOUS PAVEMENT	S.Y.	277		277	
AR603510	BITUMINOUS TACK COAT	GAL.	250	180	430	
AR751001	TRENCH DRAIN	L.F.	226		226	
AR620520	PAVEMENT MARKING - WATERBORNE	S.F.	461		461	
AR701008	8" PVC STORM SEWER	L.F.	175		175	
AR705610	CONCRETE HEADWALL FOR UNDERDRAIN	EACH	2		2	
AR751411	INLET - TY A	EACH	1		1	
AR901510	SEEDING	ACRE	0.15		0.15	
AR908510	MULCHING	ACRE	0.15		0.15	

LATITUDE: 38°38'34"
LONGITUDE: 88°57'51"
ELEVATION: 573 M.S.L.

STS
STS Consultants
2524 South Broadway
P.O. BOX 850
Salem, Illinois 62881
Ph(618)548-3500
FAX(618)548-5246
IL Design Firm Reg.
No. 184-001518
www.stsconsultants.com



SUBMITTED BY *Michael R. Quandt*
DATE June 27, 2006

SALEM LECKRONE
AIRPORT
SALEM, ILLINOIS

APPROVED *Michael R. Quandt*
CHAIRMAN, SALEM AIRPORT AUTHORITY

DATE 6-27-06