


ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NUMBER
FAP 326	107 CRC-PP-3	KANE	13	1

FOR INDEX OF SHEETS SEE SHEET 2

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
DISTRICT ONE

CONTRACT NO. 62943

D-91-182-05

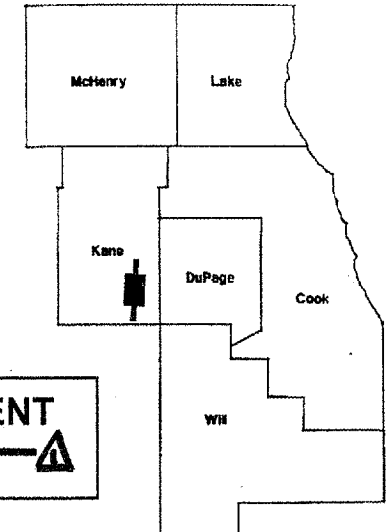

NORTHBOUND IMPROVEMENT
ENDS STA. 212+91

LOCATION OF IMPROVEMENT INDICATED THUS:

NORTHBOUND IMPROVEMENT
BEGINS STA. 0+00

IMPROVEMENT IS
LOCATED IN THE VILLAGE
OF SUGAR GROVE

PROPOSED HIGHWAY PLANS

FAP 326: IL 47
GALENA BLVD. TO NORTH OF I-88
SECTION: 107 CRC-PP-3
KANE COUNTY
C-91-182-05

OMISSIONS: NORTHBOUND
STA. 0+00 TO STA. 35+62
STA. 134+79 TO STA. 178+34
STA. 194+17 TO STA. 195+83
STA. 212+15 TO STA. 212+91

OMISSIONS: SOUTHBOUND
STA. 0+00 TO STA. 0+76
STA. 16+86 TO STA. 18+52
STA. 34+74 TO STA. 78+29
STA. 207+40 TO STA. 213+54


SOUTHBOUND IMPROVEMENT
BEGINS STA. 0+00

TRAFFIC DATA:

IL 47:
GALENA BLVD TO BLISS RD
SPEED LIMIT = 45 MPH
2002 ADT = 19,700

BLISS RD. TO SEAVEY RD
SPEED LIMIT = 55 MPH
2002 ADT = 14,000

SOUTHBOUND IMPROVEMENT
ENDS STA. 213+54

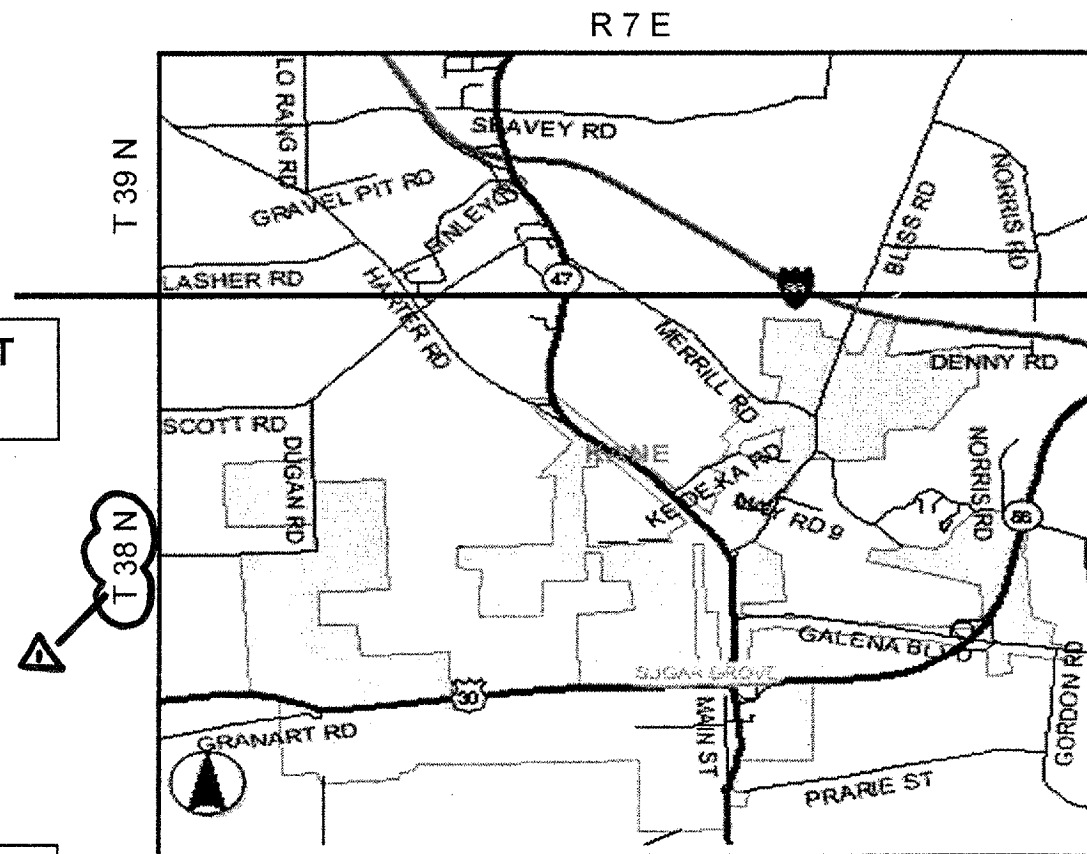

SUGAR GROVE TOWNSHIP

GROSS LENGTH OF IMPROVEMENT = 21,255 FEET = 4.03 MILES
NET LENGTH OF IMPROVEMENT = 13,101 FEET = 2.48 MILES

CONTRACT NO. 62943

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
SUBMITTED: May 27, 20 05
Diane O'Keefe / AP
DEPUTY DIRECTOR OF HIGHWAYS, REGION ENGINEER
July 1, 20 05
Mike Hene / AP
ENGINEER OF DESIGN AND ENVIRONMENT
July 1, 20 05
Victor Modder / AP
DIRECTOR, DIVISION OF HIGHWAYS

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

J.U.L.I.E.: JOINT UTILITY LOCATION
INFORMATION FOR EXCAVATION
(800) 892-0123

DISTRICT ONE - DESIGN - PLAN PREPARATION ENGINEER:
KEN ENG / ROBERT BORO (847) 705-4178

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NUMBER
FAP 326	107 CRC-PP-3	KANE	13	2

CONTRACT NO. 62943

INDEX OF SHEETS

STATE STANDARDS

<u>SHEET NO.</u>	<u>DESCRIPTION</u>	<u>STANDARDS</u>	<u>DESCRIPTION</u>
1	TITLE SHEET	420001-06	PAVEMENT JOINTS
2	INDEX OF SHEETS STATE STANDARDS	421101-05	7.2 m (24') FOR CRC PAVEMENT
3	GENERAL NOTES	421001-01	BAR REINFORCEMENT FOR CRC PAVEMENT
4	SUMMARY OF QUANTITIES	442001-02	CLASS A PATCHES
5 - 6	TYPICAL CROSS SECTIONS	701301-02	LANE CLOSURE 2L, 2W SHORT TIME OPERATIONS
7 - 11A	PATCHING SCHEDULES	701421-01	LANE CLOSURE, MULTILANE, DAY OPERATIONS ONLY, FOR SPEEDS ≥ 45 MPH TO 55 MPH
12	DISTRICT ONE TYPICAL PAVEMENT MARKINGS	701701-04	URBAN LANE CLOSURE, MULTILANE INTERSECTION
13	TRAFFIC CONTROL AND PROTECTION FOR SIDE ROADS, INTERSECTIONS AND DRIVEWAYS	702001-05	TRAFFIC CONTROL DEVICES
		780001-01	TYPICAL PAVEMENT MARKINGS

BITUMINOUS MIXTURE REQUIREMENT:

<u>MIXTURE</u>	<u>AC TYPE</u>	<u>THICKNESS</u>	<u>MAX RAP (%)</u>	<u>AIR VOID (%)</u>
BITUMINOUS CONCRETE SURFACE COURSE SUPERPAVE, MIX D, N70	PG 64-22	2" (TOP)	10%	4% @ 70 GYR.
CLASS D PATCHES, IL 19mm	PG 64-22	6" (BOTTOM)	15%	4% @ 70 GYR.

ILLINOIS DEPARTMENT OF TRANSPORTATION

INDEX OF SHEETS
STATE STANDARDS

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NUMBER
FAP 326	107 CRC-PP-3	KANE	13	3

CONTRACT NO. 62943

GENERAL NOTES

BEFORE STARTING ANY EXCAVATION, THE CONTRACTOR SHALL CALL J.U.L.I.E. AT 800-892-0123 FOR FIELD LOCATIONS OF BURIED ELECTRIC, TELEPHONE AND GAS UTILITIES (48 HOURS NOTIFICATION IS REQUIRED).

THE CONTRACTOR WILL NOT BE ALLOWED TO SET UP A YARD OR FIELD OFFICE ON STATE PROPERTY WITHOUT WRITTEN PERMISSION FROM THE DEPARTMENT.

IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO VERIFY ALL DIMENSIONS AND CONDITIONS EXISTING IN THE FIELD PRIOR TO CONSTRUCTION AND ORDERING OF MATERIALS.

THE CONTRACTOR SHALL CONTACT THE DISTRICT ONE TRAFFIC CONTROL SUPERVISOR AT (847) 705-4470 A MINIMUM OF 72 HOURS IN ADVANCE OF BEGINNING WORK.

THE CONTRACTOR SHALL BE REQUIRED TO PROVIDE ACCESS TO ABUTTING PROPERTY AT ALL TIMES DURING THE CONSTRUCTION OF THIS PROJECT.

DO NOT SCALE PLANS FOR CONSTRUCTION DIMENSIONS.

THE CONTRACTOR SHALL COORDINATE CONSTRUCTION ACTIVITIES WITH UTILITY COMPANIES.

WHEN ARTIFICIAL LIGHTING IS USED IN NIGHT OPERATIONS, THE CONTRACTOR SHALL EXERCISE THE UPMOST PRECAUTIONS IN PREVENTING ADVERSE VISIBILITY TO THE MOTORING PUBLIC AND ADJOINING RESIDENTIAL AREAS.

ANY PAVEMENT MARKINGS OBLITERATED BY THE WORK SHALL BE REPLACED AND PAID FOR IN KIND. BEFORE BEGINNING WORK, THE CONTRACTOR SHALL RETAIN AND RECORD (FOR FUTURE REFERENCE), ALL EXISTING PAVEMENT MARKING LINES AND RAISED REFLECTIVE PAVEMENT MARKERS IN ORDER THAT THESE LOCATIONS CAN BE RE-ESTABLISHED FOR STRIPING. EXACT LOCATIONS OF ALL STRIPING SHALL BE AS DIRECTED BY THE ENGINEER.

THESE PLANS HAVE BEEN PREPARED FROM NOTES RECEIVED FROM FIELD MAINTENANCE ENGINEERS.

THE ENGINEER SHALL CONTACT RICHARD TOLLEFSON AT THE ST. CHARLES MAINTENANCE YARD, (630) 584-4360, REGARDING PATCHING LOCATIONS.

THE ENGINEER SHALL OBTAIN APPROVAL FROM THE DISTRICT ONE BUREAU CHIEF OF MAINTENANCE FOR ANY PROPOSED REVISIONS IN THE SCHEDULED PAVEMENT PATCHING LOCATIONS.

THE ENGINEER SHALL CONTACT DON CHIARUGI, TRAFFIC FIELD ENGINEER, AT (847) 741-9857 TWO (2) WEEKS PRIOR TO THE START OF THIS PROJECT SO THAT THE EXACT STATIONING OF NO PASSING ZONES AND OTHER PERMANENT PAVEMENT MARKINGS MAY BE ESTABLISHED.

ILLINOIS DEPARTMENT OF TRANSPORTATION

GENERAL NOTES

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NUMBER
FAP 326	107 CRC-PP-3	KANE	13	4

CONTRACT NO. 62943

SUMMARY OF QUANTITIES

CODE NO	ITEM	UNIT	TOTAL QUANTITIES	CONSTRUCTION TYPE CODE					
				URBAN J000	KANE COUNTY				
				IL 47-NB/SB					
44200525	CLASS A PATCHES, TYPE I, 8 INCH	SQ YD	23.3	23.3					
<i>44201737</i>	<i>CLASS D PATCHES, TYPE I, 8 INCH</i>	<i>SQ YD</i>	<i>29.3</i>	<i>29.3</i>					
44200529	CLASS A PATCHES, TYPE II, 8 INCH	SQ YD	692.7	692.7					
<i>44201741</i>	<i>CLASS D PATCHES, TYPE II, 8 INCH</i>	<i>SQ YD</i>	<i>974.7</i>	<i>974.7</i>					
44200533	CLASS A PATCHES, TYPE III, 8 INCH	SQ YD	900	900					
<i>44201745</i>	<i>CLASS D PATCHES, TYPE III, 8 INCH</i>	<i>SQ YD</i>	<i>704</i>	<i>704</i>					
44200535	CLASS A PATCHES, TYPE IV, 8 INCH	SQ YD	893.3	893.3					
<i>44201747</i>	<i>CLASS D PATCHES, TYPE IV, 8 INCH</i>	<i>SQ YD</i>	<i>527.3</i>	<i>527.3</i>					
44213000	PATCHING REINFORCEMENT	SQ YD	2509.3	2509.3					
44213200	SAW CUTS	FOOT	12,225	12,225					
67000400	ENGINEER'S FIELD OFFICE, TYPE A	CAL MO	4	4					
67100100	MOBILIZATION	L SUM	1	1					
<i>70102635</i>	<i>TRAFFIC CONTROL & PROTECTION, STD. 701701</i>	<i>L SUM</i>	<i>1</i>	<i>1</i>					
70100310	TRAFFIC CONTROL & PROTECTION, STANDARD	L SUM	1	1					
<i>70103815</i>	<i>TRAFFIC CONTROL SURVEILLANCE</i>	<i>CAL DAY</i>	<i>7</i>	<i>7</i>					
* 78008210	POLYUREA PAVEMENT MARKING TYPE I - LINE 4"	FOOT	6600	6600					
* 78100100	RAISED REFLECTIVE PAVEMENT MARKER	EACH	200	200					
X0322467	TEMPORARY INFORMATION SIGNING FOR LANE CLOSURE	SQ FT	96	96					
Z0032470	JOINT SEALER	FOOT	7250	7250					
Z0075300	TIE BARS	EACH	2344	2344					

ILLINOIS DEPARTMENT OF
TRANSPORTATION
SUMMARY OF QUANTITIES

Rev. 7-25-05

*SPECIALTY ITEMS

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NUMBER
FAP 326	107 CRC-PP-3	KANE	13	7

CLASS A: PAVEMENT PATCHING SCHEDULE
Northbound ILLINOIS ROUTE 47
GALENA BLVD. TO NORTH OF I-88 BRIDGE (SEAVEY RD.)

PATCH LOCATION NUMBER	STATION	LANE 1			LANE 2		
		SIZE (L X W)	AREA (SQ. YD.)	TYPE	SIZE (L X W)	AREA (SQ. YD.)	TYPE
	0+00	GALENA BLVD.-START OF OMISSION/LIMITS					
	23+95	CENTERLINE-BLISS RD.					
	35+62	START OF CRC PAVEMENT-END OF OMISSION					
1	36+74				5 x 12	6.7	II
2	37+74	5 x 12	6.7	II			
3	38+09				20 x 6	13.3	II
4	38+78				15 x 6	10.0	II
5	40+46				15 x 6	10.0	II
6	41+91				29 x 6	19.3	III
7	45+29	15 x 12	20.0	III			
8	46+59				25 x 6	16.7	III
9	48+39				15 x 12	20.0	III
10	48+62				30 x 6	20.0	III
11	49+32				18 x 6	12.0	II
12	49+98				38 x 6	25.3	IV
	52+16	CENTERLINE-KEDEKA RD.					
13	53+11				10 x 6	6.7	II
14	53+55				34 x 6	22.7	III
15	54+22				22 x 6	14.7	II
16	55+29				56 x 6	37.3	IV
17	56+02				18 x 6	12.0	II
18	56+78				50 x 6	33.3	IV
19	57+95				34 x 6	22.7	III
20	60+22				12 x 12	16.0	III
21	68+67				12 x 12	16.0	III
22	71+48				20 x 12	26.7	IV
23	73+12				11 x 6	7.3	II
24	73+43				8 x 6	5.3	II
25	76+32				10 x 6	6.7	II
26	78+87				25 x 6	16.7	III
27	79+37				10 x 6	6.7	II
28	79+52				10 x 6	6.7	II
29	80+18				22 x 12	29.3	IV
30	81+17				15 x 12	20.0	III
	81+49	CENTERLINE-S. ENTRANCE WAUBONSEE DR.					
31	81+82				12 x 6	8.0	II
32	82+10				8 x 6	5.3	II

CLASS A: PAVEMENT PATCHING SCHEDULE CONTRACT 62943
Northbound ILLINOIS ROUTE 47
GALENA BLVD. TO NORTH OF I-88 BRIDGE (SEAVEY RD.)

PATCH LOCATION NUMBER	STATION	LANE 1			LANE 2		
		SIZE (L X W)	AREA (SQ. YD.)	TYPE	SIZE (L X W)	AREA (SQ. YD.)	TYPE
33	82+52				42 x 6	28.0	IV
34	83+03	13 x 12	17.3	III	13 x 12	17.3	III
35	83+24	16 x 12	21.3	III			
36	83+45				21 x 12	28.0	IV
37	83+54	10 x 6	6.7	II			
38	83+95				18 x 12	24.0	III
39	84+19				18 x 6	12.0	II
40	84+66				12 x 6	8.0	II
41	85+88				50 x 6	33.3	IV
42	86+76				8 x 6	5.3	II
43	87+52				9 x 6	6.0	II
44	88+69				20 x 6	13.3	II
45	89+37				14 x 12	18.7	III
46	89+95	10 x 12	13.3	II			
47	90+50				34 x 6	22.7	III
48	91+25	12 x 12	16.0	III			
49	91+42	29 x 12	38.7	IV			
50	92+11				8 x 6	5.3	II
51	92+55	11 x 12	14.7	II	11 x 12	14.7	II
52	92+71				7 x 6	4.7	I
53	92+78	12 x 12	16.0	III			
54	93+08	27 x 12	36.0	IV			
55	94+10	19 x 12	25.3	IV			
56	94+34				21 x 6	14.0	II
57	94+37	43 x 12	57.3	IV			
58	94+71				21 x 6	14.0	II
59	95+79	19 x 12	25.3	IV			
60	96+85				21 x 6	14.0	II
61	97+62	11 x 12	14.7	II	11 x 12	14.7	II
62	98+05	39 x 12	52.0	IV			
63	98+35				5 x 12	6.7	II
	100+10	CENTERLINE-HARTER RD.					
64	101+23	16 x 12	21.3	III			
65	103+33	11 x 6	7.3	II			
66	104+64	18 x 12	24.0	III			
67	106+40	12 x 12	16.0	III			
68	106+67	12 x 12	16.0	III			

CLASS "A" PATCHING
(BOTH SCHEDULES)

ILLINOIS DEPARTMENT OF TRANSPORTATION
PAVEMENT PATCHING SCHEDULE

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NUMBER
FAP 326	107 CRC-PP-3	KANE	13	8

CLASS A: PAVEMENT PATCHING SCHEDULE
 Northbound ILLINOIS ROUTE 47
 GALENA BLVD. TO NORTH OF I-88 BRIDGE (SEAVEY RD.)

PATCH LOCATION NUMBER	STATION	LANE 1			LANE 2		
		SIZE (L X W)	AREA (SQ. YD.)	TYPE	SIZE (L X W)	AREA (SQ. YD.)	TYPE
69	106+72				12 x 12	16.0	III
70	108+69	13 x 12	17.3	III			
71	109+41	8 x 6	5.3	II			
72	109+61	14 x 6	9.3	II			
73	110+40	20 x 12	26.7	IV			
74	114+95	7 x 6	4.7	I			
75	115+70				16 x 12	21.3	III
76	116+11				8 x 6	5.3	II
77	117+08	10 x 6	6.7	II			
78	122+78	20 x 12	26.7	IV			
79	125+92	15 x 12	20.0	III			
	127+49	CENTERLINE-NORTH ENTRANCE-WAUBONSEE COLLEGE					
80	128+67				6 x 12	8.0	II
	134+79	END OF CRC PAVEMENT-START OF OMISSION					

CLASS "A" PATCHING

CLASS D: PAVEMENT PATCHING SCHEDULE **CONTRACT 62943**
 Northbound ILLINOIS ROUTE 47
 GALENA BLVD. TO NORTH OF I-88 BRIDGE (SEAVEY RD.)

PATCH LOCATION NUMBER	STATION	LANE 1			LANE 2		
		SIZE (L X W)	AREA (SQ. YD.)	TYPE	SIZE (L X W)	AREA (SQ. YD.)	TYPE
	178+34	START OF JCP PAVEMENT-END OF OMISSION					
81	178+34	8 x 12	10.7	II			
82	179+39	4 x 12	5.3	II			
83	179+69	6 x 6	4.0	I			
84	180+44	9 x 6	6.0	II			
85	180+58	14 x 12	18.7	III			
86	180+84	6 x 12	8.0	II			
87	181+56	6 x 6	4.0	I			
88	182+18	6 x 6	4.0	I			
89	182+44	10 x 6	6.7	II			
90	183+22	6 x 12	8.0	II			
91	184+11	13 x 12	17.3	III			
92	184+40	20 x 6	13.3	II			
93	184+66	13 x 12	17.3	III			
94	184+88	4 x 12	5.3	II			
95	185+15	7 x 12	9.3	II			
96	185+28	14 x 12	18.7	III			
97	185+48	21 x 6	14.0	II			
98	185+69	10 x 12	13.3	II			
99	185+91	14 x 6	9.3	II			
100	186+11	12 x 6	8.0	II			
101	186+30	11 x 6	7.3	II			
102	186+47	12 x 6	8.0	II	12 x 12	16.0	III
103	186+87				5 x 12	6.7	II
104	187+13				5 x 12	6.7	II
105	187+23				27 x 12	36.0	IV
106	188+06				6 x 12	8.0	II
107	188+18				11 x 12	14.7	II
108	188+35				14 x 12	18.7	III
109	188+55				51 x 12	68.0	IV
110	189+12				17 x 12	22.7	III
111	189+61				6 x 12	8.0	II
112	189+80				11 x 12	14.7	II
113	190+10				12 x 6	8.0	II
114	190+33				15 x 12	20.0	III
115	190+59	15 x 6	10.0	II	15 x 12	20.0	III
116	190+80	9 x 6	6.0	II	9 x 12	12.0	II

CLASS "D" PATCHING

ILLINOIS DEPARTMENT OF TRANSPORTATION
PAVEMENT PATCHING SCHEDULE

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NUMBER
FAP 326	107 CRC-PP-3	KANE	13	9

CLASS D: PAVEMENT PATCHING SCHEDULE
Northbound ILLINOIS ROUTE 47
GALENA BLVD. TO NORTH OF I-88 BRIDGE (SEAVEY RD.)

PATCH LOCATION NUMBER	STATION	LANE 1			LANE 2		
		SIZE (L X W)	AREA (SQ. YD.)	TYPE	SIZE (L X W)	AREA (SQ. YD.)	TYPE
117	190+95	11 x 6	7.3	II	11 x 12	14.7	II
118	191+10	17 x 6	11.3	II	17 x 12	22.7	III
119	191+44	8 x 12	10.7	II	8 x 12	10.7	II
120	191+74				4 x 12	5.3	II
121	191+92				4 x 12	5.3	II
122	192+14	15 x 6	10.0	II	15 x 6	10.0	II
123	192+35	4 x 12	5.3	II	4 x 12	5.3	II
124	192+58				4 x 12	5.3	II
125	192+80				8 x 12	10.7	II
126	192+94				4 x 12	5.3	II
	194+17	SOUTH BRIDGE JOINT-START OF OMISSION					
	195+83	NORTH BRIDGE JOINT-END OF OMISSION					
117	197+22				6 x 12	8.0	II
118	197+99				4 x 12	5.3	II
119	198+08				15 x 12	20.0	III
120	198+30				17 x 12	22.7	III
121	198+53				11 x 12	14.7	II
122	198+71				5 x 12	6.7	II
123	199+34	12 x 6	8.0	II			
124	199+40				8 x 12	10.7	II
125	199+54				5 x 12	6.7	II
126	199+78				6 x 12	8.0	II
127	199+90	16 x 6	10.7	II	20 x 6	13.3	II
128	200+17	14 x 6	9.3	II	14 x 6	9.3	II
129	200+37	11 x 6	7.3	II	11 x 12	14.7	II
130	200+55				17 x 12	22.7	III
131	200+77	18 x 6	12.0	II	18 x 12	24.0	III
132	201+01	67 x 6	44.7	IV	61 x 12	81.3	IV
133	201+74				10 x 12	13.3	II
134	201+89	14 x 6	9.3	II			
135	202+10	15 x 12	20.0	III			
136	202+13				12 x 12	16.0	III
137	202+30	14 x 6	9.3	II	14 x 12	18.7	III
138	202+51	6 x 12	8.0	II	6 x 12	8.0	II
139	202+64	12 x 12	16.0	III	12 x 12	16.0	III
140	202+83	30 x 6	20.0	III			
141	202+84				30 x 12	40.0	IV

CLASS D: PAVEMENT PATCHING SCHEDULE CONTRACT 62943
Northbound ILLINOIS ROUTE 47
GALENA BLVD. TO NORTH OF I-88 BRIDGE (SEAVEY RD.)

PATCH LOCATION NUMBER	STATION	LANE 1			LANE 2		
		SIZE (L X W)	AREA (SQ. YD.)	TYPE	SIZE (L X W)	AREA (SQ. YD.)	TYPE
142	203+19				16 x 6	10.7	II
143	203+41	10 x 6	6.7	II	10 x 6	6.7	II
144	203+57	20 x 6	13.3	II	20 x 6	13.3	II
145	203+83	13 x 6	8.7	II	13 x 6	8.7	II
146	203+96	5 x 12	6.7	II	5 x 12	6.7	II
147	204+08	11 x 6	7.3	II	11 x 12	14.7	II
148	204+24	6 x 6	4.0	I	6 x 12	8.0	II
149	204+39	7 x 6	4.7	I	7 x 12	9.3	II
150	240+54	16 x 6	10.7	II	16 x 12	21.3	III
151	204+76	13 x 6	8.7	II	13 x 12	17.3	III
152	204+95	16 x 6	10.7	II	16 x 6	10.7	II
153	205+41	14 x 6	9.3	II			
154	205+61	16 x 6	10.7	II			
155	205+83	16 x 12	21.3	III			
156	206+10	10 x 12	13.3	II			
157	206+48	5 x 12	6.7	II			
158	206+74	4 x 12	5.3	II			
159	206+99	4 x 12	5.3	II			
160	207+98	4 x 12	5.3	II			
161	208+07	30 x 6	20.0	III			
162	208+52	8 x 6	5.3	II			
163	208+69	5 x 12	6.7	II			
164	208+81	30 x 6	20.0	III			
165	209+40	16 x 6	10.7	II			
166	209+62	36 x 6	24.0	III			
167	210+18	12 x 12	16.0	III			
168	210+52	24 x 6	16.0	III			
169	210+82	36 x 12	48.0	IV			
170	211+31	11 x 12	14.7	II			
171	211+55	7 x 12	9.3	II			
172	211+92	13 x 12	17.3	III			
	212+15	END OF JCP PAVEMENT-START OF OMISSION					
	212+91	CENTERLINE-SEAVEY RD.-END OF OMISSION/LIMITS					

CLASS "D" PATCHING
(BOTH SCHEDULES)

ILLINOIS DEPARTMENT OF TRANSPORTATION
PAVEMENT PATCHING SCHEDULE

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NUMBER
FAP 326	107 CRC-PP-3	KANE	13	10

CLASS D: PAVEMENT PATCHING SCHEDULE

Southbound ILLINOIS ROUTE 47
NORTH OF I-88 BRIDGE (SEAVEY RD.) TO NORTH OF GALENA BLVD.

PATCH LOCATION NUMBER	STATION	LANE 1			LANE 2		
		SIZE (L X W)	AREA (SQ. YD.)	TYPE	SIZE (L X W)	AREA (SQ. YD.)	TYPE
	0+00	CENTERLINE-SEAVEY RD.-START OF OMISSION/LIMITS					
	0+76	START OF JCP PAVEMENT-END OF OMISSION					
173	0+76	30 x 6	20.0	III			
174	1+05	6 x 12	8.0	II			
175	1+17	6 x 12	8.0	II			
176	1+29	13 x 12	17.3	III			
177	1+49	12 x 6	8.0	II			
178	1+66	13 x 6	8.7	II			
179	1+87	6 x 12	8.0	II			
180	1+99	10 x 12	13.3	II			
181	2+14	10 x 12	13.3	II			
182	2+30	8 x 12	10.7	II			
183	2+44	10 x 6	6.7	II			
184	2+60	15 x 12	20.0	III			
185	2+81	14 x 12	18.7	III			
186	3+64	5 x 12	6.7	II			
187	4+01	9 x 6	6.0	II			
188	4+16	32 x 12	42.7	IV			
189	4+80	4 x 12	5.3	II			
190	4+89	19 x 6	12.7	II			
191	5+88				4 x 12		
192	6+73				6 x 6		
193	7+07				4 x 12		
194	7+15				4 x 12		
195	7+28				5 x 12	6.7	II
196	7+95	4 x 12					
197	8+35	18 x 6	12.0	II			
198	8+72	6 x 12	8.0	II	6 x 12	8.0	II
199	9+60				15 x 12	20.0	III
200	9+71	4 x 12					
201	10+14	17 x 12	22.7	III	17 x 12	22.7	III
202	10+39	9 x 6	6.0	II	9 x 12	12.0	II
203	10+56	7 x 6	4.7	I	7 x 12	9.3	II
204	10+69				4 x 12	5.3	II
205	10+73				23 x 6	15.3	III
206	11+02				86 x 12	114.7	IV
207	12+24				13 x 12	17.3	III

CLASS D: PAVEMENT PATCHING SCHEDULE

CONTRACT 62943

Southbound ILLINOIS ROUTE 47
NORTH OF I-88 BRIDGE (SEAVEY RD.) TO NORTH OF GALENA BLVD.

PATCH LOCATION NUMBER	STATION	LANE 1			LANE 2		
		SIZE (L X W)	AREA (SQ. YD.)	TYPE	SIZE (L X W)	AREA (SQ. YD.)	TYPE
208	12+44	6 x 12	8.0	II	6 x 12	8.0	II
209	12+68				4 x 12	5.3	II
210	12+78				4 x 12	5.3	II
211	13+19				8 x 12	10.7	II
212	13+45				16 x 6	10.7	II
213	13+95				6 x 12	8.0	II
214	14+06				32 x 6	21.3	III
215	14+56				5 x 12	6.7	II
216	14+83	4 x 12	5.3	II			
217	14+91				8 x 6	5.3	II
218	15+80				6 x 6	4.0	I
	16+86	NORTH BRIDGE JOINT-START OF OMISSION					
	18+52	SOUTH BRIDGE JOINT-END OF OMISSION					
219	19+81				14 x 12	18.7	III
220	20+10	14 x 6	9.3	II	14 x 6	9.3	II
221	24+43	132 x 6	88.0	IV			
	26+22	CENTERLINE-FINLEY RD					
222	26+36	25 x 6	16.7	III			
223	26+59	11 x 6	7.3	II			
224	28+87	30 x 6	20.0	III			
225	29+71	6 x 12	8.0	II			
226	34+66	8 x 12	10.7	II			
	34+74	END OF JCP PAVEMENT-START OF OMISSION					

CLASS "D" PATCHING
(BOTH SCHEDULES)

ILLINOIS DEPARTMENT OF TRANSPORTATION
PAVEMENT PATCHING SCHEDULE

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NUMBER
FAP 326	107 CRC-PP-3	KANE	13	11

CLASS A: PAVEMENT PATCHING SCHEDULE

Southbound ILLINOIS ROUTE 47
NORTH OF I-88 BRIDGE (SEAVEY RD.) TO NORTH OF GALENA BLVD.

PATCH LOCATION NUMBER	STATION	LANE 1			LANE 2		
		SIZE (L X W)	AREA (SQ. YD.)	TYPE	SIZE (L X W)	AREA (SQ. YD.)	TYPE
	78+29	START OF CRC PAVEMENT-END OF OMISSION					
227	80+13	13 x 12	17.3	III			
228	81+44				15 x 6	10.0	II
229	82+06				12 x 12	16.0	III
230	83+90				10 x 6	6.7	II
231	87+95	22 x 12	29.3	IV			
232	88+49	8 x 6	5.3	II			
233	89+50	12 x 12	16.0	III			
234	98+15				12 x 12	16.0	III
235	102+09				12 x 12	16.0	III
236	107+96	47 x 6	31.3	IV			
237	108+01				8 x 6	5.3	II
238	108+60	23 x 6	15.3	III	23 x 6	15.3	III
239	108+93				12 x 6	8.0	II
240	109+08				30 x 12	40.0	IV
241	111+04				50 x 12	66.7	IV
242	111+70	22 x 12	29.3	IV	17 x 12	22.7	III
243	112+19	20 x 6	13.3	II			
244	112+96				40 x 6	26.7	IV
	113+29	CENTERLINE-HARTER RD.					
245	115+64	25 x 6	16.7	III			
246	116+54				18 x 12	24.0	III
247	117+68				11 x 12	14.7	II
248	118+80				6 x 12	8.0	II
249	119+49				33 x 12	44.0	IV
250	119+86	19 x 6	12.7	II			
251	120+13				7 x 6	4.7	I
252	121+18				8 x 6	5.3	II
253	122+13	31 x 6	20.7	III			
254	122+36	11 x 6	7.3	II			
255	124+92				9 x 6	6.0	II
256	125+69	20 x 6	13.3	II			
257	128+33				10 x 6	6.7	II
258	128+55				14 x 12	18.7	III
259	130+37				11 x 6	7.3	II
260	131+54	7 x 6	4.7	I			
	132+65	CENTERLINE-WAUBONSEE RD.					

CLASS A: PAVEMENT PATCHING SCHEDULE

CONTRACT 62943

Southbound ILLINOIS ROUTE 47
NORTH OF I-88 BRIDGE (SEAVEY RD.) TO NORTH OF GALENA BLVD.

PATCH LOCATION NUMBER	STATION	LANE 1			LANE 2		
		SIZE (L X W)	AREA (SQ. YD.)	TYPE	SIZE (L X W)	AREA (SQ. YD.)	TYPE
261	132+67				16 x 12	21.3	III
262	134+38				12 x 6	8.0	II
263	137+25				13 x 12	17.3	III
264	137+81	15 x 6	10.0	II	15 x 6	10.0	II
265	138+94	34 x 6	22.7	III	34 x 6	22.7	III
266	139+40				10 x 6	6.7	II
267	140+12				17 x 6	11.3	II
268	142+67	15 x 12	20.0	III			
269	143+13	42 x 12	56.0	IV			
270	143+61				15 x 6	10.0	II
271	144+06	29 x 12	38.7	IV			
272	144+12				12 x 6	8.0	II
273	145+63				13 x 6	8.7	II
274	148+86				8 x 6	5.3	II
275	152+56	15 x 12	20.0	III			
276	154+06	10 x 12	13.3	II	10 x 12	13.3	II
277	154+69				10 x 12	13.3	II
278	156+17				7 x 6	4.7	I
	161+59	CENTERLINE-KEDEKA RD.					
279	164+91				16 x 12	21.3	III
280	171+05				11 x 12	14.7	II
281	171+21				35 x 6	23.3	III
282	172+41				10 x 6	6.7	II
283	176+86	19 x 12	25.3	IV			
284	177+52	14 x 12	18.7	III			
285	182+88				15 x 6	10.0	II
286	183+79				12 x 6	8.0	II
287	184+48				15 x 6	10.0	II
	189+59	CENTERLINE-WHEELER RD.					
288	191+31	11 x 12	14.7	II			
289	192+98				13 x 12	17.3	III
290	194+13	24 x 12	32.0	IV			
291	196+43				12 x 12	16.0	III
292	196+60				10 x 12	13.3	II
293	197+70				14 x 12	18.7	III
294	197+90				14 x 12	18.7	III
295	198+57				34 x 12	45.3	IV

CLASS "A" PATCHING
(BOTH SCHEDULES)

ILLINOIS DEPARTMENT OF TRANSPORTATION
PAVEMENT PATCHING SCHEDULE

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NUMBER
FAP 326	107 CRC-PP-3	KANE	13	11A

CLASS A: PAVEMENT PATCHING SCHEDULE
Southbound ILLINOIS ROUTE 47
 NORTH OF I-88 BRIDGE (SEAVEY RD.) TO NORTH OF GALENA BLVD.

CONTRACT 62943

PATCH LOCATION NUMBER	STATION	LANE 1			LANE 2		
		SIZE (L X W)	AREA (SQ. YD.)	TYPE	SIZE (L X W)	AREA (SQ. YD.)	TYPE
296	198+76	10 x 12	13.3	II			
297	198+93	12 x 6	8.0	II			
298	199+23				12 x 6	8.0	II
299	200+13	18 x 12	24.0	III			
	200+91	CENTERLINE-W. PARK AVE.					
300	204+86	6 x 12	8.0	II	6 x 12	8.0	II
	207+40	END OF CRC PAVEMENT-START OF OMISSION					
	213+54	CENTERLINE-GALENA BLVD-END OF OMISSION/LIMITS					

LOCATION CODE:

- LT LANE - LEFT TURN LANE/ BAY (NEXT TO LANE 1)
- RT LANE - RIGHT TURN LANE/ BAY (NEXT TO LANE 2/3)
- CROSSOVER - MEDIAN CROSSOVER (NEXT TO LANE 1)

CLASS "A" PATCHING

ILLINOIS DEPARTMENT OF TRANSPORTATION

PAVEMENT PATCHING SCHEDULE