

35800100 - PREPARATION OF BASE
STA. 21+40 - STA. 22+90 = 166.67 SQ. YD.

35800200 - AGGREGATE BASE REPAIR
STA. 21+40 - STA. 22+90 = 16.7 TONS

RAILROAD OMISSION
STA. 23+00 - STA. 23+40

3" TO 3/4" AGGREGATE BASE COURSE,
TYPE B SPECIAL (SEE RUNDOWN DETAIL)

END BITUMINOUS SURFACE TREATMENT (CLASS A-2)

3/4" TO 3" AGGREGATE BASE COURSE,
TYPE B, SPECIAL (SEE RUNDOWN DETAIL)

CL P.E. STA. 25+85 LT. &
MAILBOX TURNOUT ON
NORTH SIDE OF P.E.
SEE PRIVATE ENTRANCE
& MAILBOX TURNOUT DETAILS


CL P.E. STA. 25+99 RT.
SEE PRIVATE ENTRANCE DETAIL


STA. 24+15 RT.
2256 N

CL F.E. STA. 28+50 LT.

F.A.S. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1678	6. MFT, Q	EDGAR	29	12

CONTRACT NO. 70467

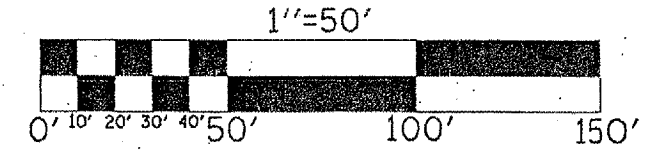

 AGGREGATE BASE REPAIR