

DECK POURING SEQUENCE

Notes:

When the deck pour is stopped for the day at one or more of the transverse bonded construction joints in the deck pouring sequence as shown, the next pour shall not be made until both of the following are met:


1. At least 72 hours shall have elapsed from the end of the previous pour.
2. The concrete strength shall have attained a minimum flexural strength of 650 psi or a minimum compressive strength of 3500 psi

Contractor may deviate from the Deck Pouring Sequence shown upon approval of the Engineer. All deck concrete in the positive moment regions shall be placed and cured per Note 1 prior to pouring the deck concrete in the negative moment regions.


Expansion Joint Blockouts to be poured following pour ③, the approach spans and the sidewalk pour. See Sheets 12 and 20 of 39 for additional blockout details.

Legend

- ① Deck Pouring Sequence Number

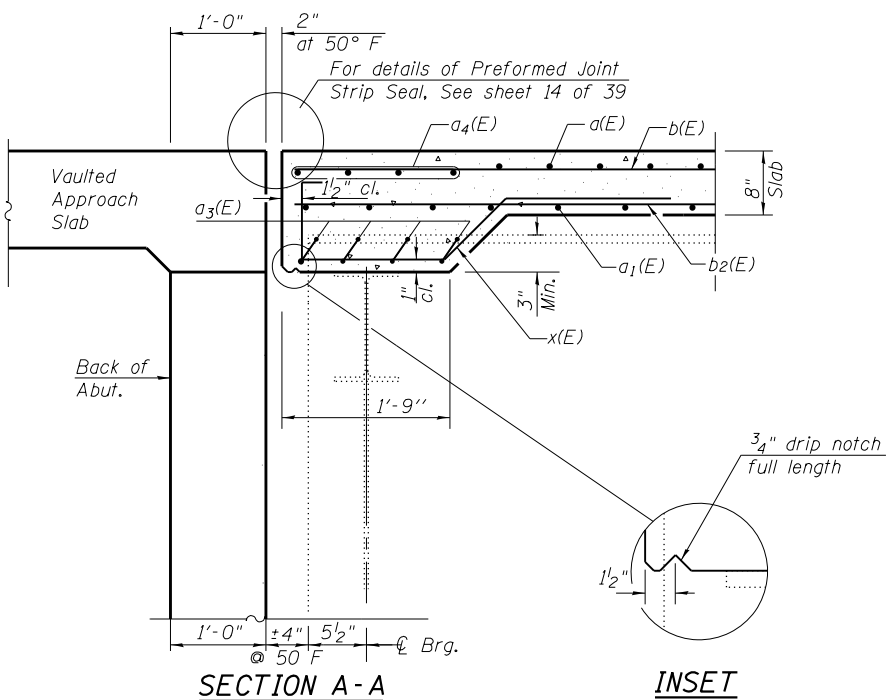

INSET

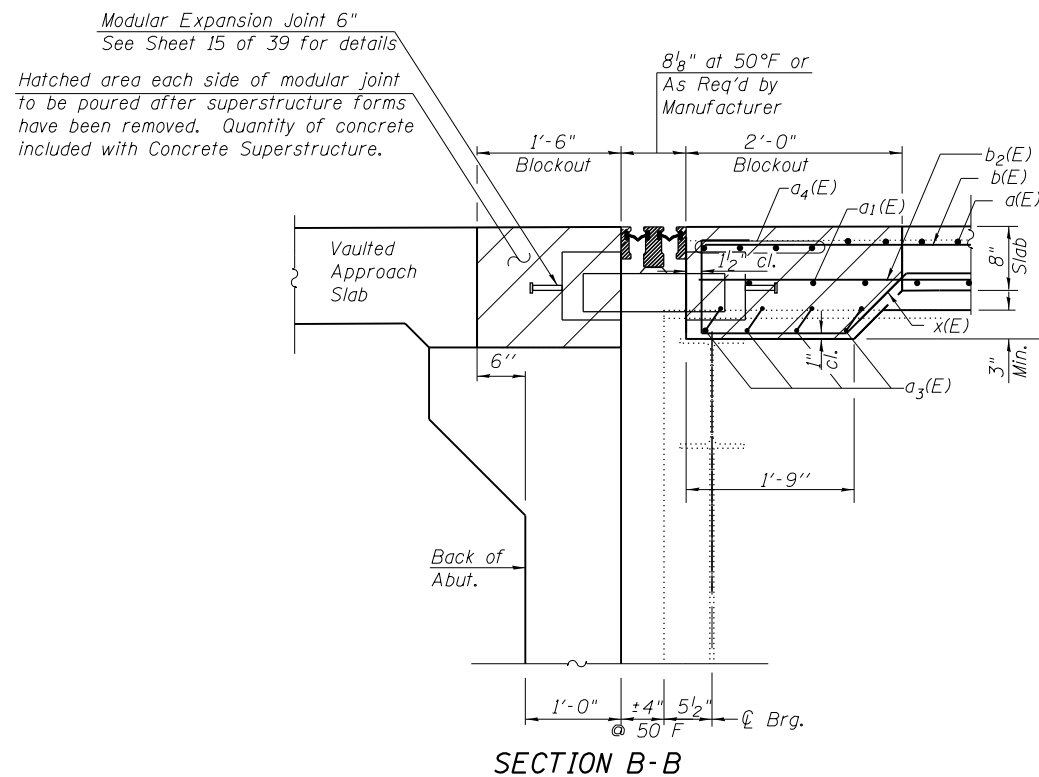

SECTION B-B

BLANK, WESSELINK, COOK & ASSOCIATES DECATUR, ILLINOIS ENGINEERS - CONSULTANTS DESIGN FIRM NO. 184000894

FILE NAME =	USER NAME =	DESIGNED <i>PBB</i>	REVISED -
		CHECKED <i>MCB</i>	REVISED -
		DRAWN <i>MLO</i>	REVISED -
		CHECKED <i>PBB/MCB</i>	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**SUPERSTRUCTURE DETAILS
STRUCTURE NO. 058-0049**

SHEET NO. 10 OF 39 SHEETS

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
710	(48X-B-2)BR & (48BR)BR	MACON	144	48
CONTRACT NO. 74438				

ILLINOIS FED. AID PROJECT