

See Sheets 6, 17, and 20 of 28 for Abutment Blockout Removal


- Indicates Concrete Removal
- Indicates Deck Slab Repair (Full Depth, Type II)
- Indicates Deck Slab Repair (Partial Depth)

**PLAN**


**DECK SLAB REPAIR SCHEDULE**

| Patch No. | Size       | Deck Slab Repair (Part. Depth) | Deck Slab Repair (FD TY I) | Deck Slab Repair (FD TY II) | Patch No.       | Size      | Deck Slab Repair (Part. Depth) | Deck Slab Repair (FD TY I) | Deck Slab Repair (FD TY II) |   |
|-----------|------------|--------------------------------|----------------------------|-----------------------------|-----------------|-----------|--------------------------------|----------------------------|-----------------------------|---|
| 1         | 31.3 x 3.0 | 11.8                           |                            |                             | 20              | 2.0 x 3.0 |                                |                            | 1.7                         |   |
| 2         | 10.0 x 6.0 |                                |                            | 6.7                         | 21              | 2.0 x 6.0 |                                |                            | 1.3                         |   |
| 3         | 7.2 x 7.0  | 5.6                            |                            |                             | 22              | 2.0 x 4.0 | 0.9                            |                            |                             |   |
| 4         | 3.0 x 2.0  |                                |                            | 0.7                         |                 |           |                                |                            |                             |   |
| 5         | 2.0 x 6.0  |                                |                            | 1.4                         |                 |           |                                |                            |                             |   |
| 6         | 2.0 x 12.0 |                                |                            | 2.7                         |                 |           |                                |                            |                             |   |
| 7         | 3.0 x 3.0  | 1.0                            |                            |                             |                 |           |                                |                            |                             |   |
| 8         | 2.0 x 6.0  |                                |                            | 1.3                         |                 |           |                                |                            |                             |   |
| 9         | 2.0 x 5.0  | 1.1                            |                            |                             |                 |           |                                |                            |                             |   |
| 10        | 2.0 x 6.0  |                                |                            | 1.3                         |                 |           |                                |                            |                             |   |
| 11        | 2.0 x 6.0  |                                |                            | 1.3                         |                 |           |                                |                            |                             |   |
| 12        | 2.0 x 6.0  |                                |                            | 1.3                         |                 |           |                                |                            |                             |   |
| 13        | 2.0 x 6.0  |                                |                            | 1.3                         |                 |           |                                |                            |                             |   |
| 14        | 2.0 x 6.0  |                                |                            | 1.3                         |                 |           |                                |                            |                             |   |
| 15        | 2.0 x 6.0  |                                |                            | 1.3                         |                 |           |                                |                            |                             |   |
| 16        | 11.7 x 3.0 | 3.9                            |                            |                             |                 |           |                                |                            |                             |   |
| 17        | 7.6 x 5.0  | 4.2                            |                            |                             |                 |           |                                |                            |                             |   |
| 18        | 3.0 x 6.0  |                                |                            | 2.0                         |                 |           |                                |                            |                             |   |
| 19        | 2.0 x 6.0  |                                |                            | 1.3                         |                 |           |                                |                            |                             |   |
|           |            |                                |                            |                             | Total (Sq. Yd.) |           | 27.1                           | 0                          | 26.8                        | 0 |
|           |            |                                |                            |                             | Use (Sq. Yd.)   |           | 27                             | 0                          | 27                          | 0 |


**SECTION A-A**

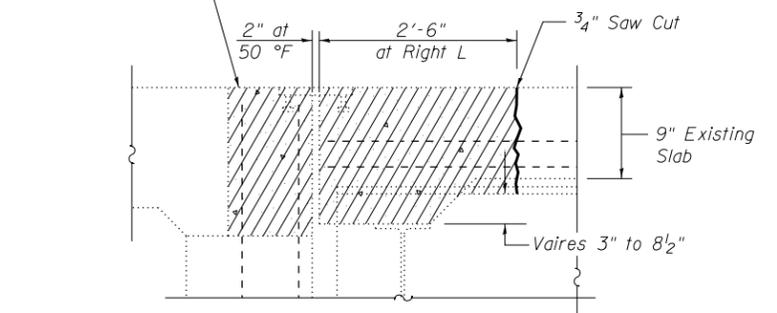

**SECTION B-B**

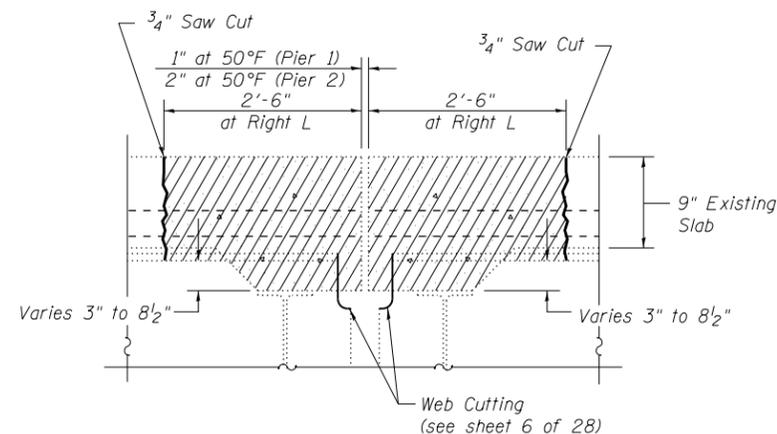

**SECTION C-C**  
(at Right L)

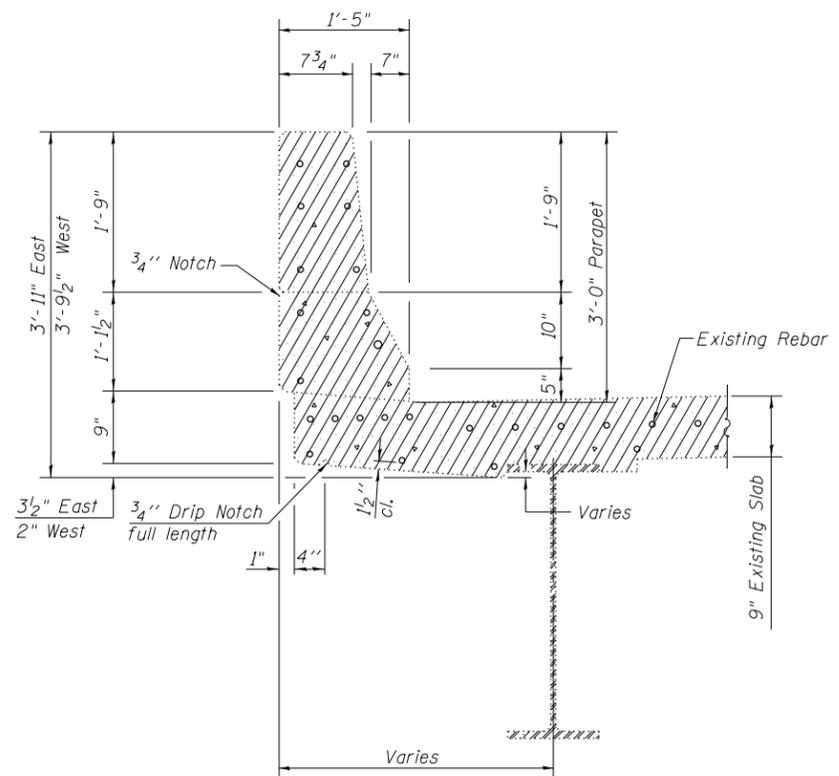

**Notes:**  
 The Deck Slab repairs shall be completed prior to placement of overlay. The condition of the deck shall be inspected and surveyed for additional Deck Slab Repairs if the date of construction occurs after April 2014. The locations and sizes of the Deck Slab Repairs are approximate. Actual locations and sizes are to be determined in the field by the Engineer. The locations and sizes of the Deck Slab Repairs were determined by a visual survey completed on April 24, 2012. The Engineer shall record the location of the actual Deck Slab Repair on the As Built Plans. There is an estimated 27 sq. yd. of Partial Depth Deck Slab Repair required. Partial Depth repairs shall be included with Bridge Deck Scarification. See special provisions for Bridge Deck Fly Ash or GCBF Slag Concrete Overlay. Quantity of Deck Slab Repair (Partial Depth) for information only. Web cutting to facilitate P.J.S. placement is included with cost of Concrete Removal. See sheet 6 of 28.

**BILL OF MATERIAL**

| Item                                   | Unit    | Total |
|--|---------|-------|
| Concrete Removal                       | Cu. Yd. | 38.9  |
| Deck Slab Repair (Full Depth, Type II) | Sq. Yd. | 27    |