PAVEMENT REMOVAL (TYP)

COMBINATION CONCRETE CURB AND GUTTER REMOVAL (TYP)

SIDEWALK REMOVAL (TYP)

FENCE REMOVAL (TYP)

EXISTING ACCESS CONTROL

+12.46
69.06LT

PROPOSED ACCESS CONTROL

MATCHLINE STA. 1066+00

MATCHLINE STA. 1071+50

1066

1067

1068

1069

1070+00

1071

147TH STREET

PROPOSED ℄ 147TH STREET

12

AC

PROPOSED TEMPORARY EASEMENT

8

8

12

12

+80.53
84.94RT

MEDIAN SURFACE REMOVAL (TYP)

EXISTING ACCESS CONTROL

AC

AC

6

AC

+36.34
69.00RT

PROPOSED TEMPORARY EASEMENT

TREE TRUNK PROTECTION (TYP)

LEGEND:

- PAVEMENT REMOVAL
- PAVEMENT PATCHING, CLASS D, TYPE IV
- MEDIAN REMOVAL
- MEDIAN SURFACE REMOVAL
- SIDEWALK REMOVAL
- PAVED SHOULDER REMOVAL
- DRIVEWAY PAVEMENT REMOVAL
- HMA SURFACE REMOVAL
- 10 — TREE REMOVAL (UNITS) (NO UNIT SHOWN = <6)
- TREE TRUNK PROTECTION
- LIGHT POLE AND FOUNDATION REMOVAL (SEE ROADWAY LIGHTING & SURVEILLANCE PLANS)
- CHAIN LINK FENCE REMOVAL
- COMB CONC CURB & GUTTER REMOVAL

NOTE: SEE EXISTING DRAINAGE AND REMOVAL PLANS FOR ADDITIONAL UTILITY STRUCTURE REMOVALS AND ADJUSTMENTS.

20 0 20 40

SCALE: 1" = 20'-0"

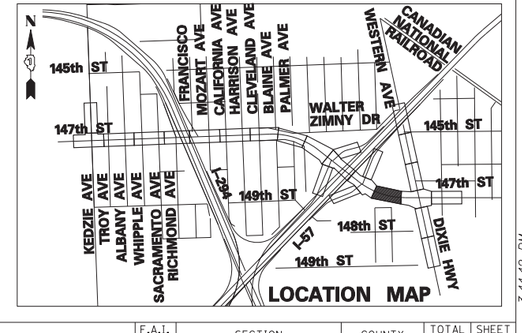

TYLIN INTERNATIONAL	USER NAME =	DESIGNED -	REVISED -
		DRAWN -	REVISED -
	PLOT SCALE =	CHECKED -	REVISED -
	PLOT DATE =	DATE - 5/23/2012	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

147TH STREET PROJECT
REMOVAL PLANS – 147TH STREET

SCALE: 1"=20' | SHEET NO. 12 OF 20 SHEETS | STA. 1066+00 TO STA. 1071+50

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
XX	(0405-1 & 0506-2) R-1	COOK	577	48
		CONTRACT NO. 60M57		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

p:\602540(57-294)\road\p10_147th\P10_REM_SHT12.dgn

5/21/2012 3:44:42 PM