

THE FOLLOWING ITEMS SHALL BE REMOVED BY THE CONTRACTOR AND SHALL BE DISPOSED OF BY THEM OUTSIDE SIDE THE RIGHT-OF-WAY AT THEIR EXPENSE. THE SALVAGE VALUE OF THE REMOVED EQUIPMENT SHALL BE REFLECTED IN THE CONTRACT BID PRICE.

- 8 EACH SIGNAL HEAD, 1-FACE, 3-SECTION
- 8 EACH SIGNAL HEAD, 1-FACE, 5-SECTION
- 4 EACH STEEL MAST ARM AND POLE
- 2 EACH SIGNAL POST
- 6 EACH CONCRETE FOUNDATION
- 4 EACH PEDESTRIAN SIGNAL HEAD, 2-FACE
- 4 EACH PEDESTRIAN PUSH-BUTTON
- 1 EACH SERVICE INSTALLATION
- 3 EACH HANDHOLE
- 4 EACH HEAVY-DUTY HANDHOLE
- 1 EACH DOUBLE HANDHOLE

THE FOLLOWING ITEMS SHALL BE REMOVED AND RELOCATED WITHIN THIS INTERSECTION. CONTRACTOR SHALL BE RESPONSIBLE TO KEEP THE FOLLOWING ITEMS SAFELY STORED, FREE FROM THEFT OR DAMAGE UNTIL THE RELOCATION IS POSSIBLE.


- 2 EACH LIGHT DETECTOR
- 15 SOFT SIGN PANEL - TYPE 1 (MAST ARM MOUNTED STREET NAME SIGNS)
- 25 SOFT SIGN PANEL - TYPE 2 (MAST ARM MOUNTED STREET NAME SIGNS)

CONSTRUCTION NOTES:

- 1 RELOCATE EXISTING LIGHT DETECTORS AND CONFIRMATION BEACONS TO THE NEW MAST ARMS.

RESTORATION OF WORK AREA: RESTORATION OF THE TRAFFIC SIGNAL WORK AREA SHALL BE INCIDENTAL TO THE RELATED PAY ITEM SUCH AS FOUNDATION, CONDUIT, HANDHOLE, TRENCH AND BACKFILL, ETC., AND NO EXTRA COMPENSATION SHALL BE ALLOWED. ALL ROADWAY SURFACES SUCH AS SHOULDERS, MEDIANS, SIDEWALKS, PAVEMENT, ETC. SHALL BE REPLACED IN KIND. ALL DAMAGE TO MOWED LAWNS SHALL BE REPLACED WITH AN APPROVED SOD, AND ALL DAMAGE TO UNMOWED FIELDS SHALL BE SEEDDED IN ACCORDANCE WITH STANDARD SPECIFICATIONS 252 AND 250 RESPECTIVELY.

NOTE:
THE TRAFFIC SIGNAL CONTROLLER EQUIPMENT FOR THIS PROJECT SHALL BE "EAGLE" TO MATCH THE EXISTING ADJACENT SYSTEM

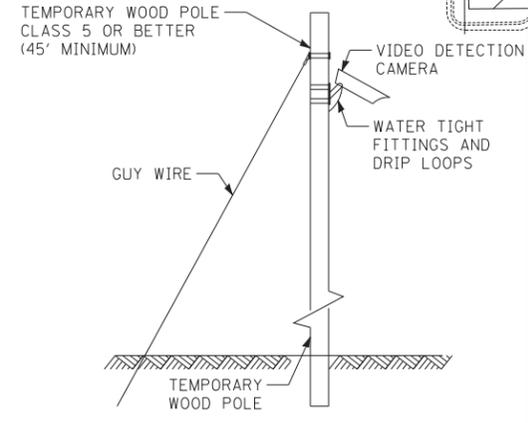

TEMPORARY VIDEO DETECTION MOUNTING DETAIL

(NOT TO SCALE)



SCALE: 1" = 20'-0"

TYLIN INTERNATIONAL	USER NAME =	DESIGNED - MBR	REVISED -
		DRAWN - MBR	REVISED -
	PLOT SCALE =	CHECKED - DAJ	REVISED -
	PLOT DATE =	DATE - 5/23/2012	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**147TH STREET PROJECT
TEMPORARY TRAFFIC SIGNAL INSTALLATION AND
REMOVE EXISTING TRAFFIC SIGNAL EQUIPMENT PLAN
ILL RTE 83 (147TH STREET) AND KEDZIE AVE**

SCALE: 1"=20' SHEET NO. 1 OF 1 SHEET STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
XX	(0405-1 & 0506-2) R-1	COOK	577	360
FED. ROAD DIST. NO.			ILLINOIS FED. AID PROJECT	CONTRACT NO. 60M57