


Alignments:
STEPHUS20WB
STEPHUS20EB



Alignments:
WINUS20WB
WINUS20EB

EXISTING HORIZONTAL & VERTICAL CONTROL

DISTRICT NETWORK
MONUMENT

Alignment:
I39_D2

SURVEY WORK POINT NO. 111
SURVEY WORK POINT NO. 109
SURVEY WORK POINT NO. 106
SURVEY WORK POINT NO. 117
SURVEY WORK POINT NO. 116
SURVEY WORK POINT NO. 115
SURVEY WORK POINT NO. 114
SURVEY WORK POINT NO. 113
SURVEY WORK POINT NO. 112
SURVEY WORK POINT NO. 110
SURVEY WORK POINT NO. 108
SURVEY WORK POINT NO. 107

Winnebago County
Ogle County

HORIZONTAL CONTROL POINTS							
POINT	NORTH	EAST	ELEVATION	CHAIN	STATION	OFFSET	DESCRIPTION
1	1808344.1206	2598808.7481	862.6316	I39_D2	336+24.8501	20.7316' RT	PIN
2	1808666.3182	2598785.3277	862.2660	I39_D2	339+47.2231	0.1367' LT	PIN
3	1824138.1030	2599851.2144	914.2750	I39_D2	495+59.3578	15.6341' RT	PIN
4	1824493.8854	2599948.7198	915.6729	I39_D2	499+28.2568	14.2570' RT	PIN
5	1834658.7456	2606499.8997	913.3271	I39_D2	624+21.8360	23.9529' RT	PIN
6	1834900.8661	2606703.3810	910.9442	I39_D2	627+35.6420	15.4523' LT	PIN
7	1841318.2624	2612630.1041	896.2764	I39_D2	715+80.8556	19.9600' RT	PIN
8	1841596.4900	2612641.5881	895.1417	I39_D2	718+56.7969	17.1567' LT	PIN
9	1868000.2663	2612011.5372	827.2713	I39_D2	982+75.4623	21.9484' RT	PIN
10	1868254.2858	2611962.2514	827.2844	I39_D2	985+30.0086	24.5404' LT	PIN
11	1878000.0220	2611967.1298	849.7360	I39_D2	1082+78.7039	0.1280' LT	PIN
12	1878604.8845	2611976.2564	856.9921	I39_D2	1088+83.0685	26.0514' RT	PIN
13	1904459.8927	2610885.7403	821.3696	I39_D2	1348+10.7030	17.0429' RT	PIN
14	1904642.4708	2610803.8993	820.9704	I39_D2	1350+10.7823	16.0347' RT	PIN
15	1907464.8165	2609565.9080	822.6474	I39_D2	1380+92.6928	25.2614' RT	PIN
16	1909842.7963	2608492.7468	831.2074	I39_D2	1407+01.5945	0.0911' RT	PIN
17	1911778.2223	2607904.4934	806.0036	I39_D2	1427+28.1853	18.4051' RT	PIN
18	1912131.9155	2607801.1646	800.7776	I39_D2	1430+95.6897	10.1779' LT	PIN
19	1914571.0272	2607565.8473	793.7121	I39_D2	1455+47.6327	15.6542' LT	PIN
20	1915360.0527	2607588.3934	796.0944	I39_D2	1463+35.9961	23.7500' RT	PIN
21	1920666.6205	2607476.4584	801.8437	I39_D2	1516+43.7441	25.2537' RT	PIN
22	1922326.0376	2607435.5156	802.0629	I39_D2	1533+03.6572	19.7857' RT	PIN
23	1917125.0242	2607526.8502	830.7845	I39_D2	1481+01.8798	0.0578' LT	PIN
24	1925903.8735	2607314.7803	801.3823	I39_D2	1568+83.2563	24.4557' LT	PIN
25	1926232.9946	2607353.2766	799.6702	I39_D2	1572+11.4795	21.0658' RT	PIN
26	1939181.4809	2608168.1499	790.1327	I39_D2	1702+32.5044	23.2308' RT	PIN
27	1939439.3196	2608162.1506	789.9477	I39_D2	1704+90.4103	22.0734' RT	PIN

SURVEY WORK POINT NO. 118

TOPO SURVEY POINT NO. 24

TOPO SURVEY POINT NO. 19

TOPO SURVEY POINT NO. 18

Ogle County
Lee County

TOPO SURVEY POINT NO. 12


TOPO SURVEY POINT NO. 10

TOPO SURVEY POINT NO. 8

TOPO SURVEY POINT NO. 6

Alignment:
I39_D2

TOPO SURVEY POINT NO. 2
TOPO SURVEY POINT NO. 4
TOPO SURVEY POINT NO. 3
TOPO SURVEY POINT NO. 1

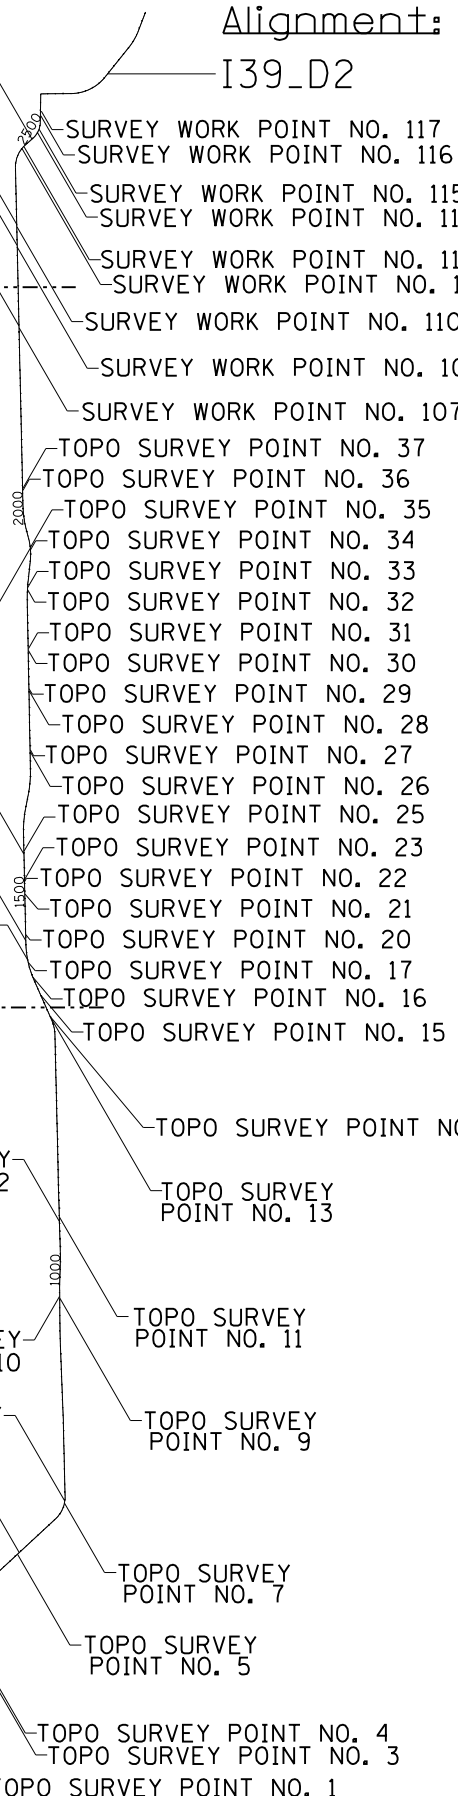

HORIZONTAL CONTROL POINTS							
POINT	NORTH	EAST	ELEVATION	CHAIN	STATION	OFFSET	DESCRIPTION
28	1947096.4223	2608016.9871	791.1639	I39_D2	1781+48.8887	20.6928' RT	PIN
29	1947381.9550	2608012.8769	792.7141	I39_D2	1784+34.4483	21.944' RT	PIN
30	1952374.9855	2607921.9689	774.6629	I39_D2	1834+28.3055	24.7931' RT	PIN
31	1952643.4634	2607913.4974	773.7934	I39_D2	1836+96.8951	21.3636' RT	PIN
32	1960292.8063	2607816.6350	766.3006	I39_D2	1913+49.2278	26.856' RT	PIN
33	1960604.5004	2607830.0994	767.7307	I39_D2	1916+61.5806	24.5613' RT	PIN
34	1965523.3778	2608205.4753	772.4811	I39_D2	1965+98.4910	24.3554' RT	PIN
35	1965818.9177	2608175.6298	773.2520	I39_D2	1968+94.7385	22.228' RT	PIN
36	1973232.4726	2607197.1992	783.8489	I39_D2	2044+05.5441	26.0285' RT	PIN
37	1973524.0226	2607188.7569	782.5733	I39_D2	2046+97.2100	24.1063' RT	PIN
90263	1910150.6003	2608368.1012	831.3515	I39_D2	1410+33.6162	3.7835' LT	PIN
902147	1903392.1142	2611250.2352	825.8844	I39_D2	1336+84.3186	21.6849' RT	PIN
902151	1907708.4734	2609527.2828	824.9792	I39_D2	1383+31.1547	88.4793' RT	PIN
902155	1915771.9580	2607643.3438	805.1055	I39_D2	1467+46.6329	87.4912' RT	PIN
902157	1917125.0242	2607526.8502	830.7845	I39_D2	1481+01.8798	0.0578' LT	PIN
902158	1917392.7645	2607515.4214	830.8067	I39_D2	1483+69.8032	5.7618' LT	PIN
902161	1921023.7191	2607530.9416	802.0482	I39_D2	1519+99.5967	87.3564' RT	PIN
902165	1926226.4771	2607421.2739	800.0773	I39_D2	1572+03.5102	88.9083' RT	PIN
65723053	2018977.1319	2608370.9014	821.3735	I39_D2	2509+24.8490	7.7818' RT	DISTRICT NETWORK MONUMENT

SURVEY WORK POINTS							
POINT	NORTH	EAST	ELEVATION	CHAIN	STATION	OFFSET	DESCRIPTION
106	1994678.8608	2606662.9113	819.4984	I39_D2	2258+58.5145	27.9097' LT	PIN
107	1994377.5588	2606717.3023	814.1019	I39_D2	2255+56.0759	19.7576' RT	PIN
108	2004861.7400	2606493.3156	832.4645	I39_D2	2360+42.6435	29.6008' RT	PIN
109	2005161.9387	2606423.9652	836.8399	I39_D2	2363+44.3157	33.0301' LT	PIN
110	2007551.6764	2606430.3405	829.7998	I39_D2	2387+33.3154	26.697' RT	PIN
111	2007953.1739	2606361.3059	827.4650	I39_D2	2391+36.2541	33.3565' LT	PIN
112	2017748.4658	2607092.6660	841.2581	I39_D2	2491+44.4493	32.93' RT	PIN
113	2018020.8105	2607335.9680	838.0364	I39_D2	2495+13.0642	35.145' RT	PIN
114	2019821.5229	2609122.4075	810.7620	I39_D2	2520+55.2871	27.1353' RT	PIN
115	2020260.5648	2609325.1019	811.9143	I39_D2	2525+34.9366	26.4801' RT	PIN
116	2022053.3336	2609512.1227	837.4089	I39_D2	2543+39.4679	25.9309' RT	PIN
117	2022639.1706	2609584.5498	847.7233	I39_D2	2549+26.3088	89.7151' RT	PIN
118	1965768.8881	2608140.6374	772.7681	I39_D2	1968+48.7853	17.9553' LT	PIN

FILE NAME =	USER NAME =	DESIGNED -	REVISED -
ct:\pw_work\p1dot\dossdd\0293945\02051	2-shr-HVC.dgn	DRAWN -	REVISED -
	PLOT SCALE = 25000.0000' / in.	CHECKED -	REVISED -
	PLOT DATE = Wed Jun 13 09:07:55 2012	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

EXISTING HORIZONTAL & VERTICAL CONTROL

SCALE: SHEET OF SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
*	D2 SAFETY 2012-1	**	175	17
CONTRACT NO. 64H76				
ILLINOIS FED. AID PROJECT				