


**STREET LIGHTING – BILL OF MATERIAL – THIS SHEET**

PAY ITEM	UNIT	QTY
UNIT DUCT, 600V, 2-1C NO.4, 1/C NO.6 GROUND, (XLP-TYPE USE), 1 1/4" DIA. POLYETHYLENE	FOOT	805
UNIT DUCT, 600V, 2-1C NO.2, 1/C NO.4 GROUND, (XLP-TYPE USE), 1 1/4" DIA. POLYETHYLENE	FOOT	775
LUMINAIRE, SODIUM VAPOR, HORIZONTAL MOUNT, 400 WATT	EACH	8
LIGHT POLE FOUNDATION, 30" DIAMETER	FOOT	56
BREAKAWAY DEVICE, TRANSFORMER BASE, 15 INCH BOLT CIRCLE	EACH	8
LIGHT POLE, GALVANIZED STEEL, 50 FT. M.H., 15 FT. MAST ARM	EACH	8

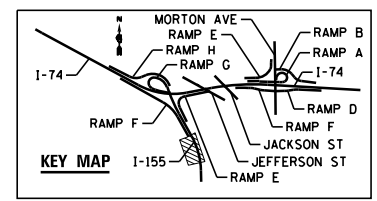

FILE NAME = ...D468620-sh-t-1-155-light15.dgn	DESIGNED - BENESCH	REVISED -		<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>I-155 LIGHTING PLANS</b>	F.A.I. RTE. =	SECTION = 90-[14R;(14HB-4,14,14HVB)BR]	COUNTY = TAZEWELL	TOTAL SHEETS = 2433	SHEET NO. = 1731			
USER NAME = tblank	CHECKED - GHT	REVISED -				SCALE: 1"=50'	SHEET NO. 16 OF 138 SHEETS	STA. 28+00 TO STA.	CONTRACT NO. 68620				
PLOT DATE = 9/5/2012	DATE - JULY 20, 2012	REVISED -				ILLINOIS FED. AID PROJECT							
• 74 & 155													