


STREET LIGHTING - BILL OF MATERIAL - THIS SHEET

PAY ITEM	UNIT	QTY
UNDERGROUND CONDUIT, PVC, 2" DIA.	FOOT	52
UNIT DUCT, 600V, 2-1C NO.4, 1/C NO.6 GROUND, (XLP-TYPE USE), 1 1/4" DIA. POLYETHYLENE	FOOT	371
LUMINAIRE, SODIUM VAPOR, HORIZONTAL MOUNT, 250 WATT	EACH	2
LIGHT POLE FOUNDATION, 30" DIAMETER	FOOT	12
BREAKAWAY DEVICE, TRANSFORMER BASE, 15 INCH BOLT CIRCLE	EACH	2
LIGHT POLE, GALVANIZED STEEL, 40 FT. M.H., 15 FT. MAST ARM	EACH	2

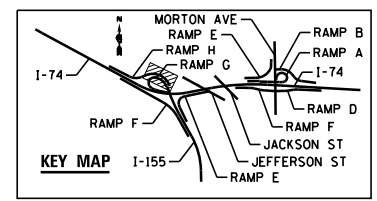

FILE NAME = ... \D468620-sh-t-1-155-RampG-light25.dgn	DESIGNED - BENESCH	REVISED -		STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	I-155 RAMP G LIGHTING PLANS	F.A.I. RTÉ.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
USER NAME = tblank	DRAWN - NLH	REVISED -				90-[14R;14HB-4,14,14HB]BRJ	TAZEWELL	2433	1738	
PLOT DATE = 9/5/2012	CHECKED - GHT	REVISED -				CONTRACT NO. 68620				
DATE - JULY 20, 2012	REVISED -	ILLINOIS FED. AID PROJECT								

SCALE: 1"=50' SHEET NO. 23 OF 138 SHEETS STA. 25+00 TO STA.