


**NOTES:**

1. ITEMS SHOWN ON THE BILL OF MATERIALS ON THIS SHEET ARE SHOWN FOR INFORMATION ONLY. ALL MATERIALS AND LABOR NECESSARY FOR THE CONSTRUCTION AND REMOVAL OF TEMPORARY LIGHTING ITEMS SHALL BE PAID FOR WITH THE BID ITEM "TEMPORARY LIGHTING SYSTEM".
2. ATTACH WEATHER HEAD TO PROPOSED LIGHTING UNIT FOR AERIAL CABLE CONNECTION. THE WEATHER HEAD SHALL BE REMOVED IN STAGE 14 WITH THE REMOVAL OF THE AERIAL CABLE. THE WEATHER HEAD AND AERIAL CABLE CONNECTION AND DISCONNECTION SHALL BE PAID WITH THE BID ITEM "TEMPORARY LIGHTING SYSTEM".
3. WOOD POLES SHALL BE EMBEDDED 20' BELOW EXISTING GRADE.
4. MULTI-MOUNT LUMINAIRES SHALL BE TILTED 25° OR AS DIRECTED BY THE ENGINEER.
5. PROPOSED LIGHTING SHALL BE INSTALLED AND OPERATIONAL PRIOR TO REMOVAL OF TEMPORARY LIGHTS.
6. MULTI-MOUNT LUMINAIRE SHALL BE REMOVED FOLLOWING THE INSTALLATION OF PROPOSED LIGHTING UNIT. WOOD POLE TO REMAIN.

**TEMPORARY LIGHTING SYSTEM - BILL OF MATERIAL - THIS SHEET**

PAY ITEM	UNIT	QTY
AERIAL CABLE, 2-1/8 NO. 2 WITH MESSENGER WIRE	FOOT	250

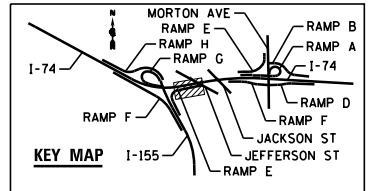

FILE NAME =	DESIGNED - BENESCH	REVISED -
...\\D468620-sh-1-74-TempStg04-light07.dgn	DRAWN - NLH	REVISED -
USER NAME = tblank	CHECKED - GHT	REVISED -
PLOT DATE = 9/5/2012	DATE - JULY 20, 2012	REVISED -



STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

TEMPORARY LIGHTING  
CONSTRUCTION STAGE 4

SCALE: 1"=50' SHEET NO. 66 OF 138 SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
90-114R(14HB-4,14,14HB)BR	TAZEWELL	ILLINOIS	2433	1781
			CONTRACT NO. 68620	
ILLINOIS FED. AID PROJECT				