


NOTES:

1. ITEMS SHOWN ON THE BILL OF MATERIALS ON THIS SHEET ARE SHOWN FOR INFORMATION ONLY. ALL MATERIALS AND LABOR NECESSARY FOR THE CONSTRUCTION AND REMOVAL OF TEMPORARY LIGHTING ITEMS SHALL BE PAID FOR WITH THE BID ITEM "TEMPORARY LIGHTING SYSTEM".
2. WOOD POLES SHALL BE EMBEDDED 20' BELOW EXISTING GRADE.
3. MULTI-MOUNT LUMINAIRES SHALL BE TILTED 25° OR AS DIRECTED BY THE ENGINEER.
4. TEMPORARY LIGHTING SHALL BE INSTALLED AND OPERATIONAL PRIOR TO REMOVAL OF EXISTING LIGHTS.

TEMPORARY LIGHTING SYSTEM – BILL OF MATERIAL – THIS SHEET

PAY ITEM	UNIT	QTY
LUMINAIRE, SODIUM VAPOR, MULTI-MOUNT, 400 WATT	EACH	0
LIGHT POLE, WOOD, 70 FOOT, CLASS 3	EACH	0
AERIAL CABLE, 4-1/8 NO. 2 WITH MESSENGER WIRE	FOOT	0

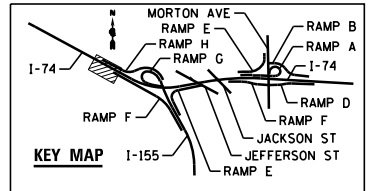

FILE NAME =	DESIGNED - BENESCH	REVISED -
...\\D468620-sh-1-74-TempStg14-light04.dgn	DRAWN - NLH	REVISED -
USER NAME = tblank	CHECKED - GHT	REVISED -
PLOT DATE = 9/5/2012	DATE - JULY 20, 2012	REVISED -



STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TEMPORARY LIGHTING
CONSTRUCTION STAGE 14

SCALE: 1"=50' SHEET NO. 97 OF 138 SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
90-114R(14HB-4,14,14HVB)BR	TAZEWELL	ILLINOIS	2433	1812
CONTRACT NO. 68620				