


CODE NO.	ITEM	UNIT	URBAN 001 FED / 002 STATE TOTAL 0021		IDOT DIST 1 HQ	ISP DIST 2	ISTHA M5 FACILITY	ISP DIST 5	ISTHA TOLL PLAZA 99	IDOT ETP BUILDING	DAN RYAN & WEST 33RD ST.	ISP DIST CHICAGO	IDOT BUILDING E	ISP DIST 15 / ISTHA HQ	IDOT TSC
67100100	MOBILIZATION	L SUM	1		0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	-	0.1	0.1
70100825	TRAFFIC CONTROL AND PROTECTION, STANDARD 701456	L SUM	1		-	-	-	-	-	-	1	-	-	-	-
70102630	TRAFFIC CONTROL AND PROTECTION, STANDARD 701601	L SUM	1		-	-	-	-	-	-	1	-	-	-	-
81017510	CONDUIT IN TRENCH, 1" DIA., COILABLE NON METALLIC CONDUIT	FOOT	150		-	-	-	-	-	-	150	-	-	-	-
81702450	ELECTRIC CABLE IN CONDUIT, 600V (XLP-TYPE USE) 3-1/C NO. 10	FOOT	150		-	-	-	-	-	-	150	-	-	-	-
81900200	TRENCH AND BACKFILL FOR ELECTRICAL WORK	FOOT	190		-	-	100	-	-	-	90	-	-	-	-
87900100	DRILL EXISTING FOUNDATION	EACH	1		-	-	-	-	-	-	1	-	-	-	-
87900200	DRILL EXISTING HANDHOLE	EACH	2		-	-	1	-	-	-	1	-	-	-	-
*X0322920	COMMUNICATIONS CABINET AND EQUIPMENT	EACH	1		-	-	-	-	-	-	1	-	-	-	-
*XX006614	MODIFY EXISTING CABINET EQUIPMENT AND APPURTENANCES	EACH	1		-	-	-	-	-	-	1	-	-	-	-
X0327322	CCTV SERVER UPGRADES	L SUM	1		1	-	-	-	-	-	-	-	-	-	-
X8101002	CONDUIT IN TRENCH, 2" DIA., PVC COATED RIGID GALVANIZED STEEL	FOOT	100		-	-	100	-	-	-	-	-	-	-	-
X0327323	ELECTRICAL WORK, IDOT ETP	L SUM	1		-	-	-	-	1	-	-	-	-	-	-
X0327324	ELECTRICAL WORK, IDOT BUILDING E	L SUM	1		-	-	-	-	-	-	-	1	-	-	-
X0327325	ELECTRICAL WORK, ISP DISTRICT 2	L SUM	1		-	1	-	-	-	-	-	-	-	-	-
X0327326	ELECTRICAL WORK, ISP DISTRICT 5	L SUM	1		-	-	-	1	-	-	-	-	-	-	-
X0327327	ELECTRICAL WORK, ISP DISTRICT 15	L SUM	1		-	-	-	-	-	-	-	-	-	1	-
X0327328	ELECTRICAL WORK, ISP DISTRICT CHICAGO	L SUM	1		-	-	-	-	-	-	-	1	-	-	-
X0327329	ELECTRICAL WORK, ISTHA M5	L SUM	1		-	-	1	-	-	-	-	-	-	-	-
X0327330	ELECTRICAL WORK, ISTHA PLAZA 99	L SUM	1		-	-	-	-	1	-	-	-	-	-	-
X8710036	FIBER OPTIC CABLE 12 FIBERS, SINGLE MODE	FOOT	1580		-	620	125	-	100	-	75	540	50	70	-
X0327331	FIBER CONNECTIVITY TO IDOT DAN RYAN CABINET	L SUM	1		-	-	-	-	-	-	1	-	-	-	-
X0327332	FIBER CONNECTIVITY TO IDOT DISTRICT 1	L SUM	1		1	-	-	-	-	-	-	-	-	-	-
X0327333	FIBER CONNECTIVITY TO ISTHA M5 FACILITY	L SUM	1		-	-	1	-	-	-	-	-	-	-	-
X0327334	FIBER CONNECTIVITY TO ISTHA PLAZA 99	L SUM	1		-	-	-	-	1	-	-	-	-	-	-
X0327335	FIBER CONNECTIVITY TO ISTHA HEADQUARTERS / ISP DISTRICT 15	L SUM	1		-	-	-	-	-	-	-	-	-	1	-
X0327336	MICROWAVE LINK 1 - ISP DISTRICT 2 TO ISTHA M5	L SUM	1		-	0.5	0.5	-	-	-	-	-	-	-	-
X0327337	MICROWAVE LINK 2 - ISP DISTRICT 5 TO ISTHA PLAZA 99	L SUM	1		-	-	-	0.5	0.5	-	-	-	-	-	-
X0327338	MICROWAVE LINK 3 - IDOT ETP TO DAN RYAN	L SUM	1		-	-	-	-	-	0.5	0.5	-	-	-	-
X0327339	MONOPOLE, 100 FOOT MOUNTING HEIGHT	EACH	1		-	-	-	-	-	-	1	-	-	-	-
X0327340	TOWER REINFORCEMENT, ISP DISTRICT 2	L SUM	1		-	1	-	-	-	-	-	-	-	-	-
X0327341	TOWER REINFORCEMENT, ISP DISTRICT 5	L SUM	1		-	-	-	1	-	-	-	-	-	-	-
X0327342	VIDEO WALL UPGRADES, IDOT DISTRICT 1	L SUM	1		1	-	-	-	-	-	-	-	-	-	-
X0327343	VIDEO WALL UPGRADES, IDOT TRAFFIC SYSTEMS CENTER	L SUM	1		-	-	-	-	-	-	-	-	-	-	1
X0327344	WAVEGUIDE ICE BRIDGE	L SUM	1		-	-	-	1	-	-	-	-	-	-	-
X0327345	WORKSTATION FURNITURE, IDOT DISTRICT 1	L SUM	1		1	-	-	-	-	-	-	-	-	-	-

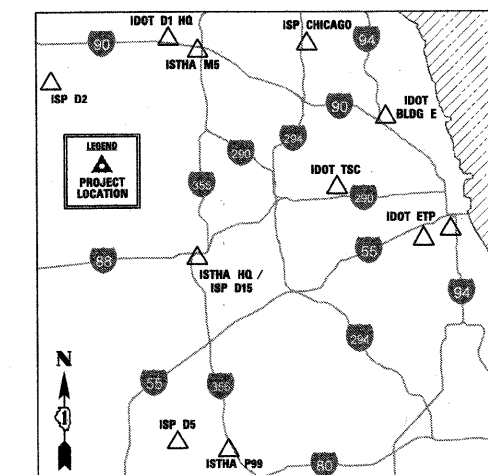

CHRISTOPHER B. BURKE ENGINEERING, LTD.
 9575 W. Higgins Road, Suite 600
 Rosemont, Illinois 60018
 (847) 823-0500

FILE NAME =	USER NAME = ADERICCO	DESIGNED <i>AJD</i>	REVISED -
N:\dot\B90122\Mech\B90122.S00.PLN.02.dwg		DRAWN <i>KWB</i>	REVISED -
		CHECKED <i>JPC</i>	REVISED -
		DATE <i>5/12/2011</i>	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**ITS CENTER-TO-CENTER INTEGRATION PROJECT
SUMMARY OF QUANTITIES**

SCALE: N.T.S. SHEET NO. OF SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	2009-0871	VARIES	17	2
CONTRACT NO. 60134			ILLINOIS FED. AID PROJECT	