


**NOTES:**





1. THE ACTUAL WIDTH OF THE SIDEWALK IS TO BE PLUS 0" TO 1/2" OF THE WIDTH SPECIFIED.
2. A 1/2" PREFORMED EXPANSION JOINT, CONFORMING TO THE EXACT CROSS-SECTION OF THE SIDEWALK, SHALL BE PLACED AT 50 FOOT INTERVALS AND AT THE END OF EACH POUR.
3. CONTRACTION JOINTS SHALL BE PLACED AT 5 FOOT INTERVALS.
4. THIS ITEM SHALL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQ. FT. FOR P.C.C. SIDEWALK OF THE THICKNESS SPECIFIED WHICH SHALL BE FULL COMPENSATION FOR ALL LABOR AND MATERIAL REQUIRED INCLUDING THE EXPANSION AND CONTRACTION JOINTS AS SPECIFIED, AND ANY MINOR TOUCH-UP EXCAVATION AND BACKFILLING NECESSARY TO CONSTRUCT THE SIDEWALK.
5. SEE STATE DETAILS IN CONTRACT DOCUMENTS FOR CONSTRUCTION OF RED PATTERNED HANDICAPPED RAMPS.
6. LONGITUDINAL SLOPE SHALL NOT EXCEED 5%.

**SIDEWALK DETAIL**

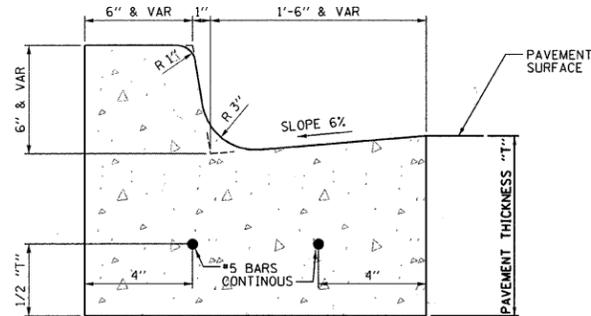


**CURB & GUTTER DETAIL**


SHOWING CONTINUOUS REINFORCEMENT  
SEE STD 606001 FOR ADDITIONAL INFORMATION

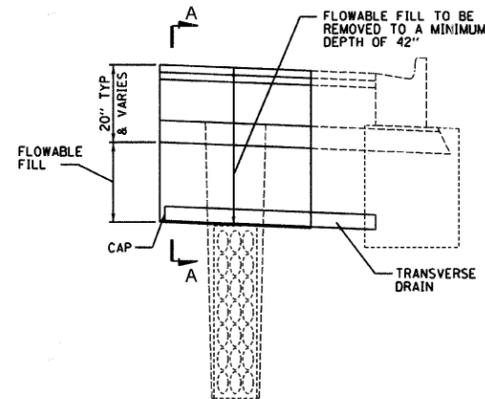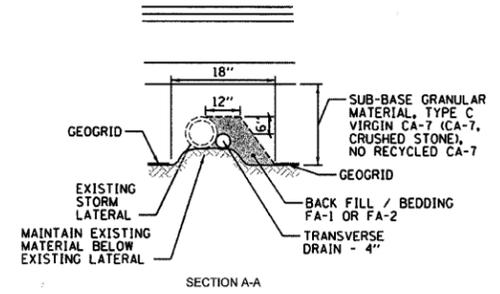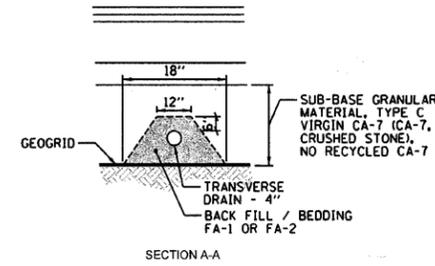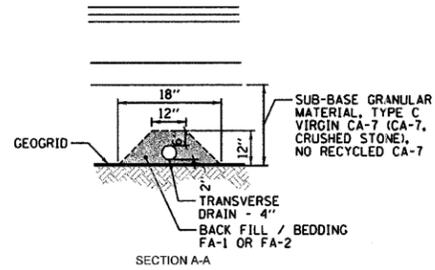

CASE I  
EXISTING STRUCTURE DEPTH ≥ 42" (3.5')

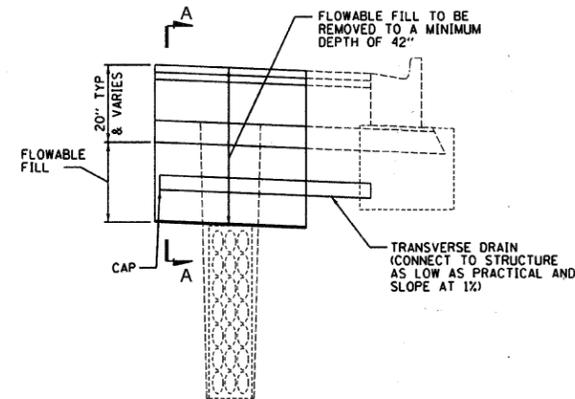

CASE II  
EXISTING STRUCTURE DEPTH < 42" (3.5')

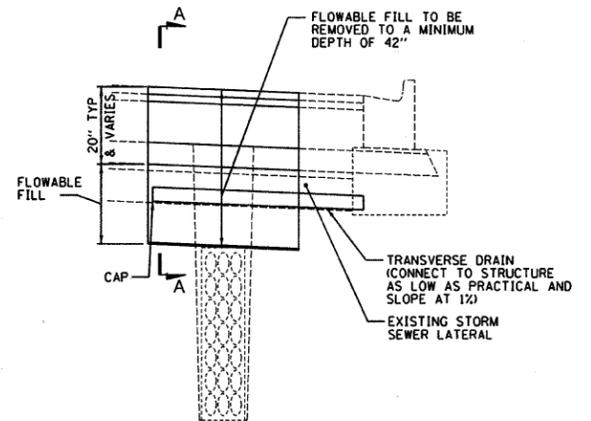

CASE III  
EXISTING STRUCTURE DEPTH < 42" (3.5')  
AND EXISTING SHALLOW STORM SEWER LATERAL

**SECTIONS AT TRANSVERSE DRAIN**

FILE NAME =	USER NAME = USER	DESIGNED - J.W.	REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>CONSTRUCTION DETAILS</b>	F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
ns\dgn\bb\bb24boughtondresurfacing\sh	sts\BB24ConstructionDetails.dgn	DRAWN - G.R.	REVISED -			3586	11-00056-00-RS	WILL	35	24
PLOT SCALE = 1/8" = 1'-0"	CHECKED - E.J. / D.R.	REVISED -	REVISED -			CONTRACT NO. 63621				
PLOT DATE = 7/20/2011	DATE -	REVISED -	REVISED -			ILLINOIS FED. AID PROJECT				
				SCALE: NONE SHEET NO. 24 OF 35 SHEETS STA. TO STA.						