

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

EAST EDGE OF SHOULDER

Location	Station	Offset	Theoretical Grade Elevations
Bk. S. Abut.	623+54.50	-18.00	465.16
A	623+64.50	-18.00	465.21
B	623+74.50	-18.00	465.28
End S. Appr. Slab	623+84.50	-18.00	465.35

EAST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
Bk. S. Abut.	623+54.50	-12.00	465.28
A	623+64.50	-12.00	465.34
B	623+74.50	-12.00	465.40
End S. Appr. Slab	623+84.50	-12.00	465.47

℄ ROADWAY, PG, AND STAGE CONSTRUCTION LINE


Location	Station	Offset	Theoretical Grade Elevations
Bk. S. Abut.	623+54.50	0.00	465.47
A	623+64.50	0.00	465.53
B	623+74.50	0.00	465.59
End S. Appr. Slab	623+84.50	0.00	465.66

WEST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
Bk. S. Abut.	623+54.50	12.00	465.28
A	623+64.50	12.00	465.34
B	623+74.50	12.00	465.40
End S. Appr. Slab	623+84.50	12.00	465.47

WEST EDGE OF SHOULDER

Location	Station	Offset	Theoretical Grade Elevations
Bk. S. Abut.	623+54.50	18.00	465.16
A	623+64.50	18.00	465.21
B	623+74.50	18.00	465.28
End S. Appr. Slab	623+84.50	18.00	465.35

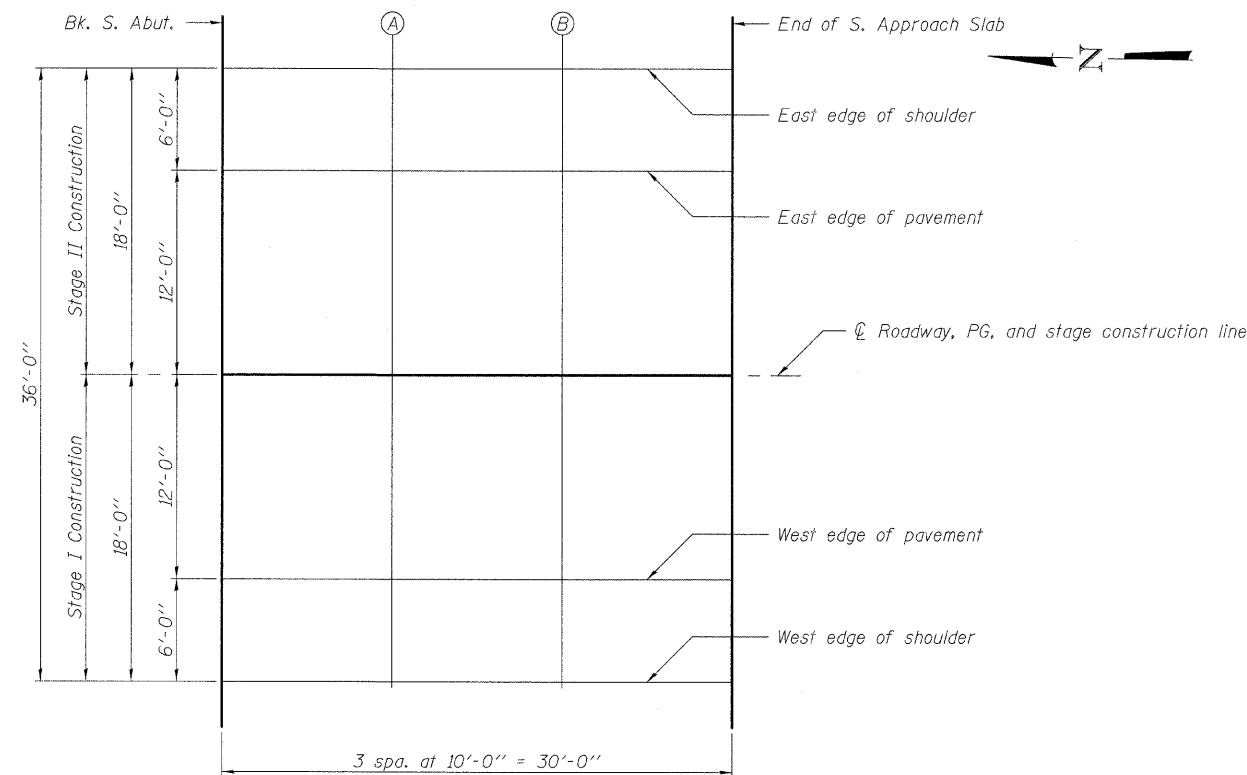

PLAN

TOP OF SOUTH APPROACH
SLAB ELEVATIONS
STRUCTURE NO. 014-0079

DESIGNED	KAK
CHECKED	EML
DRAWN	KAK
CHECKED	EML

E-AS

11-1-09

**HORNER &
SHIFRIN, INC.
ENGINEERS**

SHEET NO. 10 25 SHEETS	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	690	481B	CLINTON	46	27
			CONTRACT NO. 76C21		
FED. ROAD DIST. NO.		ILLINOIS FED. AID PROJECT			