

OUTSIDE DIA. PLUS 6" (150)

(ALONG SLOPE)

DETAIL OF RE-BARS

END VIEW

(150)

6" (150)

PIPE DRAIN

ELEVATION

HEADWALL FOR BACKSLOPE OUTLET

DETAIL "A'

WELDED WIRE FABRIC

PROPOSED PIPE


DRAIN

CONCRETE COLLAR

DETAIL "B"

EXISTING FIELD TILE OR
PROPOSED STORM SEWER, SPECIAL
OR STORM SEWER, PROTECTED

CLASS SI COLLAR DETAIL "C"



INSPECTION WELL (DETAIL "D")

PIPE TEE-

CLASS SI CONCRETE COLLAR

(150)

CONCRETE SLAB (SEE DETAIL "F" AND NOTE 7)
COVER OVER PIPE FROM 13" (330) TO 24" (600)

TRENCH BACKFILL

REQUIRED

PAVED DITCH SECTION

COVER OVER PIPE

FROM 6" (150) TO

13" (330)

METHOD 'B' (2 LANE)

(600)

(150)

#4 (10) RE-BARS @ ± 3" (75) CTS. BEND TO FIT

900000

SIDE VIEW

(150)

SIDE

END VIEW


- PIPE TEE

DETAIL "B"


CLASS SI CONCRETE COLLAR

GENERAL NOTES


- 1. EXISTING FIELD TILE ENCOUNTERED BY EXPLORATION TRENCH SHALL BE INSPECTED BY THE ENGINEER FOR UNOBSTRUCTED FLOW WITHIN THE LIMITS OF THE RIGHT-OF-WAY.
- 2. ONLY FIELD TILE THAT DOES NOT HAVE SATISFACTORY FLOW AND OR HAS VISIBLE SIGNS OF DETERIORATION (SINK HOLES, ETC.) SHALL BE REPLACED WITHIN THE LIMITS OF THE RIGHT-OF-WAY IN ACCORDANCE
- 3. INSPECTION WELLS SHALL BE CONSTRUCTED APPROXIMATELY 6" (150 mm) INSIDE OF BOTH RIGHT-OF-WAY LINES AT ALL FIELD TILE LOCATIONS.
- 4. EXISTING FIELD TILE ABANDONED UNDER EXISTING PAVEMENTS OR PAVED SHOULDERS SHALL BE_FILLED_WITH FLOWABLE GROUT AS DIRECTED BY THE ENGINEER. THIS WORK WILL BE PAID FOR ACCORDING TO ARTICLE 109.04.
- 5. NON-CIRCULAR FIELD TILE SHALL BE REPLACED WITH STORM SEWER, SPECIAL OF AT LEAST THE SAME CROSS SECTIONAL AREA. ALL EXISTING FIELD TILE SHALL BE REPLACED WITH STORM SEWER OF THE TYPE REQUIRED FOR THE MINIMUM DEPTH OF COVER.
- 6. THE 6" (150 mm) CONCRETE SLAB OR DITCH LINING SHALL BE POURED THE LENGTH OF THE TRENCH AT ALL DITCH FLOW LINE LOCATIONS WITHIN THE RIGHT-OF-WAY WITH LESS THAN 2' (600 mm) OF EARTH COVER. MISCELLANEOUS CONCRETE SHALL BE USED ACCORDING TO SECTION 611.
- 7. ALL MISCELLANEOUS SLABS, APRONS AND DITCH LININGS SHALL BE REINFORCED WITH WELDED WIRE FABRIC AS SHOWN FOR PAVED DITCH
- 8. HEADWALL FOR BACKSLOPE OUTLET MAY BE USED FOR PIPE DRAIN DIAMETERS UP TO 10" (250 mm). SPECIAL DESIGNS WILL BE REQUIRED
- 9. THE INSPECTION WELL LID FOR P.C.C. PIPE SHALL BE CONSTRUCTED OF 3/8" (10 mm) CAST IRON AND PROVIDED WITH A 1" (25 mm) DIAMETER HOLE IN CENTER. THE LID FOR THE OTHER PIPE MATERIALS SHALL BE A GRATE ASSEMBLY PREFABRICATED FOR AND COMPATIBLE WITH THE PIPE SYSTEM.

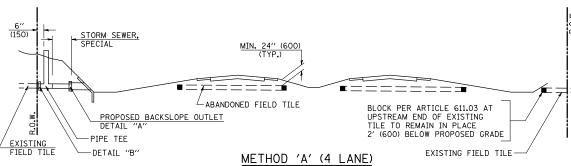



STORM SEWER FLOW LINE ABOVE PROPOSED DITCH FLOW LINE

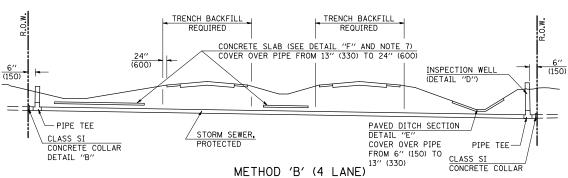

STORM SEWER LESS THAN 2' (600 mm) BELOW DITCH FLOW LINE AND STORM SEWERS CROSSING UNDER PAVEMENTS AND PAVED DITCHES

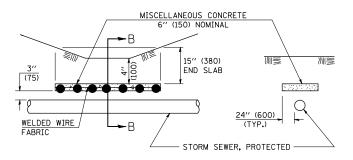

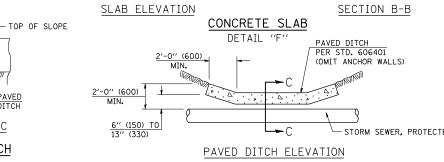



Note: All dimensions are in INCHES (millimeters) unless otherwise shown.

| DISTRICT | 5 | DETAIL | NO. | 61101011 |
|----------|---|---------------|-----|----------|
| | _ | | | |

75 23

| FILE NAME = | USER NAME = stultsjw | DESIGNED | - | REVISED | - | 11/06 |
|---|-------------------------------|----------|---|---------|---|-------|
| c:\pw_work\PWIDOT\STULTSJW\d0158664\D570429-sht-details.dgn | | DRAWN | - | REVISED | - | |
| | PLOT SCALE = 100.00000 '/ IN. | CHECKED | - | REVISED | - | |
| | PLOT DATE = 8/17/2009 | DATE | - | REVISED | - | |

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

SECTION COUNTY FIELD TILE SYSTEMS (TREATMENT OF EXISTING) (121BR)BR DEWITT CONTRACT NO. 70429 SHEET NO. 1 OF 1 SHEETS

SECTION C-C

PAVED DITCH

DETAIL "E"

SCALE: