RTE. NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
4th ST	05-00014-00-BR	HANCOCK	20	1
STA. 12+50 TO STA. 15+16.90				
FED. ROAD DIST.	ILLINOIS	FED. AID PROJECT		

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

PLANS FOR PROPOSED HIGHWAY BRIDGE PROGRAM

4TH STREET
SECTION 05-00014-00-BR
DALLAS CITY - HANCOCK COUNTY
PROJECT NO. BROS-0067(136)
JOB NO. C-96-218-09

INDEX OF SHEETS

SHEET NO.	DESCRIPTION
1	COVER SHEET
2	TYPICAL SECTIONS AND SUMMARY OF QUANTITIES
3-5	SCHEDULE OF QUANTITIES
6	ROW PLAN
7	PLAN AND PROFILE
8-11	CROSS SECTIONS
12	CULVERT GENERAL PLAN & ELEVATION
13	CULVERT LAYOUT
14	CULVERT DETAILS
15	WINGWALL DETAILS
16	MISC CULVERT DETAILS
17-19	MISC CONSTRUCTION DETAILS
20	TEMPORARY ACCESS SIDEWALK DETAILS

HIGHWAY STANDARDS

280001-04	TEMPORARY EROSION CONTROL SYSTEMS
424001-05	CURB RAMPS FOR SIDEWALKS
515001-03	NAME PLATE FOR BRIDGES
602301-02	INLET - TYPE A
604066-02	FRAME AND LID, TYPE 15
606001-04	CONCRETE CURB TYPE B AND COMBINATION CONCRETE CURB AND GUTTER
664001-02	CHAIN LINK FENCE
667101-01	PERMANENT SURVEY MARKERS
701301-03	LANE CLOSURE, 2L, 2W SHORT TIME OPERATIONS
701801-04	LANE CLOSURE MULTILANE, 1W OR 2W CROSSWALK OR SIDEWALK CLOSURE
701901-01	TRAFFIC CONTROL DEVICES
720006-02	SIGN PANEL ERECTION DETAILS
720011-01	METAL POSTS FOR SIGNS, MARKERS AND DELINEATORS
729001-01	APPLICATIONS OF TYPES A AND B METAL POSTS (FOR SIGNS AND MARKERS)
BLR 26-1	STEEL PLATE BEAM GUARDRAIL (27½" HEIGHT)

UTILITIES

AMEREN CIPS
FRONTIER COMMUNICATIONS
LIGHTCORE (DIGITAL TELEPORT)
DALLAS CITY WATER AND SEWER
CONSOLIDATED UTILITY SERVICES
MCDONOUGH TELEPHONE CO-OP
NICOR GAS
BUCKEYE PARTNERS
MEDIACOM MIDWEST LLC

TOLL FREE JOINT UTILITY LOCATING
INFORMATION FOR EXCAVATORS (J.U.L.I.E.)
TELEPHONE NUMBER 1-800-892-0123
OR 811

PLAN	0	20'	40'	80'
PROFILE HORIZ.	0	20'	40'	80'
PROFILE VERT.	0	2'	4'	8'
CROSS SECTION HORIZ.	0	5'	10'	20'
CROSS SECTION VERT.	0	5'	10'	20'

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS MAY NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

CONTRACT NO. 93497

EXISTING STRUCTURE:
STA. 13+83
CLOSED ABUTMENT BRIDGE
36' LONG ON 45° SKEW, L.A.
S.N. 034-6027

PROPOSED STRUCTURE:
STA 13+89
DOUBLE 11'x10' BOX CULVERT
46' LONG ON 15° SKEW, L.A.
SN 034-6028

IMPROVMENT BEGINS
STA 12+50.00

IMPROVEMENT ENDS
STA 15+16.90

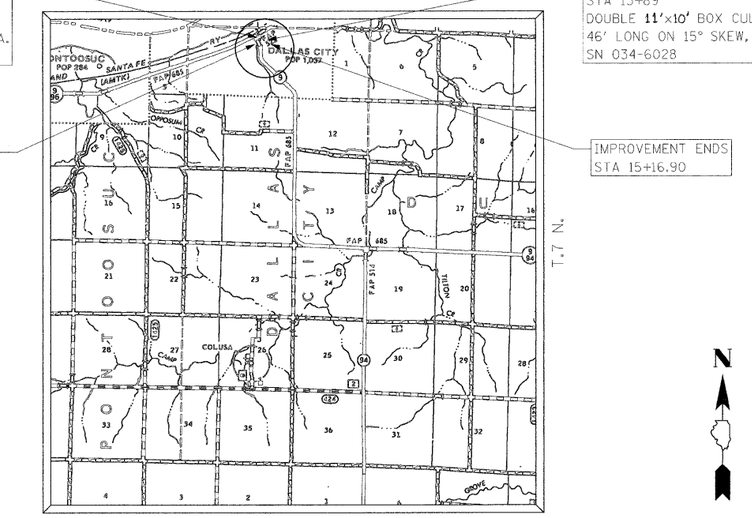

LOCATION MAP

0 1 mi 2 mi 3 mi

TOTAL AND NET LENGTH OF PROJECT = 266.90 FT = 0.051 MI
10' X 11' TWIN BOX CULVERT

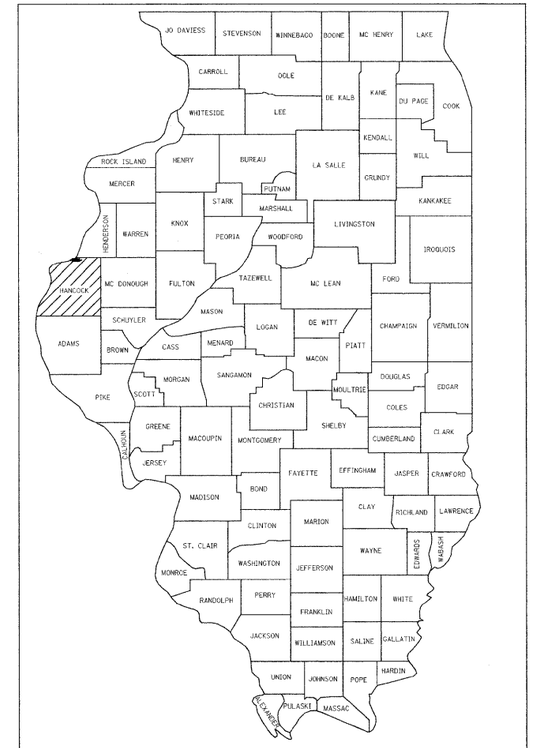

LOCATION OF SECTION INDICATED THUS: -

APPROVED Ruth A Wiginton 9/22 2009
MAYOR - DALLAS CITY

PASSED August 26 2009
DISTRICT SIX ENGINEER OF LOCAL ROADS & STREETS

PASSED August 25 2009
DISTRICT SIX ENGINEER OF CONSTRUCTION

RELEASING FOR BID BASED ON LIMITED REVIEW: August 26 2009
DEPUTY DIRECTOR OF HIGHWAYS, REGION FOUR ENGINEER

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

ROADWAY CLASSIFICATION:	LOCAL STREET
ADT:	398
DESIGN SPEED:	30 MPH
DESIGN GUIDELINES:	URBAN

PRINTED BY AUTHORITY OF THE STATE OF ILLINOIS

CHARLES S. BACH, JR.
REGISTERED PROFEESIONAL ENGINEER
STATE OF ILLINOIS NO. 062-32351
LICENSE EXPIRES NOVEMBER 30, 2009

Charles S Bach 5/28/09
CHARLES S. BACH, JR. DATE

SEAL: CHARLES S. BACH, JR. 062-32351 REGISTERED PROFESSIONAL ENGINEER ILLINOIS

PLANS PREPARED BY:
PSBA
POEPPING, STONE, BACH & ASSOCIATES, INC.
100 SOUTH 54TH STREET QUINCY, ILLINOIS 62306
PH.: (217) 223-4605 FAX: (217) 223-1546
E-MAIL: PSBA@PSBA.COM WWW.PSBA.COM

PLAN: DATE | BY | SURVEYED | PLOTTED | ALIGNMENT CHECKED | GRADES CHECKED | NO PLAN REVISIONS | STRUCTURE NOTATIONS CHKD | NOTE BOOK | NO.
PROFILE: DATE | BY | SURVEYED | PLOTTED | GRADES CHECKED | NO PROFILE REVISIONS | STRUCTURE NOTATIONS CHKD | NOTE BOOK | NO.