
11-06-2026 LETTING ITEM 109

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	22-00019-00-SW	EFFINGHAM	##	1
		ILLINOIS		

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
SAFE ROUTES TO SCHOOL

SECTION 22-00019-00-SW
JOB NO. C-97-019-25
PROJECT NO. SYN8(608)
VILLAGE OF TEUTOPOLIS
EFFINGHAM COUNTY, ILLINOIS
CONTRACT 95979

FOR INDEX OF SHEETS
SEE SHEET 2

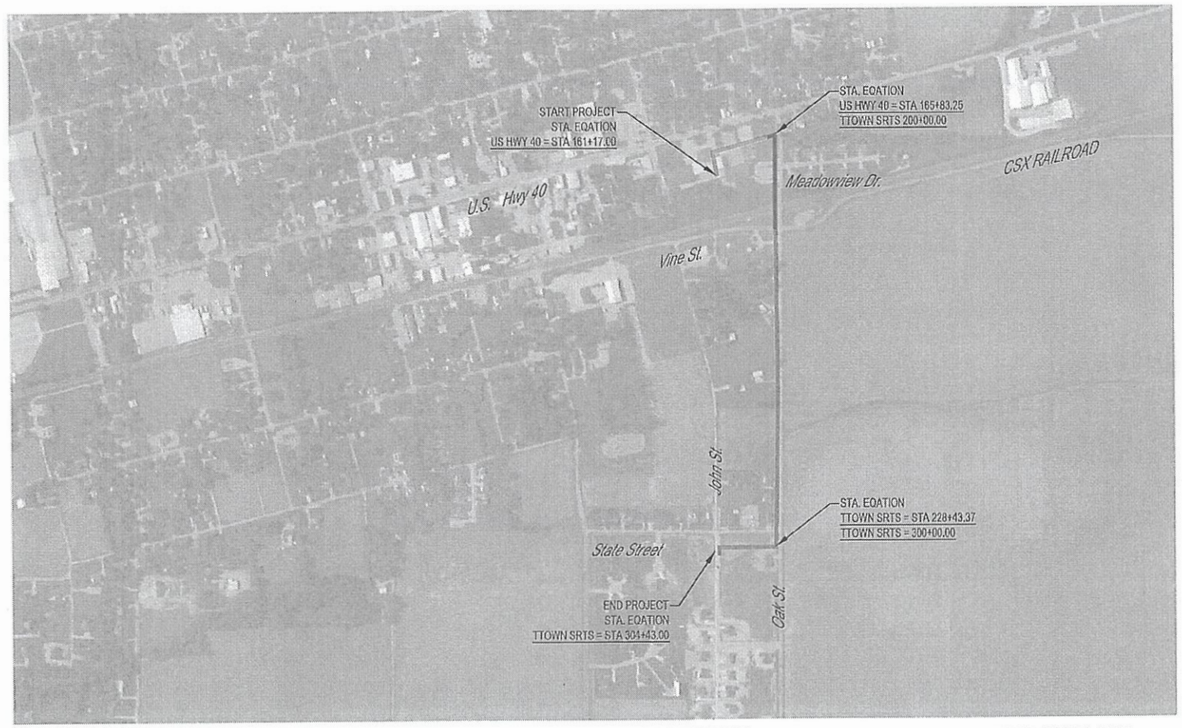

N



LOCATION OF SECTION INDICATED THUS:

PLAN 0 20 40
PROFILE (HORIZONTAL) 0 20 40
PROFILE (VERTICAL) 0 5 10
CROSS SECTIONS (HORIZONTAL) 0 10 20
CROSS SECTIONS (VERTICAL) 0 5 10

DESIGN STAGE J.U.L.I.E. DIG NUMBER
DIG # A222494449

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123

UTILITY NOTE

THE LOCATIONS OF THOSE BURIED AND ABOVEGROUND UTILITIES SHOWN ARE APPROXIMATE, ARE SHOWN FOR CONTRACTOR INFORMATIONAL USE ONLY, AND ARE NOT TO BE REFERENCED FOR CONSTRUCTION PURPOSES. THE IMPLIED PRESENCE OR ABSENCE OF UTILITIES IS NOT TO BE CONSTRUED BY THE OWNER, ENGINEER, CONTRACTOR, OR SUBCONTRACTORS TO BE AN ACCURATE AND COMPLETE REPRESENTATION OF UTILITIES THAT MAY OR MAY NOT EXIST ON THE CONSTRUCTION SITE. BURIED AND ABOVEGROUND UTILITY LOCATION, IDENTIFICATION, AND MARKING ARE THE SOLE RESPONSIBILITY OF THE CONTRACTOR. REROUTING, DISCONNECTION, PROTECTION, ETC. OF ANY UTILITIES MUST BE COORDINATED BETWEEN THE CONTRACTOR, UTILITY COMPANY, AND OWNER. SITE SAFETY, INCLUDING THE AVOIDANCE OF HAZARDS ASSOCIATED WITH BURIED AND ABOVEGROUND UTILITIES, REMAIN THE SOLE RESPONSIBILITY OF THE CONTRACTOR. CONTRACTOR MUST CONTACT J.U.L.I.E. 48 HOURS PRIOR TO THE BEGINNING OF CONSTRUCTION.

Contract No. 95979

US HIGHWAY 40
FUNCTIONAL CLASSIFICATION - MINOR ARTERIAL
ADT (2021 Highest data) - 4,650 vpd
Design Speed = 35 mph

SOUTH OAK STREET
FUNCTIONAL CLASSIFICATION - Local Road/Street
ADT (2018 data) - 400 vpd
Design Speed = 30 mph

STATE STREET
FUNCTIONAL CLASSIFICATION - Local Road/Street
ADT (2018 data) - 200 vpd
Design Speed = 30 mph

LOCATION MAP
VILLAGE OF TEUTOPOLIS

LENGTH OF PROJECT
NET IMPROVEMENT PROPOSED SIDEWALK LENGTH = 2,945 FEET (0.56 MILES)
TOTAL IMPROVEMENT PROPOSED SIDEWALK LENGTH = 3,292 FEET (0.62 MILES)

EXISTING ADA SIDEWALK (537 LF)
PROPOSED ADA SIDEWALK (2,590 LF)
PROPOSED ADA SIDEWALK BY VILLAGE 2025 (703 LF)

APPROVED _____ 8-5-24 DATE
VILLAGE PRESIDENT, VILLAGE OF TEUTOPOLIS

PASSED 08/25/24 DATE
DISTRICT SEVEN ENGINEER OF LOCAL ROADS & STREETS

Releasing For Bid Based on Limited Review 08/25/24 DATE
REGION FOUR ENGINEER
STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

LICENSED PROFESSIONAL ENGINEER
MITCHEL J. HARDIEK
062-077560
STATE OF ILLINOIS

Mitchel J. Hardiek P.E. No. 77560
My License Expires 11-30-27

FINAL
PLANS DATED: July 23rd, 2026

BY	DATE	REVISIONS
SRS	8/8/2025	IDOT COMMENTS - 8/8/25

FIELD BOOK 818
DRAWN BY MJH
CHECKED BY LRS
FILE LOCATION S:\2021\21274\ENGR\TITLE SHEET.DWG
SAVE DATE 7/24/2025 12:00

MILANO & GRUNLOH ENGINEERS, LLC
114 W. WASHINGTON AVE | PO BOX 697
EFFINGHAM, IL 62401
Phone: (217) 347-7262 | (800) 677-2714
Email: mgengineers@mgengineers.com
Web: www.mgengineers.com
Design Firm #184-003108

TITLE SHEET
SAFE ROUTES TO SCHOOL
22-00019-00-SW
TEUTOPOLIS, ILLINOIS

SHEET # 1 OF 10
JOB # 21274

CN 95979

INDEX OF SHEETS

1	TITLE SHEET
2	INDEX OF SHEETS AND STANDARDS & GENERAL NOTES SHEET
3	TYPICAL DETAILS
4	SUMMARY OF QUANTITIES
5	SCHEDULE OF QUANTITIES
6	TYPICAL SECTIONS
7	BENCHMARK AND ALIGNMENT SHEET
8-10	SIDEWALK PLAN SHEETS

LEGEND

●	IRON PIN SET
○	IRON PIN FOUND
	TREE (DECIDUOUS)
	FIRE HYDRANT
	WATER METER
	VALVE (GAS OR WATER)
	GAS METER
GAS	GAS MARKER
T	TELEPHONE PEDESTAL
	POWER POLE
	GUY ANCHOR
E	ELECTRIC PEDESTAL
EM	ELECTRIC METER
	SIGN
B	BOLLARD
	WOOD POST
	SANITARY MANHOLE
	SANITARY SEWER
	STORM SEWER
T	EXISTING TELE-COMMUNICATIONS LINE
FO	EXISTING FIBER OPTIC LINE
x 100.00	PROPOSED ELEVATION
x 100.00	EXISTING ELEVATION
x 100.00 (M.E.)	(MATCH EXISTING GRADE)
IP	INLET PROTECTION
PP	PIPE PROTECTION
SF	SILT FENCE
	RIP RAP
	DETECTABLE WARNING
	4" PCC SIDEWALK
	6" PCC DRIVEWAY PAVT
	6" PCC SIDEWALK
	INCIDENTAL HMA
	AGGREGATE SURFACE COURSE

GENERAL NOTES

1. Pavement grades shown are at the top of pavement surfaces, unless otherwise noted in the plans.

2. Erosion control measures shall be in accordance with IDOT Specifications. Placement shall be directed by the Engineer.

3. All elevations refer to U.S.G.S. mean sea level datum. - NAVD 88

4. Any reference to a standard in the plans shall be interpreted to mean the edition as indicated by the sub-number listed on Sheet 2.

5. Before ordering storm sewers, pipe culverts or pipe drains, the Contractor shall consult the Engineer for exact lengths.

6. CURB AND GUTTER, WALKS, SLABS, AND PCC DRIVEWAY PAVEMENT

A. Concrete curb and gutter shall be in accordance with IDOT Std. Spec. Locate contraction joints at 20 ft on center, unless otherwise shown. Locate expansion joints at minimum 100 ft. on center, unless otherwise shown.

B. Concrete walks shall be in accordance with IDOT Std. Spec. Unless otherwise shown, locate sidewalk contraction joints at 5 ft on center and expansions joints at 50 ft on center, unless otherwise shown, locate contraction joints in larger slabs at 15 ft intervals in each direction.

C. Concrete walks crossing through entrances shall be constructed in accordance with the detail shown on sheet 3. Monolithically constructed sidewalks will not be allowed if greater than 2% cross slope.

D. Dowel bars shall be used when Portland Cement Concrete Driveways are placed adjacent to any existing concrete. The dowel bars shall be 1.5 feet in length and shall be placed on 1 foot centers. Dowel bars shall not be paid for separately but shall be included in the price of the of the Portland Cement Concrete Driveway of the type and depth specified.

7. The following rates of application or units were used for calculating plan quantities:

- Bituminous Materials (Tack Coat) - 0.05 LB/SQ FT
- Aggregate Surface Course (type B), Rock Fill, Aggregate Temporary Access - 2.05 Tons/Cu Yd
- Hot Mix Asphalt Surface Course, Mix "C", N70 - 2.02 Tons/Cu Yd
- Rip Rap - 110 lbs/ Cu Ft

8. Abbreviations:
Abbreviations are per IDOT's Coded Pay Item Listing found at: idot.illinois.gov (Search: IDOT Coded Pay Items)
Other Common Abbreviations:

- BKCB - Back of Curb
- EOP - Edge of Pavement
- BKSW - Back of Sidewalk
- FL - Flowline
- PCBC - Precast Concrete Box Culvert
- PCC - Portland Concrete Cement
- HMA - Hot-Mix Asphalt
- REM - Remove
- REL - Relocate

STANDARDS

280001-07	Temporary Erosion Control Systems
424001-12	Perpendicular Curb Ramps for Sidewalks
424016-06	Mid-Block Cub Ramps for Sidewalks
424021-07	Depressed Corner for Sidewalks
424026-04	Entrance/Alley Pedestrian Crossings
606001-09	Concrete Curb Type B and Combination Concrete Curb and Gutter
701001-02	Off-Road Operations, 2L, 2W, More Than 15' (4.5 m) Away
701006-05	Off-Road Operations, 2L, 2W, 15' (4.5 m) to 24" (600 mm) from Pavement Edge
701011-04	Off-Road Moving Operations, 2L, 2W, Day Only
701301-04	Lane Closure, 2L, 2W, Short Time Operations
701501-06	Urban Lane Closure, 2L, 2W, Undivided
701801-06	Sidewalk, Corner or Crosswalk Closure
701901-11	Traffic Control Devices

ROUTE NO. | SECTION: 22-00019 00-SW | COUNTY: EFFINGHAM | ILLINOIS
FED. ROAD DIST. NO. 7 | FED. AID PROJECT:

FIELD BOOK: 818
DRAWN BY: JCS
CHECKED BY: MJH
FILE LOCATION: S:\2021\21274\DWG\TITLE SHEET.DWG
PLOT DATE: Tuesday, August 25, 2026 9:55:26 AM

MILANO & GRUNLOH ENGINEERS, LLC
114 W. WASHINGTON AVE. | PO BOX 897
EFFINGHAM, IL 62401 | (800) 677-2714
Phone: (217) 347-7262
Email: mgengineers@mgengineers.com
Web: www.mgengineers.com
Design Firm #184-003108


INDEX OF SHEETS, GENERAL NOTES, & STANDARDS

SAFE ROUTES TO SCHOOL
22-00019-00-SW
TEUTOPOLIS, ILLINOIS

SHEET # 2 OF 10


JOB # 21274

CN 95979

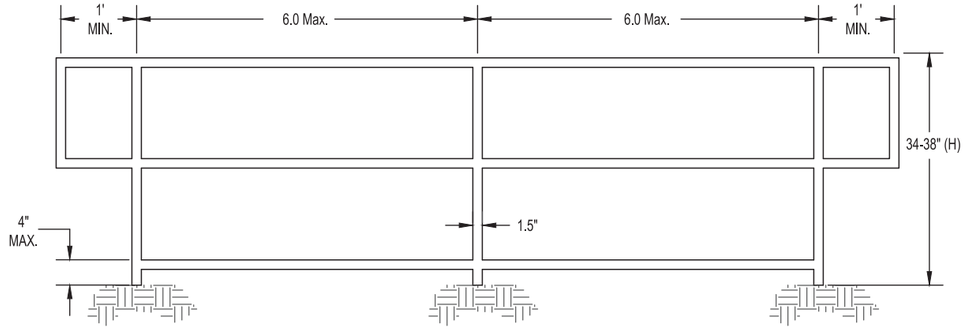


PIPE HANDRAIL TYPICAL SECTION

** The handrail shall be designed to withstand a 200 pound load applied in any direction to the top rail. Vertical posts shall be equally spaced along the panel at no more than 6 feet. The railing shall have three equally spaced horizontal elements, with the top of the lowest beam being no more than 4" off of the proposed surface. Extensions shall be placed a 1 foot beyond vertical edge of top and bottom steps and 1 foot beyond bottom of proposed ramps.The handrail shall be powder coated black. This work shall be paid for by the Contract Unit Price per FOOT for PIPE HANDRAIL and no additional compensation shall be allowed.



PIPE HANDRAIL BASE PLATE DETAIL

(TYPICAL AT ALL HANDRAIL LOCATIONS)

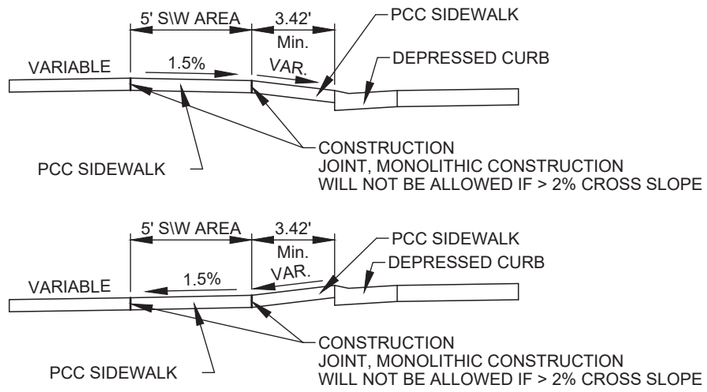

DETAIL OF SIDEWALK THROUGH ENTRANCES

ROUTE NO. | SECTION | COUNTY
22-00019 | 00-SW | EFFINGHAM
FED. ROAD DIST. NO. 7 | ILLINOIS
FED. AID PROJECT:

FIELD BOOK: 81B
DRAWN BY: JCS
CHECKED BY: MJH
FILE LOCATION: S:\2021\21274\DWG\TITLE SHEET.DWG
PLOT DATE: Tuesday, August 25, 2026 9:55:31 AM

MILANO & GRUNLOH ENGINEERS, LLC
114 W. WASHINGTON AVE. | PO BOX 897
EFFINGHAM, IL 62401
Phone: (217) 347-7262 | (800) 677-2714
Email: mgengineers@mgengineers.com
Web: www.mgengineers.com
Design Firm #184-003108

TYPICAL DETAIL SHEET

SAFE ROUTES TO SCHOOL
22-00019-00-SW
TEUTOPOLIS, ILLINOIS

SHEET # 3 OF 10

JOB # 21274

CN 95979

	ITEM NO	ITEM	UNIT	QUANTITY
	28000500	INLET AND PIPE PROTECTION	EACH	17
	42300200	PORTLAND CEMENT CONCRETE DRIVEWAY PAVEMENT, 6 INCH	SQ YD	285
	42400100	PORTLAND CEMENT CONCRETE SIDEWALK 4 INCH	SQ FT	10,720
	42400300	PORTLAND CEMENT CONCRETE SIDEWALK 6 INCH	SQ FT	1,172
	42400410	PORTLAND CEMENT CONCRETE SIDEWALK 8 INCH	SQ FT	200
	42400800	DETECTABLE WARNINGS	SQ FT	20
	44000200	DRIVEWAY PAVEMENT REMOVAL	SQ YD	94
	44000600	SIDEWALK REMOVAL	SQ FT	4,395
	50901760	PIPE HANDRAIL	FOOT	100
*	56400400	FIRE HYDRANTS TO BE RELOCATED	EACH	1
*	60265700	VALVE VAULTS TO BE ADJUSTED	EACH	2
	67100100	MOBILIZATION	L SUM	1
	X2020410	EARTH EXCAVATION (SPECIAL)	CU YD	99
	X2500900	SEEDING, CLASS 1 (SPECIAL)	ACRE	0.75
	X7010216	TRAFFIC CONTROL AND PROTECTION, (SPECIAL)	L SUM	1

* SPECIALTY ITEM

ROUTE NO. | SECTION: 22-00019 00-SW | COUNTY: EFFINGHAM | ILLINOIS
FED. ROAD DIST. NO. 7 | FED. AID PROJECT:

FIELD BOOK: 81B
DRAWN BY: JCS
CHECKED BY: MJH
FILE LOCATION: S:\2021\21274\DWG\TITLE SHEET.DWG
PLOT DATE: Tuesday, August 25, 2026 9:55:35 AM

MILANO & GRUNLOH ENGINEERS, LLC
114 W. WASHINGTON AVE. | PO BOX 897
EFFINGHAM, IL 62401
Phone: (217) 347-7262 | (800) 677-2714
Email: mgengineers@mgengineers.com
Web: www.mgengineers.com
Design Firm #184-003108

SUMMARY OF QUANTITIES

SAFE ROUTES TO SCHOOL
22-00019-00-SW
TEUTOPOLIS, ILLINOIS

SHEET # 4 OF 10

JOB # 21274

CN 95979

REMOVAL			
STATION	OFFSET	DRIVEWAY PAVEMENT REMOVAL	SIDEWALK REMOVAL
		44000200	44000600
		SQ YD	SQ FT
OAK STREET			
208+15.23 - 208+65.23	24.80 - 45.45 RT		268
208+87.61 - 210+39.83	18.46 - 29.85 RT		653
210+51.94 - 211+17.75	18.50 - 22.65 RT		253
211+33.64 - 213+18.46	18.60 - 22.10 RT		739
224+42.55 - 225+17.28	26.39 - 30.05 RT		286
225+17.28 - 225+39.25	26.16 - 30.05 RT	9	
225+39.25 - 226+18.52	26.16 - 30.03 RT		305
226+18.52 - 226+42.56	26.30 - 30.03 RT	13	
226+42.56 - 228+01.75	26.30 - 30.25 RT		606
STATE STREET			
300+26.24 - 300+80.47	22.99 - 42.61 RT		224
300+80.43 - 300+97.07	21.86 - 31.17 RT	17	
300+96.92 - 301+78.20	22.42 - 25.93 RT		333
307+78.20 - 302+12.10	21.98 - 25.71 RT	40	
302+11.96 - 303+58.45	21.65 - 26.60 RT		579
303+58.51 - 303+79.24	22.73 - 26.88 RT	15	
303+79.27 - 304+19.00	23.05 - 27.20 RT		149
TOTALS		94	4395

PAVEMENT					
STATION	OFFSET	PORTLAND CEMENT CONCRETE DRIVEWAY PAVEMENT, 6 INCH	PORTLAND CEMENT CONCRETE SIDEWALK 4 INCH	PORTLAND CEMENT CONCRETE SIDEWALK 6 INCH	PORTLAND CEMENT CONCRETE SIDEWALK 8 INCH
		42300200	42400100	42400300	42400410
		SQ YD	SQ FT	SQ FT	SQ FT
OAK STREET					
208+15.23 - 208+65.23	24.80 - 45.45 RT		328		
208+49.14 - 209+00.20	8.99 - 42.45 RT	80		110	
208+89.44 - 210+39.83	18.46 - 29.84 RT		789		
210+27.92 - 210+62.39	8.77 - 23.44 RT	21		65	
210+52.99 - 211+17.32	18.68 - 23.48 RT		317		
211+07.24 - 211+43.59	9.13 - 23.63 RT	24		89	
211+34.22 - 213+18.51	17.10 - 23.63 RT		945		
213+17.23 - 213+47.79	8.42 - 22.10 RT	27		132	
213+44.90 - 218+19.77	13.01 - 22.32 RT		2375		
218+16.99 - 218+33.20	7.25 - 18.01 RT	8		54	
218+30.58 - 220+35.18	12.35 - 17.98 RT		1023		
220+30.64 - 220+66.65	8.39 - 17.27 RT			135	
220+62.14 - 223+07.30	12.27 - 29.28 RT		1165		
223+07.30 - 223+22.82	24.28 - 29.35 RT				200
223+22.82 - 225+17.28	24.35 - 30.05 RT		920		
225+12.31 - 225+44.20	9.19 - 30.06 RT	41		110	
225+39.18 - 226+18.52	25.06 - 30.03 RT		396		
226+13.34 - 226+47.34	9.62 - 30.03 RT	44		120	
226+42.56 - 228+01.75	25.01 - 25.26 RT		789		
STATE STREET					
300+25.22 - 300+80.42	21.86 - 40.02 RT		290		
300+80.42 - 300+97.07	21.86 - 31.17 RT	8		83	
300+96.93 - 301+78.20	21.66 - 25.89 RT		406		
301+78.17 - 302+12.42	20.88 - 28.71 RT	25		170	
302+12.07 - 303+58.45	20.71 - 26.60 RT		732		
303+58.52 - 303+78.81	21.61 - 29.88 RT	7		104	
303+79.28 - 304+13.99	21.89 - 27.16 RT		173		
304+06.02 - 304+11.79	14.21 - 29.99 LT		72		
TOTALS		285	10720	1172	200

UTILITIES			
STATION	OFFSET	FIRE HYDRANTS TO BE RELOCATED	VALVE VAULTS TO BE ADJUSTED
		56400400	60265700
		EACH	EACH
208+97.23	29.44 RT	1	
208+97.28	26.06 RT		1
209+04.87	26.02 RT		1
TOTALS		1	2

EROSION CONTROL		
STATION	OFFSET	INLET AND PIPE PROTECTION
		28000500
		EACH
208+56.89	18.59 RT	1
208+93.29	15.12 RT	1
213+53.72	13.00 RT	1
214+54.10	12.23 RT	1
215+53.56	20.99 RT	1
217+80.43	20.86 RT	1
219+47.30	22.09 RT	1
220+31.88	21.43 RT	1
220+66.94	21.15 RT	1
221+82.13	20.62 RT	1
222+21.40	19.84 RT	1
224+00.70	21.70 RT	1
224+34.49	16.21 RT	1
225+81.59	17.36 RT	1
226+46.01	17.45 RT	1
303+47.04	14.66 RT	1
303+87.41	16.17 RT	1
TOTAL		17

DETECTABLE WARNINGS		
STATION	OFFSET	DETECTABLE WARNINGS
		42400800
		SQ FT
STATE STREET		
304+06.80 - 304+11.67	17.14 - 19.43 LT	10
304+09.05 - 304+14.03	20.20 - 22.25 RT	10
TOTALS		20

MISCELLANEOUS		
STATION	OFFSET	PIPE HANDRAIL
		50901760
		FOOT
221+58.63 - 222+52.72	17.35 - 30.00 RT	100
TOTALS		100

COUNTY: EFFINGHAM | ILLINOIS
ROUTE NO. | SECTION: 22-00019 00-SW | FED. ROAD DIST. NO. 7 | FED. AID PROJECT:
FIELD BOOK: 818
DRAWN BY: JCS
CHECKED BY: MJH
FILE LOCATION: S:\2021\21274\DWG\TITLE SHEET.DWG
PLOT DATE: Tuesday, August 25, 2026 9:55:40 AM

MILANO & GRUNLOH ENGINEERS, LLC
114 W. WASHINGTON AVE. | PO BOX 897
EFFINGHAM, IL 62401
Phone: (217) 347-7262 | (800) 677-2714
Email: mgengineers@mgengineers.com
Web: www.mgengineers.com
Design Firm #184-003108


SCHEDULE OF QUANTITIES

SAFE ROUTES TO SCHOOL
22-00019-00-SW
TEUTOPOLIS, ILLINOIS

SHEET # 5 OF 10


JOB # 21274

CN 95979

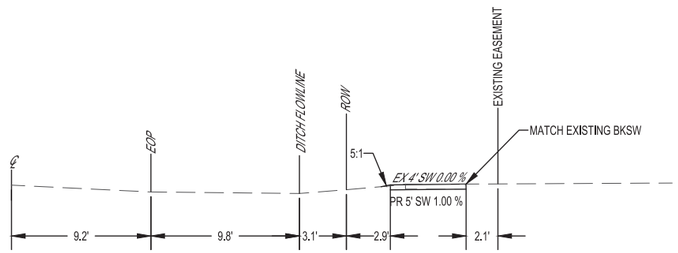


CUT: 1
FILL: 0

OAK STREET
VINE STREET TO ENTRANCE
Station 208+32 to Station 208+68

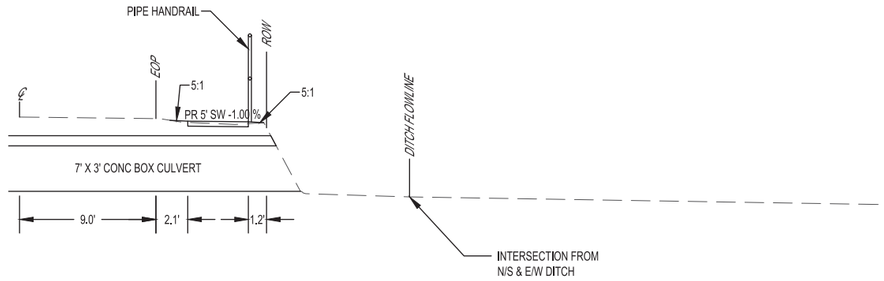


CUT: 0
FILL: 6

OAK STREET
DITCH CROSSING
Station 221+55 to Station 222+55

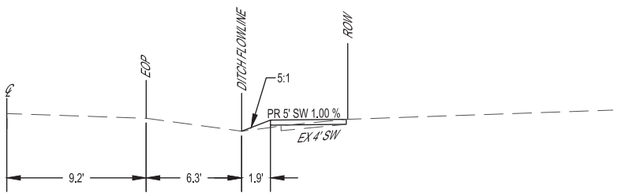


CUT: 0
FILL: 24

OAK STREET
ENTRANCE TO ENTRANCE
Station 208+68 to Station 213+20

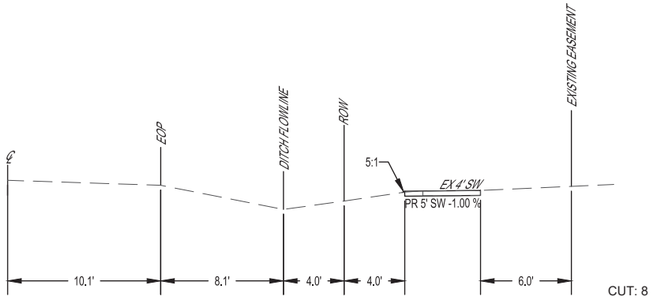


CUT: 8
FILL: 0

OAK STREET
DOEDTMAN SUBDIVISION TO INTERSECTION
Station 222+55 to Station 228+20

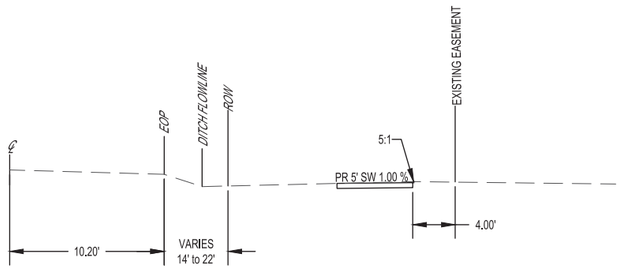

CUT: 55
FILL: 0

OAK STREET
ENTRANCE TO DOEDTMAN SUBDIVISION
Station 213+20 to Station 221+55

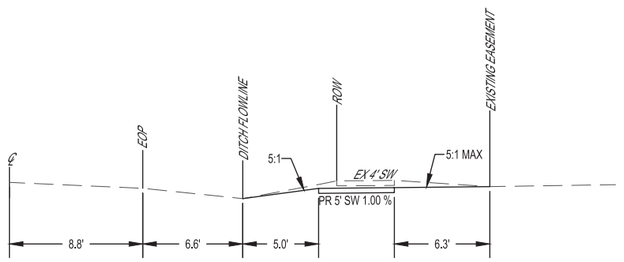

CUT: 65
FILL: 0

STATE STREET
INTERSECTION TO END
Station 300+51 to Station 304+20

NOTE: ALL SLOPES NOT LABELED SHALL MATCH EXISTING SLOPES

COUNTY	EFFINGHAM ILLINOIS
ROUTE NO.	SECTION 22-00019 00-SW
	FED. ROAD DIST. NO. 7
	FED. AID PROJECT:
FIELD BOOK	81B
DRAWN BY	JCS
CHECKED BY	MJH
FILE LOCATION	S:\2021\21274\DWG\TITLE SHEET.DWG
PLOT DATE	Tuesday, August 25, 2026 9:55:46 AM

MILANO & GRUNLOH ENGINEERS, LLC
114 W. WASHINGTON AVE. | PO BOX 897
EFFINGHAM, IL 62401
Phone: (217) 347-7262 | (800) 677-2714
Email: mgengineers@mgengineers.com
Web: www.mgengineers.com
Design Firm #184-003108

TYPICAL SHEET

SAFE ROUTES TO SCHOOL
22-00019-00-SW
TEUTOPOLIS, ILLINOIS

SHEET # 6 OF 10

JOB # 21274

CN 95979



POINT TABLE				
CONTROL	ELEVATION	NORTHING	EASTING	DESCRIPTION
CP 1	605.03	898324.8130	945992.8540	IRON PIN
CP 2	601.20	898063.3440	946226.8020	IRON PIN
CP 3	605.40	897739.3110	946226.0980	IRON PIN
CP 4	600.17	897207.7590	946261.1580	IRON PIN
CP 5	594.06	896283.5100	946260.9410	IRON PIN
CP 6	594.14	895510.6870	946252.4450	IRON PIN

BENCHMARKS		
BM #	ELEVATION	DESCRIPTION
BM 1	603.46	SET ON TOP CAP BOLT OF FIRE HYDRANT @ TIP OF OPEN ARROW
BM 2	595.66	SET ON TOP CAP BOLT OF FIRE HYDRANT OF EAST SIDE ARROW

ROUTE NO.
SECTION 22-00019 00-SW
COUNTY EFFINGHAM
ILLINOIS
FED. ROAD DIST. NO. 7
FED. AID PROJECT:

FIELD BOOK 818
DRAWN BY JCS
CHECKED BY MJH
FILE LOCATION S:\2021\21274\DWG\TITLE SHEET.DWG
PLOT DATE Tuesday, August 25, 2026 9:55:51 AM

MILANO & GRUNLOH ENGINEERS, LLC
114 W. WASHINGTON AVE. | PO BOX 897
EFFINGHAM, IL 62401
Phone: (217) 347-7262 | (800) 677-2714
Email: mgengineers@mgengineers.com
Web: www.mgengineers.com
Design Firm #184-003108


BENCHMARK AND ALIGNMENT SHEET


SAFE ROUTES TO SCHOOL
22-00019-00-SW
TEUTOPOLIS, ILLINOIS

SHEET # 7 OF 10

JOB # 21274

CN 95979

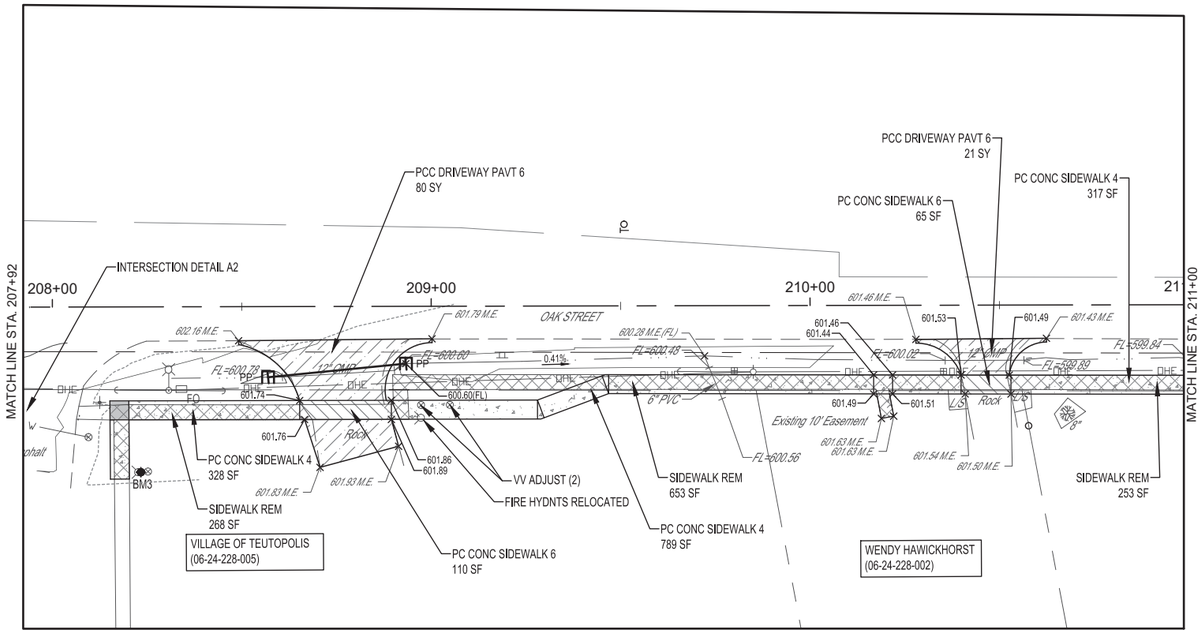

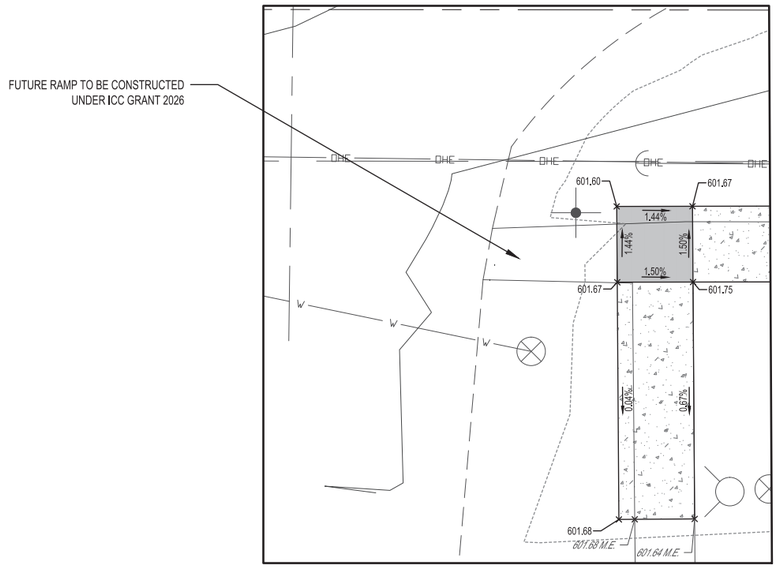

INTERSECTION DETAIL A2

SCALE 5:1

LEGEND

- WOOD POST
- POWER POLE
- SIGN
- FIRE HYDRANT
- WATER METER
- TELEPHONE PEDESTAL
- SANITARY MANHOLE
- GUY ANCHOR
- DETECTABLE WARNING
- PC CONC SIDEWALK 4
- PC CONC SIDEWALK 6
- PC CONC SIDEWALK 8
- PCC DRIVEWAY PAVEMENT 6"
- SIDEWALK REMOVAL
- LANDING/TURNING SPACE
- X.X% SIGNIFIES LONGITUDINAL SLOPE
- IP INLET PROTECTION
- PP PIPE PROTECTION

0 10 20

ROUTE NO. | SECTION | COUNTY
22-00019 00-SW EFFINGHAM ILLINOIS
FED. ROAD DIST. NO. 7
FED. AID PROJECT:

FIELD BOOK 818
DRAWN BY JCS
CHECKED BY MJH
FILE LOCATION S:\2021\21274\DWG\SIDEWALK.DWG
PLOT DATE Tuesday, August 25, 2026 9:55:58 AM

MILANO & GRUNLOH ENGINEERS, LLC
114 W. WASHINGTON AVE. | PO BOX 897
EFFINGHAM, IL 62401 | (800) 677-2714
Phone: (217) 347-7262
Email: mgengineers@mgengineers.com
Web: www.mgengineers.com
Design Firm #184-003108


SIDEWALK PLANS


SAFE ROUTES TO SCHOOL
22-00019-00-SW
TEUTOPOLIS, ILLINOIS

SHEET # 8 OF 10

JOB # 21274

CN 95979

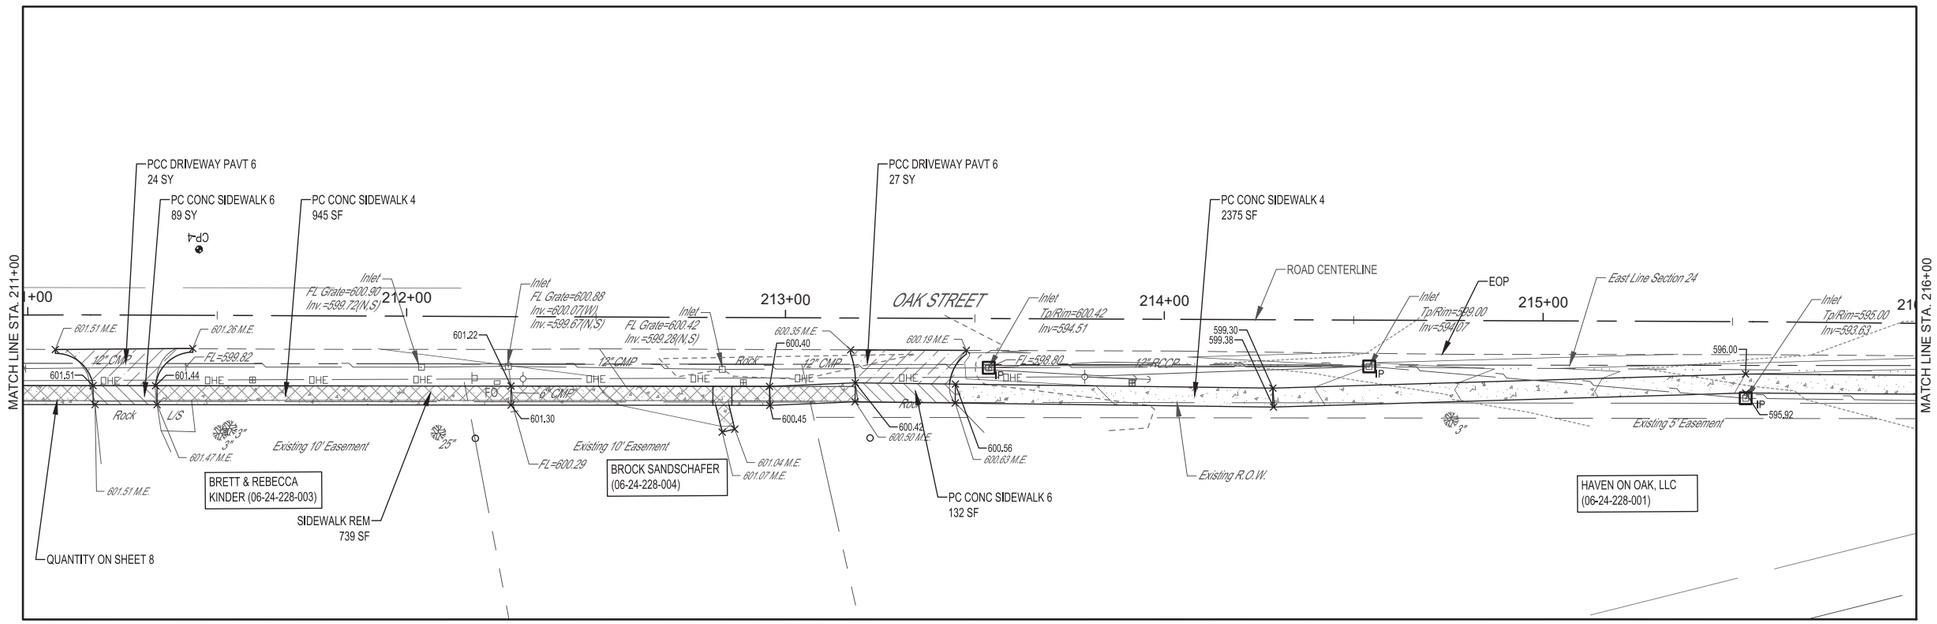

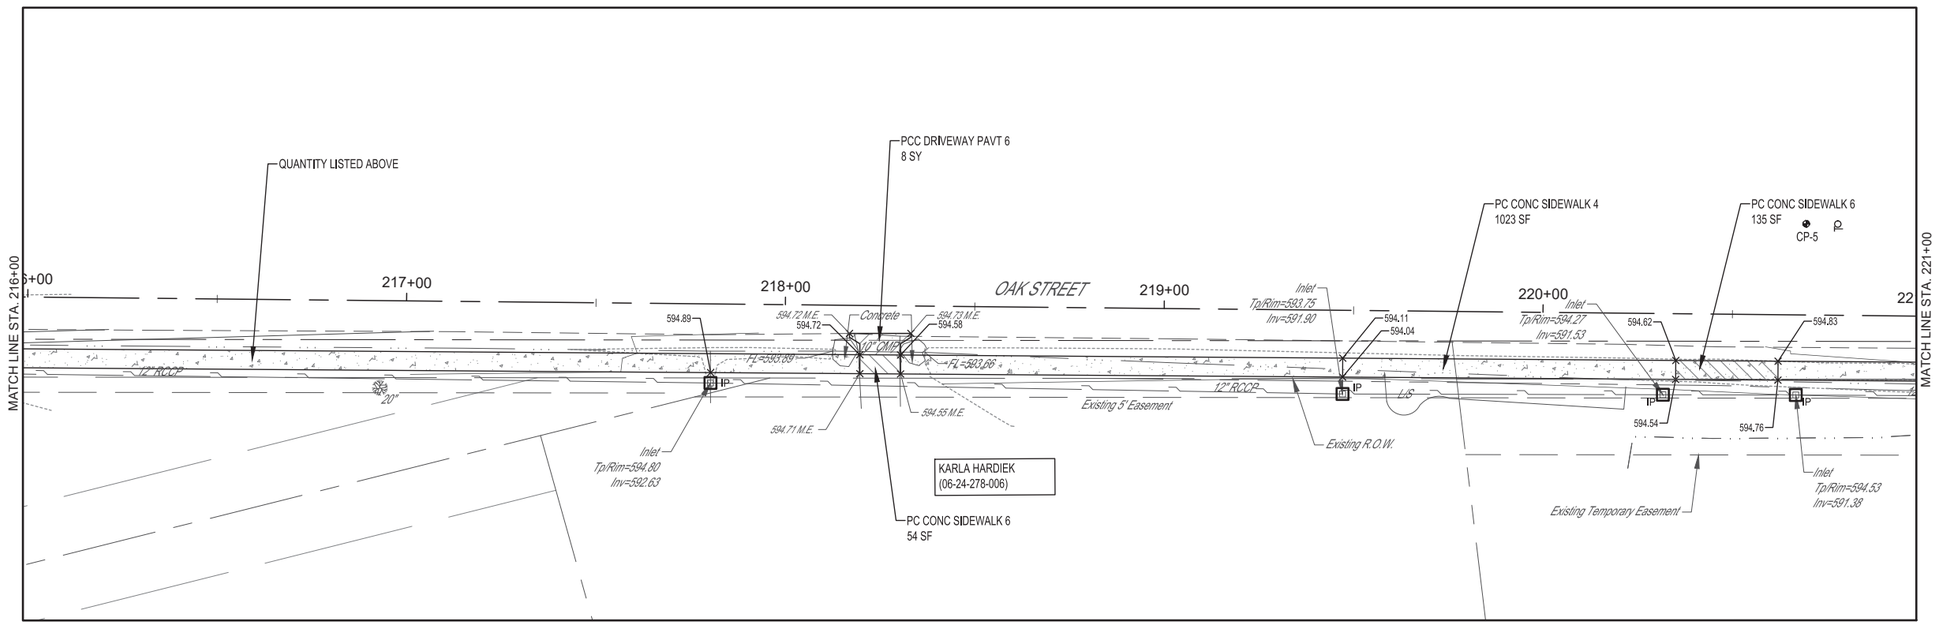

LEGEND

- WOOD POST
- POWER POLE
- SIGN
- FIRE HYDRANT
- WATER METER
- TELEPHONE PEDESTAL
- SANITARY MANHOLE
- GUY ANCHOR
- DETECTABLE WARNING
- PC CONC SIDEWALK 4
- PC CONC SIDEWALK 6
- PCC DRIVEWAY PAVEMENT 6"
- X.X% — SIGNIFIES LONGITUDINAL SLOPE
- IP — INLET PROTECTION
- PP — PIPE PROTECTION

COUNTY	EFFINGHAM ILLINOIS
ROUTE NO.	SECTION 22-00019 00-SW
	FED. ROAD DIST. NO. 7
	FED. AID PROJECT:
FIELD BOOK	818
DRAWN BY	JCS
CHECKED BY	MJH
FILE LOCATION	S:\2021\21274\DWG\SIDEWALK.DWG
PLOT DATE	Tuesday, August 25, 2026 9:56:01 AM

MILANO & GRUNLOH ENGINEERS, LLC
114 W. WASHINGTON AVE. | PO BOX 897
EFFINGHAM, IL 62401
Phone: (217) 347-7262 | (800) 677-2714
Email: mgengineers@mgengineers.com
Web: www.mgengineers.com
Design Firm #184-003108


SIDEWALK PLANS


SAFE ROUTES TO SCHOOL
22-00019-00-SW
TEUTOPOLIS, ILLINOIS

SHEET # 9 OF 10


JOB # 21274


CN 95979

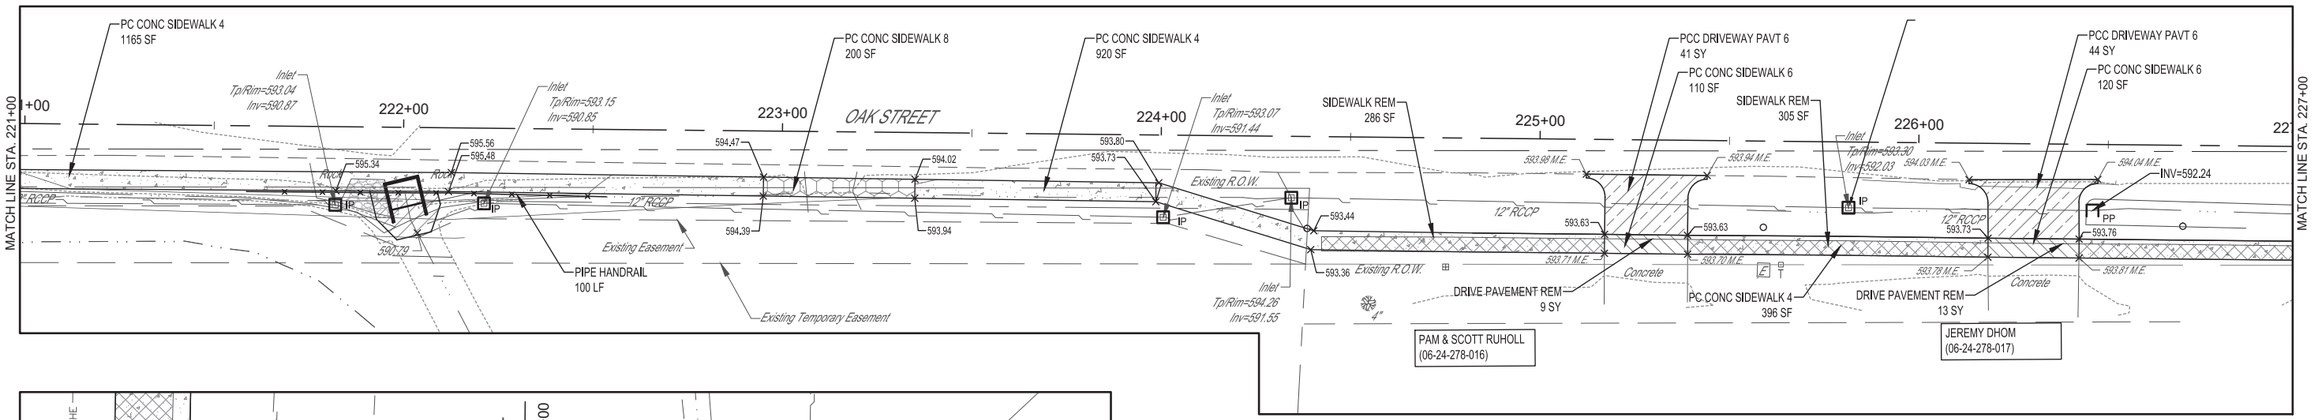

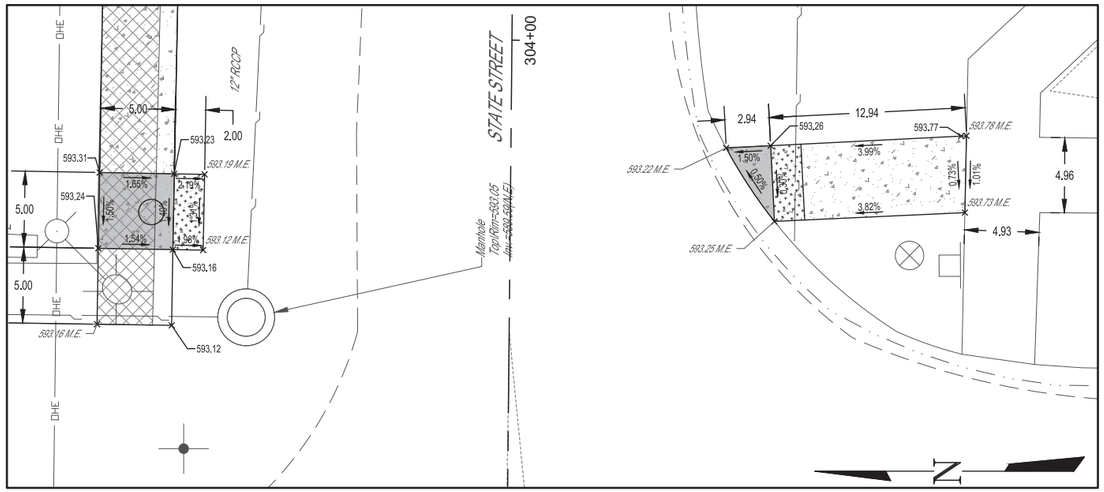

INTERSECTION DETAIL B
SCALE 5:1

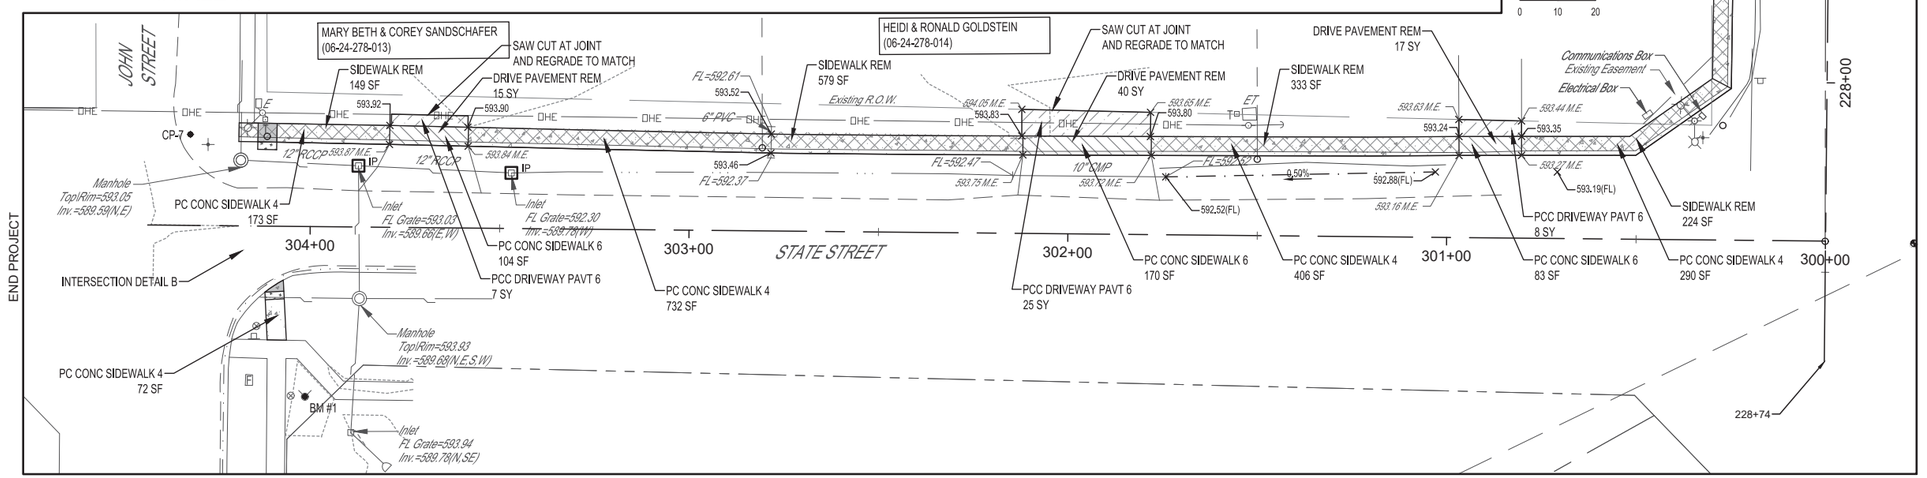

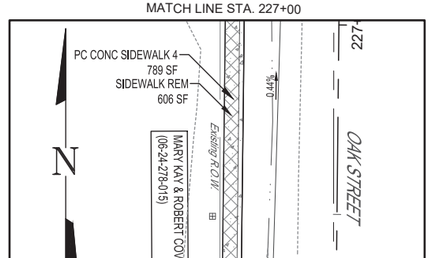

LEGEND

- WOOD POST
- POWER POLE
- SIGN
- FIRE HYDRANT
- WATER METER
- TELEPHONE PEDESTAL
- SANITARY MANHOLE
- GUY ANCHOR
- DETECTABLE WARNING
- PCC DRIVEWAY PAVEMENT 6"
- PC CONC SIDEWALK 8"
- PC CONC SIDEWALK 6"
- TURNING/LANDING SPACE
- X.X% — SIGNIFIES LONGITUDINAL SLOPE
- IP — INLET PROTECTION
- PP — PIPE PROTECTION

ROUTE NO.	SECTION	COUNTY
	22-00019-00-SW	EFFINGHAM
	FED. ROAD DIST. NO. 7	ILLINOIS
	FED. AID PROJECT:	

FIELD BOOK	618
DRAWN BY	JCS
CHECKED BY	MJH
FILE LOCATION	S:\2021\21274\DWG\SIDEWALK.DWG
PLOT DATE	Tuesday, August 25, 2026 9:56:06 AM

MILANO & GRUNLOH ENGINEERS, LLC
114 W. WASHINGTON AVE. | PO BOX 897
EFFINGHAM, IL 62401
Phone: (217) 347-7262 | (800) 677-2714
Email: mgengineers@mgengineers.com
Web: www.mgengineers.com
Design Firm #184-003108

SIDEWALK PLANS

SAFE ROUTES TO SCHOOL
22-00019-00-SW
TEUTOPOLIS, ILLINOIS

SHEET # 10 OF 10

JOB # 21274