

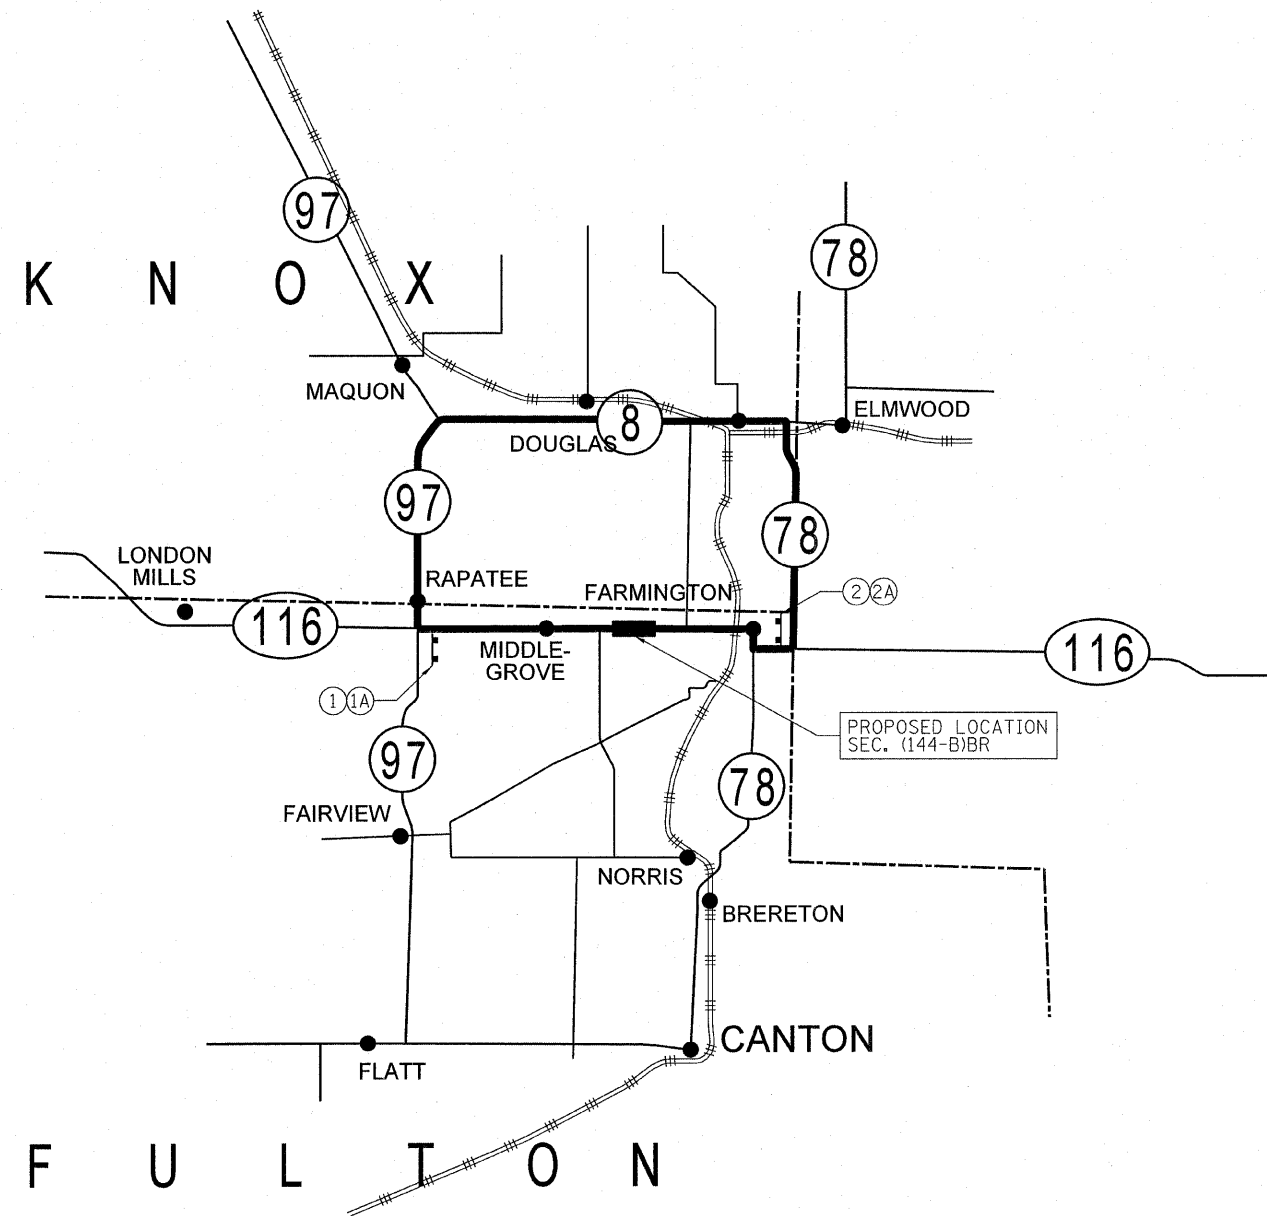




ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
F.A.P. 665	(144-B)BR	FULTON	67	16
FED. ROAD DIST. NO.		ILLINOIS CONTRACT NO. 68091		

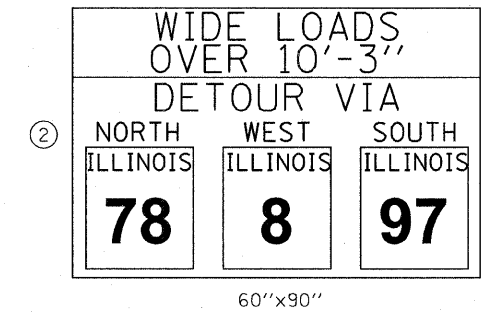

**STAGE I**

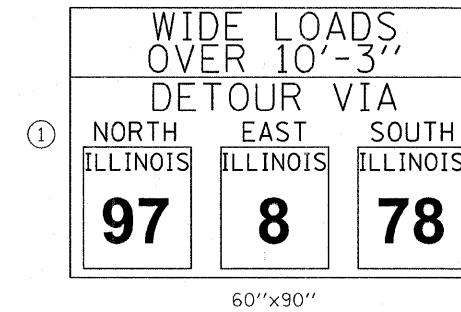

**STAGE II**

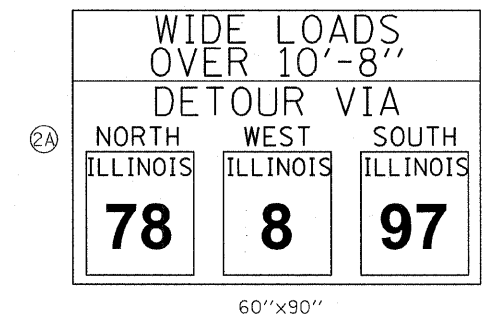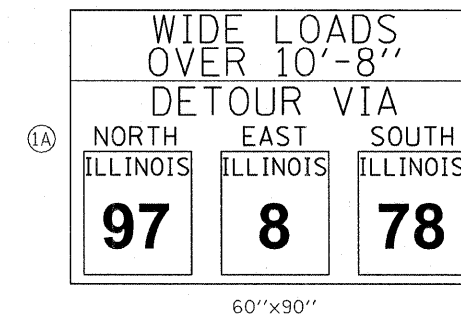

**DETOUR NOTES**

1. THE CONTRACTOR SHALL ERECT THE SIGN AT THE LOCATION DIRECTED BY THE RESIDENT ENGINEER. ALL SIGNS SHALL BE POST MOUNTED.
2. THE ABOVE NOTED WORK, INCLUDING SIGN POSTS HARDWARE AND LABOR SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE EACH. FOR TRAFFIC CONTROL AND PROTECTION STD. 701321 AND NO OTHER COMPENSATION SHALL BE ALLOWED.
3. THE RESIDENT ENGINEER SHALL GIVE I.D.O.T. BUREAU OF OPERATIONS PERMIT SECTION TWO WEEKS NOTICE BEFORE IMPLEMENTING ANY LANE WIDTH RESTRICTIONS.

**HAMPTON, LENZINI & RENWICK, INC.**  
 CIVIL & STRUCTURAL ENGINEERS  
 LAND SURVEYORS

3085 STEVENSON DRIVE, SUITE 201  
 SPRINGFIELD, ILLINOIS 62703  
 (217) 546-3400

ELGIN • SPRINGFIELD

PROJECT NUMBER: 12-37-0003-1    DATE: 07/31/08  
 DESIGNED: L.F.S.    CHECKED: S.W.M.    DRAWN: D.T.M.

**WIDE LOAD DETOUR**  
**F.A.P. ROUTE 665 (IL 116) OVER LITTLERS CREEK**  
**SECTION (144-B) BR**  
**FULTON COUNTY**