SIGN DETAIL

1:75

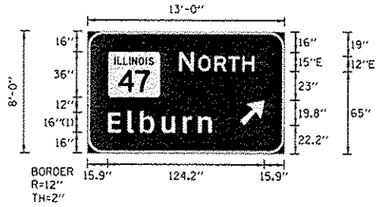

FONT:
(1) ClearviewHwy-5-W

Panel Style: guide_fwy_intermediate.ssl
M.U.T.C.D.: 2009 Edition

Panel Style:guide_fwy_intermediate.ssl
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

SIGN NUMBER	EB-TR-07
WIDTH x HGHT.	13'-0" x 8'-0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: ZZ Sheeting
	COLOR: Green
LEGEND/BORDER	TYPE: ZZ Sheeting
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
MI-1100A-2-4202000		15.9	44	41.1	36
AR_Type A	315	120.3	22.2	15.9	25.1

LETTER POSITIONS (X)

																								LENGTH	SERIES/SIZE
N	O	R	T	H																					E 2000
72.1	87.4	100.2	111.3	122.3																				59.9	15,12
E	i	b	u	r	n																				ClearviewHwy-5-W
15.9	31.4	41.3	58.3	75.3	87.3																			82.5	16/13

SIGN DETAIL

1:75

FONT:
(1) Cleandeswhwy-5-W

Panel Style: guide_fwy_intermediate.ssl
M.U.T.C.D.: 2009 Edition

Panel Style:guide_fwy_intermediate.ssl
Dimensions are inches.tenths

Letter locations are panel edge to lower left corner

SIGN NUMBER	SB-BR-09
WIDTH x HGHT.	19'-0" x 10'-0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: ZZ Sheeting
	COLOR: Green
LEGEND/BORDER	TYPE: ZZ Sheeting
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
MI_1	0	59.5	70	36	36
MI-1100A-2-4202000		111.5	70	41.1	36

LETTER POSITIONS (X)

																								LENGTH	SERIES/SIZE
E	A	S	T																						E 2000
167.7	180.5	194	205.1																					46.4	15,12
T	O																								E 2000
18	31.4																							26	15
C	h	i	c	a	g	o																			ClearviewHwy-5-W
59.5	77.4	94.2	103.1	117.6	134	151.1																		103.9	16/13
N	E	X	T		L	E	F	T																	EM 2000
46.5	63.9	78	93.7	105.5	121.5	135.9	151.1	164.7																130.1	16

3:57:44 PM
8/1/2013

GRAEF 8501 W. Higgins Road Suite 280 Chicago, Illinois 60631 (773) 399-0112

USER NAME = 1405	DESIGNED - EF	REVISED -	
	DRAWN - EF	REVISED -	
PLOT SCALE = 10.0000 ' / in.	CHECKED - RS	REVISED -	
PLOT DATE = 8/1/2013	DATE - 08/01/2013	REVISED -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

OVERHEAD SIGN STRUCTURE REPAIR & REPLACEMENT
SIGN PANEL PLAN - LOCATION 5 & 6 PROPOSED

SCALE: N.T.S. | SHEET 5 OF 9 SHEETS | STA. | TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	D1 OVD SIN STR REPL14-30	VARIOUS	53	42
		CONTRACT NO. 46291		
	ILLINOIS FED. AID PROJECT			