SUGGESTED STAGES OF CONSTRUCTION AND TRAFFIC CONTROL SCHEDULE

LOCATION	SHEET	SUBBASE GRANULAR MATERIAL, TYPE B, 4"	BITUMINOUS MATERIALS (PRIME COAT)	AGGREGATE (PRIME COAT)	PROTECTIVE COAT	PAVEMENT REMOVAL	SHORT TERM PAVEMENT MARKING	WORK ZONE PAVEMENT MARKING REMOVAL	TEMPORARY CONCRETE BARRIER	RELOCATE TEMPORARY CONCRETE BARRIER	IMPACT ATTENUATORS, TEMPORARY (FULLY REDIRECTIVE, NARROW), TEST LEVEL 3	IMPACT ATTENUATORS, TEMPORARY (SEVERE USE, WIDE), TEST LEVEL 3	IMPACT ATTENUATORS, RELOCATE (FULLYREDIRECTIVE, NARROW), TEST LEVEL 3	IMPACT ATTENUATORS, RELOCATE (SEVERE USE), TEST LEVEL 3	PAVEMENT MARKING REMOVAL	TEMPORARY CONCRETE BARRIER (SPECIAL)	TEMPORARY PAVEMENT	TEMPORARY EPOXY PAVEMENT MARKING - LETTERS AND SYMBOLS	TEMPORARY EPOXY PAVEMENT MARKING - LINE 4"	TEMPORARY EPOXY PAVEMENT MARKING - LINE 5"	TEMPORARY EPOXY PAVEMENT MARKING - LINE 6"	TEMPORARY EPOXY PAVEMENT MARKING - LINE 8"	TEMPORARY EPOXY PAVEMENT MARKING - LINE 12"	TEMPORARY EPOXY PAVEMENT MARKING - LINE 24"	TEMPORARY INFORMATION SIGNING
		SQ YD	TON	TON	SQ YD	SQ YD	FOOT	SQ FT	FOOT	FOOT	EACH	EACH	EACH	EACH	SQ FT	FOOT	SQ YD	SQ FT	FOOT	FOOT	FOOT	FOOT	FOOT	FOOT	SQ FT
LOCAL ROADS - STAGES 1A-1B	1	138	0.1	0.3	138	-	12,230	-	975.0	-	1	-	-	-	542	-	138	-	6,115	-	74	-	-	72	-
	2	-	-	-	-	-	302	-	-	-	-	-	-	-	-	-	-	-	151	-	-	-	-	-	-
LOCAL ROADS - STAGES 2A-2B	1	-	-	-	-	66	11,732	2,220	600.0	975.0	-	-	-	-	-	737.5	-	39	5,866	-	743	-	75	59	-
	2	-	-	-	-	-	700	51	-	-	-	-	-	-	-	-	-	-	350	-	-	-	-	-	-
LOCAL ROADS - STAGES 3A	1	-	-	-	-	72	7,936	2,445	-	637.5	-	-	1	-	-	-	-	156	3,968	-	690	-	-	114	-
	2	-	-	-	-	-	302	117	-	-	-	-	-	-	-	-	-	-	151	-	18	-	-	-	-
LOCAL ROADS - STAGES 3B	1	-	-	-	-	-	160	184	-	-	-	-	-	-	-	-	-	39	80	-	132	-	-	36	-
	2	-	-	-	-	-	302	9	-	-	-	-	-	-	-	-	-	-	151	-	-	-	-	-	-
LOCAL ROADS - STAGES 3C	1	-	-	-	-	-	1,254	221	-	-	-	-	-	-	-	-	-	-	627	-	125	-	-	30	-
	2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
SUBTOTAL		138	0.1	0.3	138	138	34,918	5,247	1,575.0	1,612.5	1	0	1	0	542	737.5	138	234	17,459	0	1,782	0	75	311	0
FIELD CONDITION (NOTE 1)		21	0.0	0.0	21			3,297	850	875			3	3	1,001		21	35	6,963	598	267	2,274	383	47	
TOTAL		159	0.1	0.3	159	138	92,838	25,279	6,487.5	6,725.0	13	1	10	6	7,674	737.5	159	269	53,382	4,582	2,049	17,432	2,938	358	38

NOTE:

1. THE FIELD CONDITION INCLUDES ADDITIONAL QUANTITIES FOR THE DETOUR ROUTE IMPROVEMENTS AND THE REQUIRED FIELD ADJUSTMENTS.

A

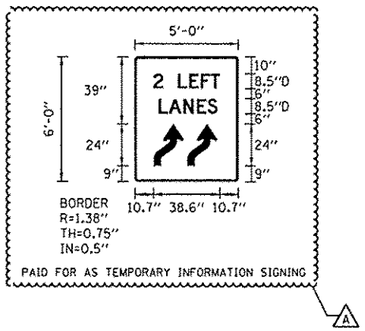

A

SIGN NUMBER	Lane Shift
WIDTH x HGHT.	5'-0" x 6'-0"
BORDER WIDTH	0.75"
CORNER RADIUS	1.38"
MOUNTING	Ground
BACKGROUND	TYPE: Reflective
	COLOR: Orange A
LEGEND/BORDER	TYPE: Reflective
	COLOR: Black/Black

SYMBOL	ROT	X	Y	WID	HT
W1_4RA	0	10.9	9	17.3	24.1
W1_4RA	0	30.4	9	17.3	24.1

A

LETTER POSITIONS (X)																LENGTH	SERIES/SIZE
2		L	E	F	T												D 2000
10.7	16.5	25	31.6	38.3	44.1											38.6	8.5
L	A	N	E	S													D 2000
13.9	19.7	28.2	36	42.1												34	8.5



A

SIGN NUMBER	2 Left Lanes A
WIDTH x HGHT.	4'-0" x 2'-0"
BORDER WIDTH	0.75"
CORNER RADIUS	1.38"
MOUNTING	Ground
BACKGROUND	TYPE: Reflective
	COLOR: Orange
LEGEND/BORDER	TYPE: Reflective
	COLOR: Black/Black

SYMBOL	ROT	X	Y	WID	HT

LETTER POSITIONS (X)																LENGTH	SERIES/SIZE
2		L	E	F	T												D 2000
10.4	14.5	20.5	25.1	29.8	33.9											27.2	6
L	A	N	E	S													D 2000
12.5	16.6	22.6	28.1	32.4												24	6

AECOM
303 EAST WACKER DRIVE, SUITE 1400
CHICAGO, IL 60601-5276
PHONE: (312) 373-7700 FAX: (312) 373-6800

0160W26-sht-Staging-Schedule-02	DESIGNED - OPS	REVISED - A 10/15/2013
USER NAME = pimsarno	DRAWN - OPS	REVISED -
PLOT SCALE = 50.0000 ' / in.	CHECKED - OBM	REVISED -
PLOT DATE = 10/15/2013	DATE - 9/15/13	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUGGESTED STAGES OF CONSTRUCTION AND TRAFFIC CONTROL PLAN SCHEDULES

SCALE: | SHEET 2 OF 2 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
90/94/290	2013-008R	COOK	559	64A

CONTRACT NO. 60W26

ILLINOIS FED. AID PROJECT

FILE PATH = pw:\\38839-pwint1.aecomonline.local:PWAECOM38\Documents\01 Americas\Transportation\60259939 Circle\Phase II\002_CAD\026_Roadway\Sheets\60W26_Contract\0160W26-sht-Staging-Schedule-02