

NOTES

SEE STANDARD 602701 FOR DETAILS OF STEPS.

EXCEPT AS NOTED HEREON INLET SPECIAL SHALL BE CONSTRUCTED IN ACCORDANCE WITH SECTION 602 OF THE STANDARD SPECIFICATIONS.

THE SIDE WALLS MAY BE BUILT AS PRECAST SEGMENTED SECTIONS.

ALL VOIDS AROUND PIPE ENTRANCE, BOTH INSIDE AND OUTSIDE, SHALL BE SEALED WITH MORTAR.


WEIGHT OF CAST IRON FRAME & GRATE = 240 kg (530 lbs.) \pm . STEPS SHALL BE OMITTED WHEN DEPTH OF "H" IS LESS THAN 1.5 m (5 ft) .

DETAIL OF FRAME & GRATE


NOTES


CLASS SI CONCRETE OR PRECAST CONCRETE SHALL BE USED THROUGHOUT. PRECAST CONCRETE SHALL BE IN ACCORDANCE WITH SECTION 504.01 THRU 504.05 OF THE STANDARD SPECIFICATIONS EXCEPT THAT CONCRETE STRENGTH SHALL BE 27.5 MPa (4,000 psi) AFTER 28 DAYS.

THE CONTRACT UNIT PRICE EACH FOR INLET SPECIAL SHALL INCLUDE THE COST OF CONSTRUCTING THE INLET BOX, FURNISHING AND INSTALLING THE FRAME AND GRATE, THE CAST IRON STEPS (IF USED), THE PRECAST FLOOR SLABS, SAND CUSHION (WHEN USED) AND REINFORCEMENT BARS.



* THIS GRATE TO BE USED WITHOUT CURB BOX WHEN INLET IS IN DRIVEWAY.

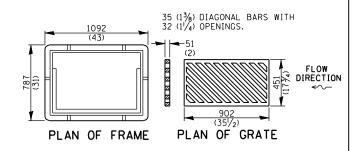





ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS

INLET SPECIAL

OTHERWISE NOTED.

STANDARD INLET FOR **CURB & GUTTER TYPE B-6.24**

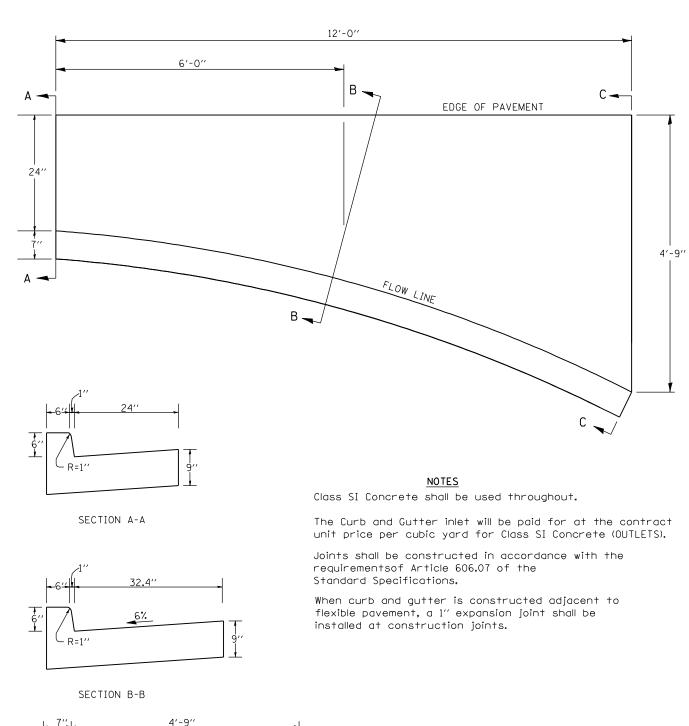



SECTION C-C

- QUANTITY -Section A-A to C-C (1.23 Cu. Yds.) Class SI Concrete

REVISED - 10-10-06		F.A.P RTE.		COUNTY	TOTAL SHEETS	SHEET
REVISED -	REGION 2 / DISTRICT 2 STANDARD	595		ROCK ISLAND		373
REVISED -				CONTRACT		
REVISED -	SCALE: 40.0000 // IN SHEET NO. OF SHEETS STA. TO ST	TA. FED.	ROAD DIST. NO. ILLINOIS FED. A	ID PROJECT		