


## **TEMPORARY INFORMATION SIGN**

## NOTES:

- 1. USE BLACK LETTERING ON ORANGE BACKGROUND.
- 2. ERECT SIGNS 500 FT. IN ADVANCE OF THE LOCATION FOR THE "ROAD CONSTRUCTION AHEAD" SIGN AT LOCATIONS AS DIRECTED BY THE ENGINEER.
- 3. ERECT SIGN () WITH INSTALLED PANEL (2) A MINIMUM OF ONE WEEK PRIOR TO THE START OF CONSTRUCTION,
- 4. REMOVE PANEL 2 ON THAT DATE.
- 5. SEE SPECIAL PROVISION "TEMPORARY INFORMATION SIGN" FOR ADDITIONAL INFORMATION.

6.SHALL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQUARE FOOT FOR TEMPORARY INFORMATION SIGN. INSTALLED SIGN PANEL 2 SHALL NOT BE MEASURED SEPERATELY BUT SHALL BE CONSIDERED INCLUDED IN THE SQUARE FOOTAGE OF SIGN 1.

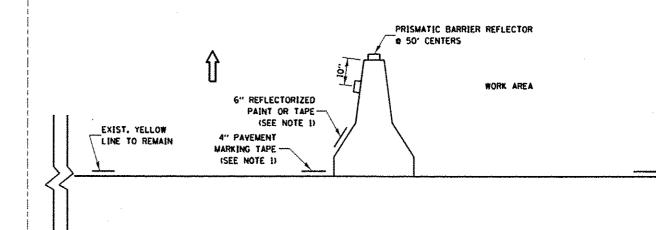

## NOTES:

- THE CONTRACTOR HAS THE OPTION OF USING EITHER THE LINE ON THE TEMPORARY CONCRETE BARRIER OR ON THE PAVEMENT.
- 2. THE COLOR OF THE REFLECTORS AND PAVEMENT/BARRIER MARKING LINE WILL VARY WITH STAGING AND SHALL MATCH THE EXISTING LINE IN THE WORK AREA.
- THE COST OF THE REFLECTORS IS INCLUDED IN THE COST OF THE TEMPORARY CONCRETE BARRIER.

## TRAFFIC CONTROL DETAIL FOR TEMPORARY CONCRETE BARRIER

Rev. COUNTY SHEETS NO. KANKAKEE 183 167 USER NAME . SUSERS DESIGNED -REVISED -SECTION SFILELS STATE OF ILLINOIS DRAWN REVISED DETAILS 57 (140)BR, BR-1 & ((1) PLOT SCALE \* \*SCALE\* CHECKED REVISED -**DEPARTMENT OF TRANSPORTATION** CONTRACT NO. 66750 #NODEL NAME # PLOT CATE . SOATES SHEET \_\_\_ OF \_\_\_ SHEETS STA. DATE SCALE TO STA.

€ ROWY.