


TEMPORARY INFORMATION SIGN

NOTES:


1. USE BLACK LETTERING ON ORANGE BACKGROUND.
2. ERECT SIGNS 500 FT. IN ADVANCE OF THE LOCATION FOR THE "ROAD CONSTRUCTION AHEAD" SIGN AT LOCATIONS AS DIRECTED BY THE ENGINEER.
3. ERECT SIGN ① WITH INSTALLED PANEL ② A MINIMUM OF ONE WEEK PRIOR TO THE START OF DETOUR.
4. REMOVE PANEL ② ON THAT DATE.
5. SEE SPECIAL PROVISION "TEMPORARY INFORMATION SIGN" FOR ADDITIONAL INFORMATION.
6. SHALL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQUARE FOOT FOR TEMPORARY INFORMATION SIGN. INSTALLED SIGN PANEL 2 SHALL NOT BE MEASURED SEPERATELY BUT SHALL BE CONSIDERED INCLUDED IN THE SQUARE FOOTAGE OF SIGN 1.

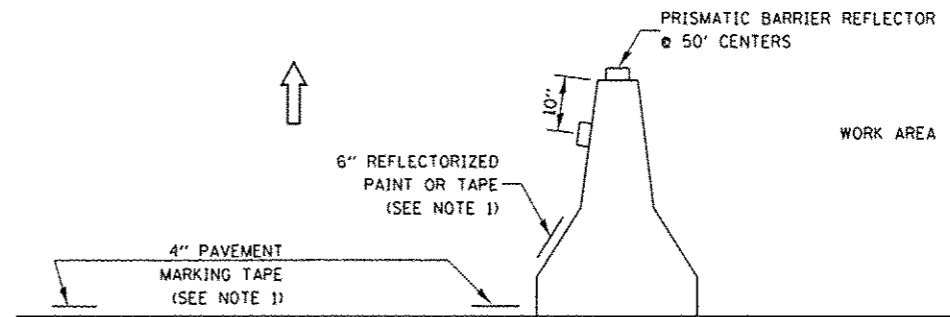

NOTES:

1. THE CONTRACTOR HAS THE OPTION OF USING EITHER THE LINE ON THE TEMPORARY CONCRETE BARRIER OR ON THE PAVEMENT.
2. MAY HAVE TO SLIGHTLY MOVE BARRIER DURING PAVING OPERATIONS. COST INCLUDED IN TEMPORARY CONCRETE BARRIER
3. THE COST OF THE REFLECTORS AND THE PAVEMENT MARKING LINES ARE INCLUDED IN THE COST OF THE TEMPORARY CONCRETE BARRIER.

TRAFFIC CONTROL DETAIL FOR TEMPORARY CONCRETE BARRIER

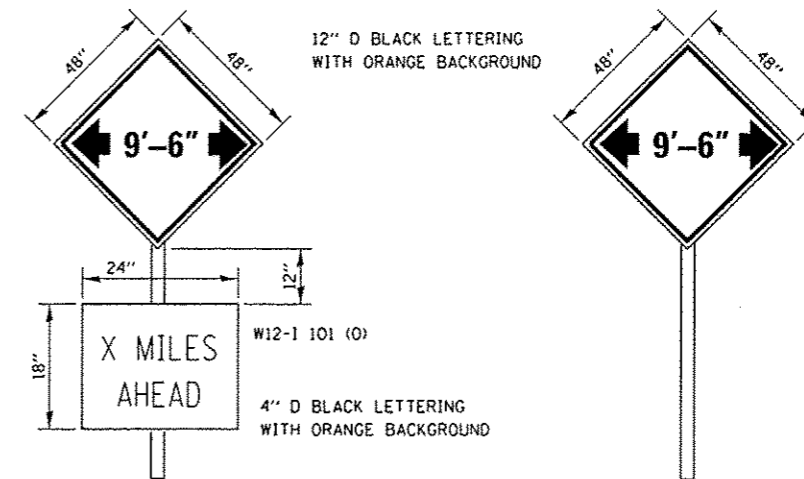

TO BE POST MOUNTED. TWO SIGNS REQUIRED, ONE IN THE WBL JUST SOUTH OF THE US 52 INTERSECTION, THE OTHER SIGN 1/2 MILE NORTH OF I-80 IN THE EBL

THE ENGINEER WILL NOTIFY DISTRICT 3 BUREAU OF OPERATIONS 14 CALENDAR DAYS PRIOR TO INSTALLING ANY TRAFFIC CONTROL DEVICES THAT WILL RESTRICT THE PAVEMENT WIDTH.

THE CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING WITH THE ENGINEER TO MEET THIS REQUIREMENT.

COST OF SUPPLYING, INSTALLING, MAINTAINING AND REMOVING WIDTH RESTRICTION SIGNS SHALL BE INCLUDED IN THE COST OF THE TRAFFIC CONTROL AND PROTECTION PAY ITEMS.

WIDTH RESTRICTION SIGNING DETAILS

FILE NAME : c:\pwork\pvidot\pletschr\0249716\030	USER NAME : pletschr	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	DETAILS	F.A.P. RTE. 311	SECTION (4)BR-1	COUNTY LASALLE	TOTAL SHEETS 38	SHEET NO. 35		
#MODELNAME#	PLOT SCALE : 1/80,0000 ' / in.	CHECKED -	REVISED -			SCALE:	SHEET OF SHEETS	STA. TO STA.	ILLINOIS FED. AID PROJECT			
	PLOT DATE : 8/2/2013	DATE -	REVISED -						CONTRACT NO. 66B13			

Rev.