


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	D7 CULVERT LINING 2025-1	VARIOUS	3	1
		ILLINOIS	CONTRACT NO. 74D24	

D-97-063-24

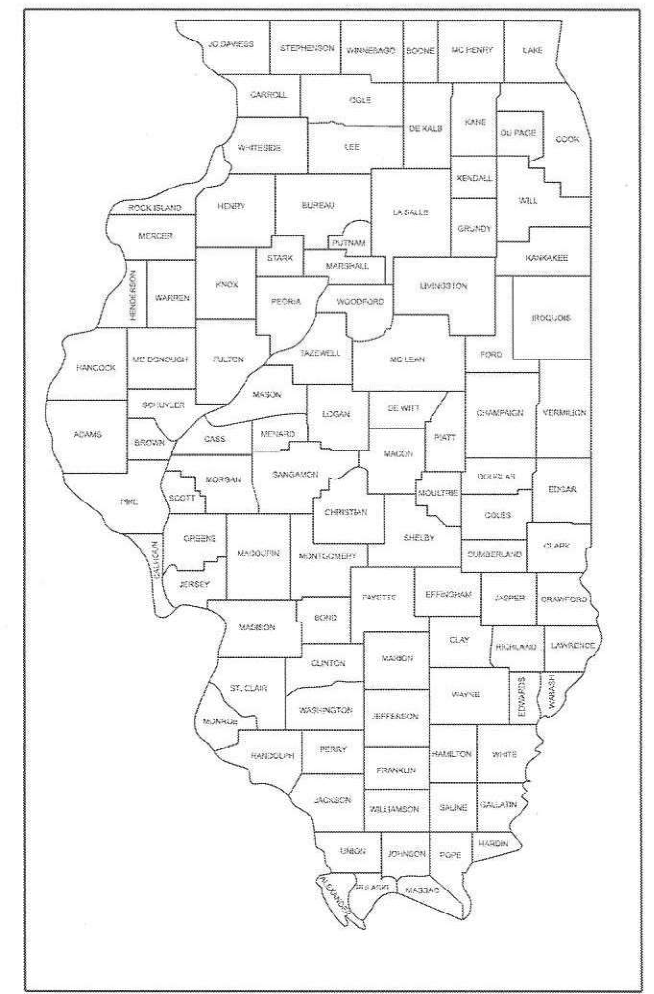

**PROPOSED
HIGHWAY PLANS**

**FAI ROUTE 57 (I 57)
SECTION D7 CULVERT LINING 2025-1**

**CULVERT LINING
VARIOUS COUNTIES**

FOR INDEX OF SHEETS, SEE SHEET NO. 2

C-97-098-24

015-0063
SB I-57:MP 201.5

015-0033
NB & SB I-57:MP 198

015-0048
SB I-57:MP 193.2



087-0010
SB I-57:MP 169.3

015-0032
NB I-57:MP 188.6

025-0073
NB I-57:MP 148

SN 013-0027
SB I-57:MP 143

025-0043
NB I-57:MP 147

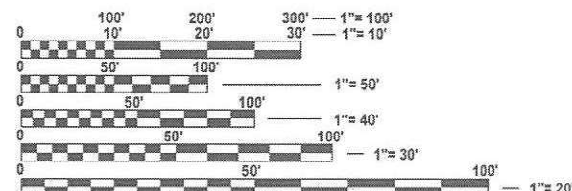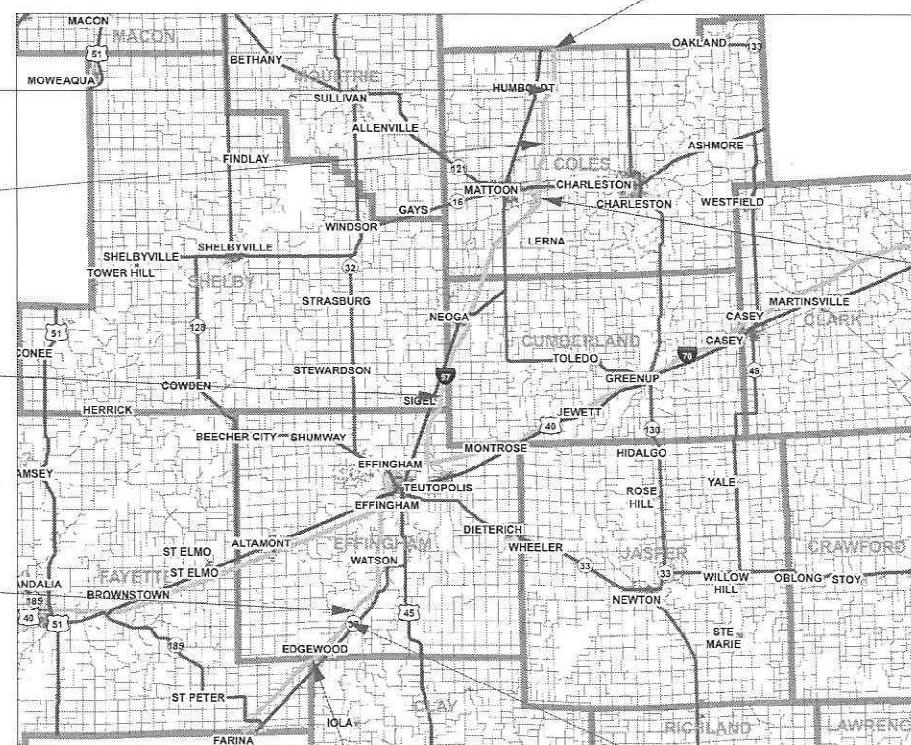

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

PROJECT ENGINEER: BRIAN BIERMAN
PROJECT MANAGER: JACQUELYN SEALS

CONTRACT NO. 74D24

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED August 2 2024
Jeffrey P. Myrland
REGIONAL ENGINEER

October 4, 2024
Scott A. Etkin
ENGINEER OF DESIGN AND ENVIRONMENT

October 4, 2024
James J. Guerin
DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

GENERAL NOTES

LINE EXISTING CORRUGATED METAL PIPES UNDER SLOPE WALLS OF EIGHT OVERHEAD BRIDGES ALONG I-57 WITH POLYETHYLENE SOLID WALL SMOOTH INTERIOR PIPE AT VARIOUS LOCATIONS IN CLAY, EFFINGHAM, SHELBY AND COLES COUNTIES.

CLEANING SEDIMENT FROM EXISTING CULVERT WILL BE REQUIRED AT SOME LOCATIONS. THIS CLEANING OF SEDIMENT WILL NOT BE PAID SEPARATE BUT WILL BE INCLUDED IN THE COST OF "INSERTION CULVERT LINER" OF SPECIFIED DIAMETER.

ALL AREAS DISTURBED WILL BE RESHAPED AND SEEDED AS NECESSARY.

INDEX OF SHEETS

SHEET NO.	ITEM
1	COVER SHEET
2	GENERAL NOTES, INDEX OF SHEETS, LIST OF STANDARDS AND CULVERT LINING SCHEDULE
3	SUMMARY OF QUANTITIES

THE FOLLOWING STANDARDS ARE A PART OF THESE PLANS AND ARE INCLUDED FOLLOWING THE LAST NUMBERED SHEET OF THE PLANS.

STANDARD NO.	DESCRIPTION
000001-08	STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
001006	DECIMAL OF AN INCH AND OF A FOOT
701101-05	OFF-RD OPERATIONS, MULTILANE, 15' TO 24" FROM PAVEMENT
701106-02	OFF-RD OPERATIONS, MULTILANE, MORE THAN 15' (4.5 m) AWAY
701400-12	APPROACH TO LANE CLOSURE, FREEWAY/EXPRESSWAY
701406-13	LANE CLOSURE, FREEWAY/EXPRESSWAY, DAY OPERATIONS ONLY
701901-09	TRAFFIC CONTROL DEVICES

CULVERT LINER SCHEDULE		COUNTY	I-57	MILEPOST	INSERTION CULVERT LINE 36"	INSERTION CULVERT LINE 42"	INSERTION CULVERT LINE 48"
STRUCTURE NUMBER	FACILITY CARRIED				NB/SB	FOOT	FOOT
013-0027	1ST AVENUE	CLAY	SB	143	150	-	-
025-0043	300TH AVENUE	EFFINGHAM	NB	147	-	-	195
025-0073	950TH STREET	EFFINGHAM	NB	148	-	145	-
087-0010	100 NORTH	SHELBY	SB	169.3	115	-	-
015-0032	650 NORTH	COLES	NB	188.6	125	-	-
015-0048	1100 NORTH	COLES	SB	193.2	100	-	-
015-0033	1650 NORTH	COLES	NB	198	125	-	-
015-0033	1650 NORTH	COLES	SB	198	140	-	-
015-0063	1900 NORTH	COLES	SB	201.5	90	-	-
TOTALS:					845	145	195

MODEL: Untitled (Sheet)
FILE NAME: c:\p\work\pwrto\hille\ad1010995\D774D24-shr-index.dgn

USER NAME = Brian.Bierman	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	GENERAL NOTES, INDEX OF SHEETS, HIGHWAY STANDARDS AND CULVERT LINING SCHEDULE	F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
	DRAWN -	REVISED -			57	D7 CULVERT LINING 2025-1	VARIOUS	3	2	
	CHECKED -	REVISED -			CONTRACT NO. 74D24					
PLOT DATE = 8/2/2024	DATE -	REVISED -			SCALE:	SHEET	OF	SHEETS	STA.	TO STA.
				ILLINOIS FED. AID PROJECT						

MODEL: Untitled (Sheet)
 FILE NAME: c:\p\work\pwrto\hille\ad1010995\D74D24-shs-cc.dgn

CODE NO.	ITEM	UNIT	TOTAL QUANTITY	CONSTR. CODE
				100% STATE
				PIPE CULVERT 0004
54390230	INSERTION CULVERT LINER 36"	FOOT	845	845
54390250	INSERTION CULVERT LINER 42"	FOOT	145	145
54390260	INSERTION CULVERT LINER 48"	FOOT	195	195
67100100	MOBILIZATION	L SUM	1	1
70100700	TRAFFIC CONTROL AND PROTECTION, STANDARD 701406	L SUM	1	1

REV - MS

USER NAME = Brian.Bierman	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SUMMARY OF QUANTITIES				F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	DRAWN -	REVISED -						57	D7 CULVERT LINING 2025-1	VARIOUS	3	3
	CHECKED -	REVISED -						CONTRACT NO. 74D24				
PLOT DATE = 7/31/2024	DATE -	REVISED -		SCALE:	SHEET	OF	SHEETS	STA.	TO STA.	ILLINOIS	FED. AID PROJECT	