

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
70	D7 CULVERT LINING 2025-3	CLARK	3	1
		ILLINOIS	CONTRACT NO. 74D26	

FOR INDEX OF SHEETS, SEE SHEET NO. 2

PROPOSED  
HIGHWAY PLANS

FAI ROUTE 70 (I 70)  
D7 CULVERT LINING 2025-3  
CULVERT LINING INSTALLATION  
CLARK COUNTY

C-97-100-24

D-97-065-24





SN 012-0041  
EB & WB I-70:MP 146

012-0028  
EB & WB I-70:MP 145

012-0003  
EB & WB I-70:MP 147.6

012-0045  
EB & WB I-70:MP 149

SN 012-0046  
EB & WB I-70:MP 152.8

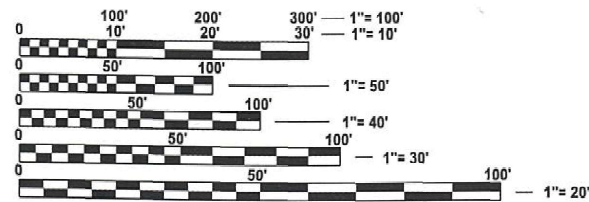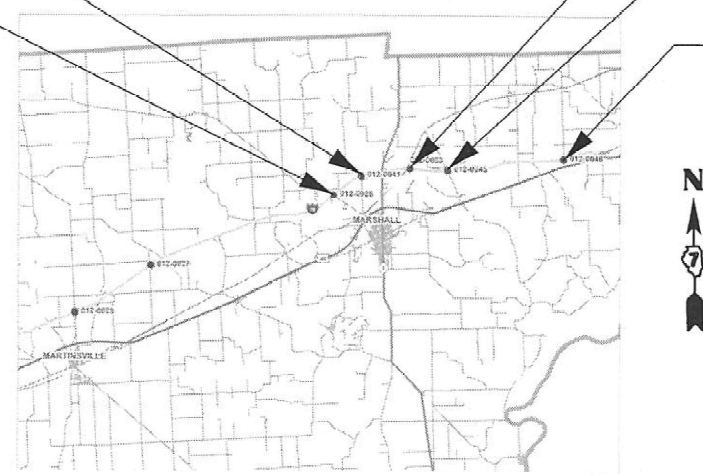

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.  
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION  
1-800-892-0123  
OR 811

PROJECT ENGINEER: MATT BOWER  
PROJECT MANAGER: LEVI LUND

CONTRACT NO. 74D26

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

SUBMITTED AUGUST 5 2024  
*Jeffrey P. Reynolds* REGIONAL ENGINEER

October 4, 2024  
*Scott A. Elk* ENGINEER OF DESIGN AND ENVIRONMENT

October 4, 2024  
*James J. Guerin* DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY  
OF THE STATE OF ILLINOIS

**INDEX OF SHEETS**

<u>SHEET NO.</u>	<u>ITEM</u>
1	COVER SHEET
2	INDEX OF SHEETS
3	SUMMARY OF QUANTITIES & SCHEDULE OF QUANTITIES

**GENERAL NOTES**

ALL LOCATIONS HAVE CORRUGATED METAL PIPES UNDER SLOPE WALLS OF OVERHEAD BRIDGES.  
 ALL LOCATIONS SHALL BE CONSTRUCTED WITH POLYETHYLENE SOLID WALL PIPE WITH SMOOTH INTERIOR  
 CLEANING SEDIMENT FROM EXISTING CULVERT WILL BE REQUIRED AT SOME LOCATIONS. THIS CLEANING OF SEDIMENT WILL NOT BE PAID SEPARATE BUT WILL BE INCLUDED IN THE COST OF "INSERTIONS CULVERT LINER" OF SPECIFIED DIAMETER.  
 ALL AREAS DISTURBED WILL BE RESHAPED AND SEEDED AS NECESSARY.

**HIGHWAY STANDARDS**

000001-08	STANDARD SYMBOLS, ABBREVIATIONS, & PATTERNS
001006	DECIMAL OF AN INCH AND OF A FOOT
701101-05	OFF-RD OPERATIONS, MULTILANE, 15' TO 24" FROM PAVEMENT EDGE
701106-02	OFF-RD OPERATIONS, MULTILANE, MORE THAN 15' AWAY
701400-12	APPROACH TO LANE CLOSURE, FREEWAY/EXPRESSWAY
701406-13	LANE CLOSURE, FREEWAY/EXPRESSWAY, DAY OPERATIONS ONLY
701901-09	TRAFFIC CONTROL DEVICES

MODEL: Index of sheets [Sheet]  
 FILE NAME: c:\p\work\project\lund\101145\ID74D26-shh-gen-notes.dgn

USER NAME = lvi.lund	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 8/6/2024	DATE -	REVISED -

**STATE OF ILLINOIS  
 DEPARTMENT OF TRANSPORTATION**

**INDEX OF SHEETS**

SCALE: SHEET OF 3 SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
70	D7 CULVERT LINING 2025-3	CLARK	3	2
CONTRACT NO. 74D26				
ILLINOIS FED. AID PROJECT				

100% STATE

CODE NO.	ITEM	UNIT	TOTAL QUANTITY	NONE
				0004
				RURAL
54390230	INSERTION CULVERT LINER 36"	FOOT	1485	1485
67100100	MOBILIZATION	L SUM	1	1
70100700	TRAFFIC CONTROL AND PROTECTION, STANDARD 701406	L SUM	1	1

SCHEDULE	INSERTION CULVERT LINER 36"	
STA	(FEET)	
MP 145 I-70 EB SN 012-0028	130	
MP 145 I-70 WB SN 012-0028	135	
MP 146 I-70 EB SN 012-0041	165	
MP 146 I-70 WB SN 012-0041	165	
MP 147.6 I-70 EB SN 012-0003	95	
MP 147.6 I-70 WB SN 012-0003	115	
MP 149 I-70 EB SN 012-0045	180	
MP 149 I-70 WB SN 012-0045	200	
MP 152.8 I-70 EB SN 012-0046	140	
MP 152.8 I-70 WB SN 012-0046	160	
TOTAL:		1485

MODEL: SQO (Sheet)  
FILE NAME: c:\p\work\pwr\stclund\1011454\174\1026-shi-soc.dgn

USER NAME = levi.lund	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 8/6/2024	DATE -	REVISED -

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**SUMMARY OF QUANTITIES &  
SCHEDULE OF QUANTITIES**

SCALE: SHEET OF 3 SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
70	D7 CULVERT LINING 2025-3	CLARK	3	3
CONTRACT NO. 74D26				
ILLINOIS   FED. AID PROJECT				